

# 2023



## FLEET CATALOG

YOUR ONE SOURCE FOR QUALITY BRAND NAME EQUIPMENT,  
TOOLS AND SUPPLIES FOR THE FLEET INDUSTRY.

**ASCOT™**  
Supply Corporation



# BEADBAZOOKA



BB3L2, BB6L2, BB10L2



G471147HD



Bead Bazooka  
Repair Kit BBVRK



G12941R



G12942R



G420303



G471105HD

COVERED BY ONE OR MORE U.S. PATENTS, INCLUDING: PAT. 10,800,216 PAT. 10,800,215 PAT. 10,759,238 PAT. 10,266,019 PAT. 8,752,604 PAT. 9,033,306 PAT. 9,822,893 PAT. 9,649,897 U.S. PAT. 10,214,399 For more information visit: [www.gaithertool.com](http://www.gaithertool.com)



## Count on Murphy's to Keep Your Fleet Business Rolling

### Tire Mounting Lubricants

Used by all major tire companies worldwide, Murphy's lubricants make truck and OTR tire mounting easier.

- premium materials
- consistent quality
- easy application

### Concentrated & Ready to Use Leak Detectors

High performance leak detectors from a world leader in tire mounting products.

### Black Tire Paint

Your go-to for a great retread finish. Quick drying.

- superior hiding versus competitive brands
- designed for use in tire painting machines or brush application
- ready-to-use, water based for easy cleanup
- matte finish



© 2022 JTM Products, Inc.



# TABLE OF CONTENTS

## AIR SYSTEMS

Air Compressors	6
Nitrogen Inflation Systems	14
Filters, Regulators & Lubricators	15
Air Hoses & Hose Products	16
Air Line Couplers & Plugs	18
Hose Fittings & Clamps	20

## AIR TOOLS

RPG Air Tools	21
Air Tools & Accessories	24

## WHEEL SERVICE PRODUCTS

Impact Sockets	34
Torque Wrenches & Torque Accessories	38
Loose Nut Prevention	43
Wheel Centering Products	46
Lug Nut Removal Products	48
Wheel Attaching Hardware	50
Tire & Wheel Service Tools	55
Stud & Hub Cleaning Tools	58

## LIFTING EQUIPMENT

Bottle Jacks	62
Jack Plates	69
Service Jacks	70
Jack Stands	81
Transmission & Specialty Jacks	86
Wheel Dollies	96
Hydraulic Shop Presses & Equipment	100
Brake Drum Handlers	102

## TIRE & WHEEL SERVICE

Tire & Wheel Accessories	104
Tire & Tube Sealants	105
Markers	112
Tire Branders & Accessories	113
Bead Breakers	115
Bead Seaters	120
Chloride Pumps	128
Mount & Demount Tools	130
Locking Ring Tools	135
Heavy Duty Hammers	136

General Purpose Hammers & Wedges	137
Wrenches & Lug Wrenches	138
Shop Service Tools	141
Automatic Tire Inflation Systems	142
Misc Tire Servicing Tools	145
Safety Cages	147

## VALVE HARDWARE

TPMS Tools	151
Tubeless Tire Valves (Truck)	152
Truck & Specialty Valves	153
Valve Caps, Cores & Extensions	158
Special Application Products	160
Valve Hardware Tools	161
Tire Gauges	163
Checking Stations	166
Air Chucks	167
Inflator Gauges	171

## SERVICE EQUIPMENT

Tire Changers & Accessories	175
Wheel Balancers & Accessories	178
Challenger Lifts	179

## WHEEL BALANCING SUPPLIES

Truck Wheel Weights	180
Adhesive Wheel Weights	183
Wheel Weight Displays & Kits	188
Wheel Weight Tools	189
Counteract Balancing Beads	192
MAGNUM+ Tire Balancing	193
EQUAL FLEXX Tire Balancing	194

## ALIGNMENT

Camber/Caster Tools	196
Heavy Duty Alignment	197

## AUTOMOTIVE/FLEET SERVICE EQUIPMENT

Batteries, Chargers & Testers	202
Bench Grinders & Shop Vises	203
Pliers & Screwdrivers	204

Shop Cleaners & Brushes	205
Shop Lights & Service Stickers	207
Interior Protection Products	208
Tire Displays, Racks & Carts	210
Drains & Pumps	211
Oil Accessories	215
Safety Products	216
Wheel Chocks	218
Induction Heaters	219
Mechanic's Gloves	221
Heavy Duty Diagnostics	223
Truck Shop Equipment	225

## FLUID EXCHANGE

Recovery & Recycling Systems	228
Fluid Exchangers & Flushers	229
Fluid Exchange Accessories	230

## TIRE REPAIR MATERIALS

Cabinets	240
Cements, Sealants & Patches	231
Air Buffers & Drills	241
Tire Repair Tools & Accessories	243
Tire Spreaders & Repair Stations	253

## ALPHABETICAL INDEX

## NUMERIC INDEX

Ascot Supply Corporation is not responsible for inadvertent typographical errors or omissions. Images included in this publication may appear different to the actual inventoried item.



**magnum+**

The Perfect Balance  
Between Profits and Efficiency



**THE ORIGINAL  
AND THE BEST**

Put  
Safety  
Into Motion



**Checkpoint®**



by **MARTINS**

**TIRE TOOLS** AND SO MUCH  
MORE **SINCE 1984...**



**ESCO**

The Proper Tools to Keep Your Equipment Moving...



**CHAMPION®**
**AIR COMPRESSORS**


## Advantage Series

The Advantage Series is a fully packaged unit with all of the additional accessories customers need included. Advantage series compressors are typically shipped from the factory in 24 hours or less. Compressors are shipped ready to install and operate. Each new assembled unit comes with a standard three-year standard warranty, with option for a six-year extended warranty with the purchase of an extended warranty kit.

### RECIPROCATING AIR COMPRESSOR

- 5-25 HP • **MAXIMUM PRESSURE:** Up to 175 PSIG • 17.0 to 203.6 ACFM at 175 PSIG • Two Stage, Splash Lubricated
- Tank-Mounted, Simplex and Duplex Models
- Vertical or Horizontal Configurations
- Package comes standard with up to six pre-installed options • Factory filled with ChampLub lubricant • Control panel with control voltage transformer



Ascot No.	Mfg. No.	HP or HPD	Part No.	Pump MFG No.	Volts	Tank Capacity (Gal.)*	175 PSI Rating CFM Del'y	RPM	Dimensions (LxWxH)	Approx Ship Weight (Lbs.)
101-00058	VR5-8	5	ADVA-S01	R-15B	230/1	80V	17.0	737	35 x 27 x 75	590
101-00078	VR5-8	5	ADVA-S05	R-15B	208/3	80V	17.0	737	35 x 27 x 75	590
101-00158	VR5-8	5	ADVA-S126	R-15B	230/1	80V	17.0	737	35 x 27 x 75	590
101-01012	VR5-8	5	ADVA-S03	R-15B	230/3	80V	17.0	737	35 x 27 x 75	590
101-11012	VR5-8	5	ADVA-S148	R-15B	230/3	80V	17.0	737	35 x 27 x 75	590
101-40780	VR7F-8	7.5	ADVA-S168	R-15B	208/1	80V	22.3	949	35 x 27 x 75	630
101-40781	VR7F-8	7.5	ADVA-S13	R-15B	230/1	80V	22.3	949	35 x 27 x 75	630
101-40782	VR7F-8	7.5	ADVA-S17	R-15B	208/3	80V	22.3	949	35 x 27 x 75	630
101-40783	VR7F-8	7.5	ADVA-S15	R-15B	230/3	80V	22.3	949	35 x 27 x 75	630
101-41012	VR10-12	10	ADVA-S21	R-30D	208/3	120V	33.8	718	43 x 30 x 81	895
101-41112	VR10-12	10	ADVA-S19	R-30D	230/3	120V	33.8	718	43 x 30 x 81	895
101-42112	HR10-12	10	ADVA-S25	R-30D	208/3	120H	33.8	718	71 x 32 x 55	895
101-44112	HR10-12	10	ADVA-S23	R-30D	230/3	120H	33.8	718	71 x 32 x 55	895
101-41512	HR15-12	15	ADVA-S33	R-40A	208/3	120H	54.1	776	73 x 36 x 62	1210
101-42512	HR15-12	15	ADVA-S31	R-40A	230/3	120H	54.1	776	73 x 36 x 62	1210
101-43512	HR25-12	25	ADVA-S37	R-70A	208/3	120H	90.7	776	74 x 36 x 65	1557
101-44512	HR25-12	25	ADVA-S35	R-70A	230/3	120H	90.7	776	74 x 36 x 65	1557

\* V: Vertical, H: Horizontal Configuration

www.ascotsupply.com

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**CHAMPION®**

### DUPLEX AIR COMPRESSORS FULLY PACKAGED COMPRESSORS:

Compressors equipped with all of the desired options such as Mounted Magnetic Starter, Low Oil Level Monitor, Automatic Tank Drain, Air-Cooled Aftercooler and Vibration Isolators.

#### DUPLEX FULLY PACKAGED COMPRESSORS:

Two (2) Compressors and accessories supplied in one package provides the flexibility of single operations, alternating between compressors, or duplex operations to meet high air demands • **INCLUDES:** Automatic Tank Drain, Vibration Isolators, Two (2) Mounted Magnetic Starters plus alternator, Low Oil Level Monitors and Air Cooled Aftercoolers.



101-10325

Ascot No.	Mfg. No.	HP	Voltage/Phase	Tank Size	Tank Config.	Pump Mfg. No.	ACFM @175 PSIG	ACAC
101-51120	HR5D-12	5	230/1	120	Horiz.	R-15B	34.6	STD
101-53120	HR5D-12	5	208/3	120	Horiz.	R-15B	34.6	STD
101-54120	HR5D-12	5	230/3	120	Horiz.	R-15B	34.6	STD
101-75120	HR7D-12	7.5	230/1	120	Horiz.	R-30D	51.6	STD
101-75320	HR7D-12	7.5	208/3	120	Horiz.	R-30D	51.6	STD
101-75420	HR7D-12	7.5	230/3	120	Horiz.	R-30D	51.6	STD
101-10325	HR10D-25	10	230/3	250	Horiz.	R-30D	69.6	STD

### CHAMPION GASOLINE AIR COMPRESSORS

- Truck Bed Mountable, ideal for Field Service Applications
- Heavy Duty Two-Stage Compressors • V-Belt Drive with Totally Enclosed Belt Guard • Centrifugal unloader for loadless start prolongs motor life • Gasketless Design • Vibration Isolators included on 30 gallon models • Each new assembled unit comes with a three-year standard warranty, six-year extended warranty

Ascot No.	Mfg. No.	Description
<b>KITS</b>		
106-37831	CC1137831	<b>KOHLER KIT:</b> Maintenance Kit for 14HP Kohler Engine Gasoline Air Compressor. <b>Includes:</b> Pre-filter, air filter, spark plug, fuel filter, engine oil, Champion air filter and compressor oil
106-37832	CC1137832	<b>HONDA KIT:</b> Maintenance Kit for 13HP Honda Engine Gasoline Air Compressor. <b>Includes:</b> Air filter, spark plug, engine oil, Champion air filter and compressor oil

HEAVY DUTY

GASKETLESS DESIGN



102-11530

Ascot No.	Mfg. No.	HP or HPD	Tank Size	Tank Config.	Engine Type	ACFM@175PSIG	RPM	Approx. Ship Weight (lbs.)
102-11530	HGR7-3H	13	30	Horiz.	Honda	23.2	1025	434
102-11560	HGR7-6H	13	60	Horiz.	Honda	23.2	1025	500
102-11880	HGR7-8H	13	80	Horiz.	Honda	23.2	1025	539
102-13730	HGR7-3K	14	30	Horiz.	Kohler	23.2	1025	434
102-13760	HGR7-6K	14	60	Horiz.	Kohler	23.2	1025	500
102-13780	HGR7-8K	14	80	Horiz.	Kohler	23.2	1025	539
101-10325	HR10D-25	10	230/3	250	Horiz.	R-30D	69.6	STD

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com

**CHAMPION®**
**AIR COMPRESSORS**

**CHAMPION GASOLINE  
AIR COMPRESSORS**

• **Truck Bed Mountable, ideal for Field Service Applications** • Heavy Duty Two-Stage Compressors • V-Belt Drive with Totally Enclosed Belt Guard • Centrifugal unloader for loadless start prolongs motor life • Gasketless Design • *Vibration Isolators Included on 30 gallon models* • **Each new assembled unit comes with a three-year standard warranty, six-year extended warranty**

Ascot No. Mfg. No. Description

 GASKETLESS  
DESIGN

 HEAVY  
DUTY


102-11530

**KITS**

106-37831	CC1137831	<b>KOHLER KIT:</b> Maintenance Kit for 14HP Kohler Engine Gasoline Air Compressor. <b>Includes:</b> Pre-filter, air filter, spark plug, fuel filter, engine oil, Champion air filter and compressor oil
106-37832	CC1137832	<b>HONDA KIT:</b> Maintenance Kit for 13HP Honda Engine Gasoline Air Compressor. <b>Includes:</b> Air filter, spark plug, engine oil, Champion air filter and compressor oil

Ascot No.	Mfg. No.	HP or HPD	Tank Size	Tank Config.	Engine Type	ACFM@175PSIG	RPM	Approx. Ship Weight (lbs.)
102-11530	HGR7-3H	13	30	Horiz.	Honda	23.2	1025	434
102-11560	HGR7-6H	13	60	Horiz.	Honda	23.2	1025	500
102-11880	HGR7-8H	13	80	Horiz.	Honda	23.2	1025	539
102-13730	HGR7-3K	14	30	Horiz.	Kohler	23.2	1025	434
102-13760	HGR7-6K	14	60	Horiz.	Kohler	23.2	1025	500
102-13780	HGR7-8K	14	80	Horiz.	Kohler	23.2	1025	539
101-10325	HR10D-25	10	230/3	250	Horiz.	R-30D	69.6	STD

**Centurion**
**CENTURION II | 13 HP  
RECIPROCATING COMPRESSOR/  
GENERATOR**

• Two-stage splash lubricated RV15A compressor pump • Honda GX390 engine with electric start • Industrial 4000-watt generator with (2) 120V, 15 amp and (1) 240V, 20 amp receptacles • Twin 4-gallon horizontal air receiver tanks • Manual receiver drain valve • Lifting hook • Belt drive with totally enclosed belt guard • Gas pilot valve • Comprehensive base plate • **INCLUDES:** (2) Pressure gauges - the left gauge indicates tank pressure and the right gauge indicates output pressure; adjustable pressure regulator; pressure relief valve, air socket



101-73904

**GAS**

Ascot No.	Mfg. No.	PART. No.	ENGINE MODEL	HP	TANK CAP. (GAL)	Pump MFG No.	Continuous Generator with Comp Off-Load	Max. AC Output	RPM	CFM Displ.	Rating CFM Del'y	Dimensions (LxWxH)	Approx. Ship Weight (Lbs.)
101-73904	HGRV7-LPH-G	CC1153480	HONDA GX390	13	(2) 4	RV15A	3500 watts	4000 watts	784	22.9	17.9	46" x 22" x 35"	490

[www.ascotsupply.com](http://www.ascotsupply.com)
**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

# **L-SERIES** **Rotary Screw** **Air Compressors**

The Champion L-Series Rotary Screw Compressors are highly competitive, expertly-designed packages that use the latest design techniques to give you industry-leading **reliability, performance, and value.** When used in 100% duty cycle applications, Rotary Screw compressors from Champion are a great, quiet alternative to a reciprocating compressor.

**STANDARD FEATURES:**

- Advanced but simple package design lowering maintenance and service costs and lengthening service life
- Belt-driven
- Integrated Airends ensure superior serviceability
- Available in fixed and variable speed
- State-of-the-art dual position pilot controller
- High-quality, sound-insulating enclosure panels
- Low-noise, thermostatically-controlled, motor-driven fan
- Tank or basemount with optional dryer configurations (AirStation)
- Zero air-loss auto tank drain on Air Station
- **L-SERIES WARRANTY:** Standard one-year warranty on package, premium ten-year warranty available



101-71023



105-00750

 ADVANCED  
DESIGN

 BELT  
DRIVEN

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

[www.ascotsupply.com](http://www.ascotsupply.com)



## AIR COMPRESSORS



### CHAMPION L-SERIES ROTARY SCREW AIR COMPRESSORS

**CHAMPION**

Ascot No.	Mfg. No.	Drive Motor		Voltages Available	Nominal Pres.Sure		Noise level	Base Mount	
		HP	KW		PSIG	ACFM		Dimensions (LxWxH)	Weight (LBS.)
101-45231	L04	5	4	230 1 phase	100	19.4	68	26" x 24" x 37"	373
				208-230/460/575 3 PH	125	18.4			
				—	190	14.0			
101-57523	L05	7.5	5	230 1 phase	100	22.2	68	26" x 24" x 37"	373
				208-230/460/575 3 PH	125	20.7			
				—	190	16.4			
101-71023	L07	10	7	208-230/460/575 3 PH	100	45.9	71	27" x 25" x 41"	452
				—	125	37.4			
				—	190	30.0			
101-11153	L11	15	11	208-230/460/575 3 PH	100	66.0	73	31" x 28" x 47"	483
				—	125	56.8			
				—	190	46.6			
101-15203	L15	20	15	208-230/460/575 3 PH	100	95.31	74	31" x 28" x 47"	739
				—	125	79.8			
				—	190	63.5			
101-18253	L18	25	18	208-230/460/575 3 PH	100	114.7	74	31" x 28" x 47"	796
				—	125	96.7			
				—	190	82.6			
101-22303	L22	30	22	208-230/460/575 3 PH	100	128.8	68	53" x 35" x 64"	810
				—	125	113.3			
				—	190	92.1			
101-23303	L23	30	22	208-230/460/575 3 PH	100	146.8	68	53" x 35" x 64"	1433
				—	125	121.8			
				—	190	105.2			
101-26353	L26	35	26	208-230/460/575 3 PH	100	170.9	69	53" x 35" x 64"	1493
				—	125	145.8			
				—	190	121.4			
101-29403	L29	40	29	208-230/460/575 3 PH	100	194.9	71	53" x 35" x 64"	1501
				—	125	169.8			
				—	190	145.4			

### AIR STATION SPECIFICATIONS, 60 HZ

Ascot No.	Mfg. No.	Dryer Model	Receiver Size (Gallons)	Refrigerant	Weight (LBS.)			Dimensions (LxWxH)		
					80 GAL.	120 GAL.	240 GAL.	80 GAL.	120 GAL.	240 GAL.
105-00425	L04	CRN25	80, 120, 240	R134A	LESS DRYER 791 WITH DRYER 877	LESS DRYER 874 WITH DRYER 960	LESS DRYER 1226 WITH DRYER 1312	52 x 32 x 68 WITH DRYER 63 x 32 x 68	73 x 32 x 68 WITH DRYER 72 x 32 x 68	90 x 37 x 74 WITH DRYER 88 x 37 x 73.8
					LESS DRYER 882	LESS DRYER 905	LESS DRYER 1226 WITH DRYER 1312	52 x 32 x 68 WITH DRYER 63 x 32 x 68	73 x 32 x 68 WITH DRYER 72 x 32 x 68	90 x 37 x 74 WITH DRYER 88 x 37 x 73.8
					LESS DRYER 855 (387)	LESS DRYER 936 (425)	LESS DRYER 1226 WITH DRYER 1312	52 x 32 x 68 WITH DRYER 63 x 32 x 68	73 x 32 x 68 WITH DRYER 72 x 32 x 68	90 x 37 x 74 WITH DRYER 88 x 37 x 73.8
105-00535	L05	CRN35	80, 120, 240	R134A	LESS DRYER 882	LESS DRYER 905	LESS DRYER 1226 WITH DRYER 1312	52 x 32 x 68 WITH DRYER 63 x 32 x 68	73 x 32 x 68 WITH DRYER 72 x 32 x 68	90 x 37 x 74 WITH DRYER 88 x 37 x 73.8
					LESS DRYER 882	LESS DRYER 905	LESS DRYER 1226 WITH DRYER 1312	52 x 32 x 68 WITH DRYER 63 x 32 x 68	73 x 32 x 68 WITH DRYER 72 x 32 x 68	90 x 37 x 74 WITH DRYER 88 x 37 x 73.8
					LESS DRYER 882	LESS DRYER 905	LESS DRYER 1226 WITH DRYER 1312	52 x 32 x 68 WITH DRYER 63 x 32 x 68	73 x 32 x 68 WITH DRYER 72 x 32 x 68	90 x 37 x 74 WITH DRYER 88 x 37 x 73.8
105-00750	L07	CRN50	80, 120	R134A	LESS DRYER 882	LESS DRYER 905	LESS DRYER 1226 WITH DRYER 1312	52 x 32 x 68 WITH DRYER 63 x 32 x 68	73 x 32 x 68 WITH DRYER 72 x 32 x 68	90 x 37 x 74 WITH DRYER 88 x 37 x 73.8
					LESS DRYER 882	LESS DRYER 905	LESS DRYER 1226 WITH DRYER 1312	52 x 32 x 68 WITH DRYER 63 x 32 x 68	73 x 32 x 68 WITH DRYER 72 x 32 x 68	90 x 37 x 74 WITH DRYER 88 x 37 x 73.8
					LESS DRYER 882	LESS DRYER 905	LESS DRYER 1226 WITH DRYER 1312	52 x 32 x 68 WITH DRYER 63 x 32 x 68	73 x 32 x 68 WITH DRYER 72 x 32 x 68	90 x 37 x 74 WITH DRYER 88 x 37 x 73.8
105-01175	L11	CRN75	80, 120	R134A	LESS DRYER 882	LESS DRYER 905	LESS DRYER 1226 WITH DRYER 1312	52 x 32 x 68 WITH DRYER 63 x 32 x 68	73 x 32 x 68 WITH DRYER 72 x 32 x 68	90 x 37 x 74 WITH DRYER 88 x 37 x 73.8
					LESS DRYER 882	LESS DRYER 905	LESS DRYER 1226 WITH DRYER 1312	52 x 32 x 68 WITH DRYER 63 x 32 x 68	73 x 32 x 68 WITH DRYER 72 x 32 x 68	90 x 37 x 74 WITH DRYER 88 x 37 x 73.8
					LESS DRYER 882	LESS DRYER 905	LESS DRYER 1226 WITH DRYER 1312	52 x 32 x 68 WITH DRYER 63 x 32 x 68	73 x 32 x 68 WITH DRYER 72 x 32 x 68	90 x 37 x 74 WITH DRYER 88 x 37 x 73.8
105-01590	L15	CRN100 CES90	120	R134A	LESS DRYER 1194 (542)	WITH RNC DRYER 1505	LESS DRYER 1265	73 x 32 x 74	80 x 32 x 74	90 x 37 x 74
					LESS DRYER 1194 (542)	WITH RNC DRYER 1505	LESS DRYER 1265	73 x 32 x 74	80 x 32 x 74	90 x 37 x 74
					LESS DRYER 1194 (542)	WITH RNC DRYER 1505	LESS DRYER 1265	73 x 32 x 74	80 x 32 x 74	90 x 37 x 74
105-18125	L18	CRN125 CES120	120	R134A	LESS DRYER 1251 (567)	WITH RNC DRYER 1584 (719)	LESS DRYER 1265	73 x 32 x 74	80 x 32 x 74	90 x 37 x 74
					LESS DRYER 1251 (567)	WITH RNC DRYER 1584 (719)	LESS DRYER 1265	73 x 32 x 74	80 x 32 x 74	90 x 37 x 74
					LESS DRYER 1251 (567)	WITH RNC DRYER 1584 (719)	LESS DRYER 1265	73 x 32 x 74	80 x 32 x 74	90 x 37 x 74
105-22150	L22	CRN150 CES140	120	R134A	LESS DRYER 1265	WITH RNC DRYER 1604	LESS DRYER 1265	73 x 32 x 74	80 x 32 x 74	90 x 37 x 74
					LESS DRYER 1265	WITH RNC DRYER 1604	LESS DRYER 1265	73 x 32 x 74	80 x 32 x 74	90 x 37 x 74
					LESS DRYER 1265	WITH RNC DRYER 1604	LESS DRYER 1265	73 x 32 x 74	80 x 32 x 74	90 x 37 x 74

## LV/LVR-Series Rotary Vane Air Compressors

The LV Series range of compressors is engineered to meet the most stringent of specifications. Their compact, simple, robust and integrated design allows them to fit anywhere undercover. They are easy to install and maintain as well as extremely quiet. The LV Series is available in either tripod or tank mounted versions. They are designed for a wide variety of applications including automobile, car body shops, wood working, dentistry, laundry, packaging and machine tools.

### LV-SERIES SPECIFICATIONS:

- 2-10 hp • Less than 3 ppm oil carryover • Available as a Simplex or Duplex tank mounted unit • Standard starter • **SLOW SPEED:** 1760 RPM • 100% duty cycle • Continuous run or start/stop • TEFC motor • Direct drive • **Standard 2 Year Warranty**



LV-Series: Duplex



LV-Series: Simplex

### LV SERIES: SIMPLEX

Ascot No.	Mfg. No.	HP	KW	Voltage/Phase	Mount. Config.	Tank Style	Tank Cap. (Gal.)	CFM 100 PSIG	CFM 150 PSIG	Noise Level (dBA)	Air Outlet NPT	Oil Cap. (Gal.)	Wt. (Lbs.)	Dimensions (LxWxH)	Starter	After cooler
104-01201	LV01PUTS	2	1	115/208-230 1 Ph	Tripod	N/A	N/A	6.3	4.5	65	3/8"	0.5	130	30" x 11" x 18"	Yes	Yes
104-01202	LV01PURHS-3	2	1	115/208-230 1 Ph	Tank	Horiz.	30	6.3	4.5	65	3/8"	0.5	240	41" x 19" x 34"	Yes	Yes
104-04501	LV04PUTAS	5	4	208-230 1 Ph	Tripod	N/A	N/A	19.5	16	72	1/2"	0.5	315	42" x 24" x 24"	Yes	Yes
104-04502	LV04PURVS-8	5	4	208-230 1 Ph	Tank	Vert.	80	19.5	16	72	1/2"	0.5	570	36" x 26" x 66"	Yes	Yes
104-04503	LV04PURHS-8	5	4	208-230 1 Ph	Tank	Horiz.	80	-	16	72	1/2"	0.5	425	65" x 22" x 40"	Yes	Yes
104-05750	LVR08PURVS-8	7.5	5.5	208-230 1 Ph	Tank	Vert.	80	-	22	72	1/2"	1.15	695	39" x 26" x 69"	Yes	Yes
104-05751	LVR05PURHS-8	7.5	5.5	208-230 1 Ph	Tank	Horiz.	80	-	22	72	1/2"	1.15	550	66" x 22" x 43"	Yes	Yes
104-07101	LVR07PURHS-8	10	7.5	208-230/460 3 Ph	Tank	Horiz.	80	-	28.9	72	3/4"	1.15	670	66" x 22" x 43"	Yes	Yes

### LV SERIES: DUPLEX

Ascot No.	Mfg. No.	HP	KW	Voltage/Phase	Mount. Config.	Tank Style	Tank Cap. (Gal.)	CFM 100 PSIG	CFM 150 PSIG	Noise Level (dBA)	Air Outlet NPT	Oil Cap. (Gal.)	Wt. (Lbs.)	Dimensions (LxWxH)	Starter	After cooler
104-04120	LV04PDRHS-12	5	4	208-230 1 Ph	Tank	Horiz.	120	39	32	75	1/2"	1	845	72" x 27" x 48"	Yes	Yes
104-05127	LVR05PDRHS-12	7.5	5.5	208-230 1 Ph	Tank	Horiz.	120	-	44	76	1/2"	1	1210	76" x 27" x 50"	Yes	Yes
104-07121	LVR07PDRHS-12	10	7.5	208-230 1 Ph	Tank	Horiz.	120	-	57.8	77	3/4"	1	1325	76" x 27" x 50"	Yes	Yes

## AIR COMPRESSORS

# Refrigerated Air Dryers

### SIZING A 3-IN-1 HIGH INLET DRYER

Follow the steps below to size your dryer:

1. Use the table below that identifies your inlet temperature to your dryer.
2. In the chart select the inlet pressure that will be entering your dryer.
3. Determine SCFM to compensate for air line leaks and pressure drops.
4. Select the SCFM requirement for your dryer based on the SCFM coming out of the air compressor.

#### RULE OF THUMB CALCULATION

**ROTARY SCREW AIR COMPRESSOR**  
SCFM = Compressor HP x 4.5

**RECIPROCATING AIR COMPRESSOR**  
SCFM = Compressor HP x 3.5

5. Once the correct HP rating has been selected based on the air volume requirements, you will need to know the type of available electric service to determine the need for a single phase or three phase compressor.

1. Identify the table that shows 120°F (in this example it would be table 3)
2. From the same table (table 3) select the inlet pressure of dryer. In this example (140 PSI).
3. Use Rule of Thumb Calculation to determine SCFM. **20HP x 3.5 = 70 SCFM**
4. Locate 70 SCFM under 140 PSI column. Follow across to dryer part number.

ANSWER: Customer needs part number 3530.

### CHAMPION CRH SERIES HIGH INLET TEMPERATURE REFRIGERATED AIR DRYER

TABLE 1: 180° INLET

Mfg. No.	100 PSIG	150 PSIG	175 PSIG
CRH20	18	22	23
CRH25	23	27	29
CRH35	32	38	41
CRH50	45	54	58
CRH75	68	81	87
CRH100	91	108	116
CRH125	114	135	145

TABLE 2: 150° INLET

Mfg. No.	100 PSIG	150 PSIG	175 PSIG
CRH20	21	25	26
CRH25	26	31	33
CRH35	37	44	47
CRH50	52	62	67
CRH75	78	93	100
CRH100	105	124	133
CRH125	131	155	167

TABLE 3: 120° INLET

Mfg. No.	100 PSIG	150 PSIG	175 PSIG
CRH20	23	29	30
CRH25	30	35	38
CRH35	42	49	53
CRH50	59	70	75
CRH75	88	105	113
CRH100	118	140	151
CRH125	148	176	189

#### REFRIGERATED AIR DRYERS - SPECIAL FEATURES:

- Effective moisture removal at all flow rates
- Combination separator/filter
- Ideal for air compressors equipped with an air cooled aftercooler



Ascot No.	Mfg. No.	Flow	Voltage	In/Out Connect.	SIZE (LxWxH)	Approx. Ship Weight (LBS.)
105-00015	CRN15	15	115/1/60	3/8" OD	15x12.6x12.6	69 Lbs.
105-00025	CRN25	25	115/1/60	1/2" NPT	26x19x21	142 Lbs.
105-00035	CRN35A1	35	115 or 230/1/60	1/2" NPT	26x19x21	146 Lbs.
105-00050	CRN50A1	50	115 or 230/1/60	1/2" NPT	26x19x21	152 Lbs.
105-00075	CRN75A1	75	115 or 230/1/60	3/4" NPT	33x25x26	209 Lbs.
105-00100	CRN100A1	100	115 or 230/1/60	1" NPT	38x29x20	251 Lbs.
105-00125	CRN125A1	125	115 or 230/1/60	1" NPT	38x29x20	273 Lbs.
105-00150	CRN150A1	150	115 or 230/1/60	1" NPT	38x29x20	279 Lbs.



### C-AIRE GAS ENGINE COMPRESSOR

- Two-Stage compressor that is just the right size for a service truck using a 1" or 3/4" impact wrench and is great for farm service use
- INCLUDES: Ball valve, Honda engine, electric start, engine idle down, oil drain tube, tank drain, large displacement 3 cylinder pumps, large oil sight glass, liquid filled gauge, full synthetic oil & mounting pads



102-13030

### C-AIRE SIMPLEX COMPRESSORS

- Oversized after coolers remove over 60% of water vapor, humidity or moisture • Large displacement 3-cylinder pumps run slower thus increasing the longevity and contributes to them being quieter • ALL UNITS INCLUDE: Ball valve, tank drain, oil drain tube, full synthetic oil, large sight glass and liquid fill gauge • Installation kit only included with Fully Packaged units (4 mounting pads, 4 anchor bolts, 12" steel braided flex hose)



101-75080



Ascot No.	Mfg. No.	HP	Stage	CFM @175 PSIG	Pump	Pump RPM	Main Bearings	Oil	Volts	AMPS	Motor RPM	Breaker Size	Tank Size (GAL.)	Dimensions (LxWxH)	Wt. (Lbs.)
101-50080	A050V080-1230	5	2	17	2 Cylinder Cast Iron	885	50,000 Hours	Full Synthetic	208/230, 1 Phase	21.8/208V, 19.1/230V	1745	40 Amp	80	35" x 24" x 70"	515
101-75080	A075V080-1230	7.5	2	24	3 Cylinder Cast Iron	649	50,000 Hours	Full Synthetic	208/230, 1 Phase	33.3/208V, 31.3/230V	1760	50 Amp	80	34" x 24" x 73"	625
102-13030	A130H030-G	13	2	26	3 Cylinder Cast Iron	745	50,000 Hours	Full Synthetic	800	N/A	N/A	N/A	30	42" x 17" x 45"	474

### CHAMPION VOLTAGE CONVERSION KITS

- If 460V, 3 phase service is needed voltage conversion kits are available

Ascot No.	Mfg. No.	Description
106-11727	TEN011727	Voltage Conversion Kit, Simplex - 5HP and 7.5HP from 230V/3 Phase to 460V/3 Phase
106-11728	TEN011728	Voltage Conversion Kit, Simplex - 15HP from 230V/3 Phase to 460V/3 Phase
106-11729	TEN011729	Voltage Conversion Kit, Simplex - 15HP from 230V/3 Phase to 460V/3 Phase
106-11730	TEN011730	Voltage Conversion Kit, Simplex - 25HP from 230V/3 Phase to 460V/3 Phase



106-11727

### CHAMPION MAINTENANCE PARTS

Ascot No.	Mfg. No.	Description
106-28530	M2853	Pilot Unleeder Valve for Gas Compressors
106-89090	PO8909A	Champion Oil, 1-Gallon
106-94730	PO9479A	Champion Oil, 1-Quart
117-05050	PO5050A	Filter Element for Gas and Small Electric Units
117-05051	PO5051A	Filter Element for Large Electric Units
106-11882	Z11882	Compressor Service Kit for RV-15/R-15 Pump INCLUDES: Lubricant, Air Filters & Oil Filter
106-11883	Z11883	Compressor Service Kit for RV-30/R-30 Pump INCLUDES: Lubricant, Air Filters & Oil Filter
106-11884	Z11884	Compressor Service Kit for R-40 Pump INCLUDES: Lubricant, Air Filters & Oil Filter
106-13194	CC1031194	Engine Maintenance Kit for 13 HP Gas Compressors
106-00519	MS19C	Replacement 1/4 NPT Gauge for Compressors







## BRANICK 130 NITROGEN INFLATION SYSTEM

The **MODEL 130** can be used with a nitrogen bottle or connected to a nitrogen generator to inflate up to 6 (4 hoses included) tires with high purity nitrogen. The integrated auto-inflator has a pressure range up to 145 psi and performs top-offs as well as automated nitrogen conversions, just set the pressure and the inflator does the rest. Branick equipment lasts and our Model 130 is no different, with all steel construction to take everyday use. The rechargeable battery has a visible charging indicator to let you know when you're ready to go. The mobility and features of the Model 130 make nitrogen service simple, fast and economical.

- Hands Free Auto-Inflator
- Convert up to 6 tires (requires 2 optional hoses)
- Rechargeable battery with indicator
- Convenient parts tray
- Durable all-steel construction

119-00130

Ascot No.	Mfg. No.	Description
119-00130	130	Branick 130 Nitrogen Inflation System

## NITROGEN INFLATION SYSTEMS



### BRANICK 500 NITROGEN TOWER INFLATION SYSTEM

Branick's tower systems are designed to be durable, easy to operate and efficient. On the inside are PRISM membranes with a 5 year warranty, whose 1.9:1 air input to nitrogen output ratio is the best in the industry. The top quality internal components include an auto shut-off to reduce compressor use. On the outside is an all steel shell for durability with easily accessible front mounted controls and simple to maintain filters, 5 years of free filters are included. Air input and nitrogen output pressure gauges give you performance at a glance. The inline nitrogen purity test port lets you verify that you're getting the purity you need for the job.

- Best Air to Nitrogen Ratio on the Market at 1.9:1
- PRISM Membranes, the industries' best
- Compressor saving auto shut-off
- Simple operation

- Adjustable nitrogen and purity test port
- Air input/nitrogen output pressure gauges
- Small footprint minimizes space



119-00485

TOTALLY AUTOMATIC

COMPLETELY MOBILE

### BRANICK 485 NITROGEN INFLATION SYSTEM

- The 485 is totally automatic and completely mobile, enabling the operator to wheel the unit directly to any vehicle
- Zero installation costs
- No electrical requirements to operate
- Industrial grade HD battery
- Efficient membrane
- Low maintenance cost
- Connect to any air-line and you're inflating tires. Plug and Play!

PRISM MEMBRANES

119-00500



Ascot No.	Mfg. No.	Description
119-00500	500	Branick 500 Nitrogen Tower Inflation System



## FILTERS, LUBRICATORS & REGULATORS



### GENERAL PURPOSE FILTERS

- Removes harmful water condensate, pipe scale, dirt and rust from your compressed air system
- Prevents corrosive damage to compressed air equipment and finished products
- Protects components and air tools from premature failure
- Installed upstream of regulators to prevent valve failure
- Also used as pre-filters to oil removing and coalescing filters to ensure high efficiency and long element life in applications such as paint spraying, instrumentation and pharmaceuticals
- Porous sintered bronze element

Ascot No.	Mfg. No.	Pipe Size	Max. Flow SCFM	Bowl Capacity	Bowl Type	Drain	OPERATING Temp.	Max. Pressure	Filter Element
111-30002	F300-02	1/4"	27	1 Oz.	Poly	Manual	40°-125°F	150 PSIG	20 micron
111-35200	F352	1/4"	48	5 Oz.	Poly	Manual	40°-125°F	150 PSIG	40 micron
111-35201	F352W	1/4"	48	6 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-35202	F352Z	1/4"	48	5 Oz.	Poly	Piston Auto	40°-125°F	150 PSIG	40 micron
111-35203	F352FW	1/4"	48	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	40 micron
111-35300	F353	3/8"	75	5 Oz.	Poly	Manual	40°-125°F	150 PSIG	40 micron
111-35301	F353W	3/8"	75	5 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-35302	F353Z	3/8"	75	6 Oz.	Poly	Piston Auto	40°-125°F	150 PSIG	40 micron
111-35303	F353FW	3/8"	75	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	40 micron
111-35400	F354	1/2"	100	5 Oz.	Poly	Manual	40°-125°F	150 PSIG	40 micron
111-35401	F354W	1/2"	100	6 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-35402	F354Z	1/2"	100	5 Oz.	Poly	Piston Auto	40°-125°F	150 PSIG	40 micron
111-35403	F354FW	1/2"	100	6 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	40 micron
111-37600	F376W	3/4"	230	10 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron
111-37601	F376FW	3/4"	230	10 Oz.	Metal	Float Auto	40°-120°F	175 PSIG	40 micron
111-32908	F329-08	1"	300	29 Oz.	Metal	Manual	40°-160°F	250 PSIG	40 micron

### LUBRICATORS

- Injects a fine stream of oil into the air stream to automatically lubricate air operated tools and other devices
- Extends life of downstream components
- Precise control of oil feed with needle valve adjustment knob
- Adds minimal pressure drop to the air system

- Features three position non-rising knob: push to lock, pull to adjust, detach to make tamper resistant
- High air flow
- Precise visual adjustment control
- Low flow to establish drip rate
- "W" is with sight glass and metal bowl

Ascot No.	Mfg. No.	Pipe Size	Max. Flow SCFM	Bowl Cap.	Bowl Type	Operating Temp.	Max. Pressure	Oil Delivery
113-01352	L352W	1/4"	16	5 Oz.	Metal	40°-175°F	200 PSIG	2 SCFM
113-01354	L354W	1/2"	142	5 Oz.	Metal	40°-175°F	200 PSIG	2 SCFM

### REGULATORS

- Specialized control valve reduces upstream supply pressure level to a specified constant downstream pressure
- Regulates air pressure of the airline
- Self-relieving style units

- Available in T-handle or adjustment knob
- Adjustment knob features three position non-rising knob: push to lock, pull to adjust, detach to make tamper resistant
- Reinforced diaphragm for repeated accuracy

Ascot No.	Mfg. No.	Pipe Size	Max. Flow SCFM	Adjustment Type	Pressure Gauge Part No.	Gauge Part	Operating Temp.	Operating Pressure
112-00162	R162	1/4"	25	Adjustment Knob	117-01681*	1/8" NPT	40°-120°F	5 to 125 PSIG
112-00262	R262**	1/4"	25	Adjustment Knob	117-01681*	1/8" NPT	40°-120°F	5 to 125 PSIG
112-00352	R352	1/4"	50	Adjustment Knob	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-00353	R353	3/8"	80	Adjustment Knob	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-00354	R354T	1/2"	100	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-00376	R376T	3/4"	220	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-00378	R378T	1"	250	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-03910	R3910	1-1/4"	700	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-03912	R3912	1-1/2"	700	T-Handle	117-01481*	(2) 1/4" NPT	40°-120°F	5 to 125 PSIG
112-01352	R352T	1/4"	Regulator - T-Handle					
112-01354	R354GH	1/2"	High Pressure Regulator - 10 to 250 PSI					



111-30002




111-35201



113-00353



113-01353



112-00378



112-00352



## AIR HOSES & ACCESSORIES



### 1/2" ULTRAFLEX AIR HOSE

- Specially designed hose that has been developed to cater to today's high demand conditions and use
- Stays flexible in the cold and does not kink in the heat
- Full airflow in all weather conditions
- 300 psi working pressure
- 3/8" male fittings
- Available in 32', 65' and 100' lengths



### COUPLED AIR HOSES

- Reinforced with heavy duty polyester cord



HEAVY DUTY

Ascot No.	Mfg. No.	Description
121-56323	56.3234RPG	1/2" x 32' UltraFlex Air Hose - 300 PSI
121-56324	56.3245RPG	1/2" x 65' UltraFlex Air Hose - 300 PSI

### RPG HIGH PERFORMANCE BLOW GUN KIT

- Produces more air flow than standard blow guns, fits any hose with 1/4" NPT thread, variable flow trigger provides precise control
- Maximum working pressure 120PSI
- Kit includes high performance blow gun, ultimate flow tip, rubber tip, quiet flow nozzle, 6" extension, 3" needle and reducer



Ascot No.	Mfg. No.	Description
128-00006	HPBGK-7	RPG 7-Piece High Performance Blow Gun Kit

### 1/2" X 50' AIR HOSE REEL

- Mounting base is slotted and roller arm has 5 positions for multiple mounting configurations.
- Heavy steel construction adds durability and longer life cycles
- Rubber air hose with heavy-duty crimping and spring guard ensure longevity
- Automatic return via heavy-duty sealed spring with 8 locking stops, roller guide and ball stop
- 300 PSI maximum pressure
- Ship weight 53 lbs



125-00760  
Air Hose Reel

Ascot No.	Mfg. No.	Description
125-00760	760	3/8" X Air Hose Reel
126-00761	761	1/2" X Air Hose Reel

Ascot No.	Mfg. No.	Description
121-01225	98101646	Coupled 1/2" x 25' Reinforced Domestic Air Hose
121-01250	98101648	Coupled 1/2" x 50' Reinforced Domestic Air Hose
121-03825	98101640	Coupled 3/8" x 25' Reinforced Domestic Air Hose
121-03851	98101642	Coupled 3/8" x 50' Reinforced Domestic Air Hose

### 1/4" BULK DOMESTIC AIR HOSE

- Used in automotive, agricultural and construction applications • 1/4" ID x 325 PSI • Temp Range: -40°F to +200°F • Multi-spiral polyester yarn reinforcement makes hose easy to handle and very flexible
- EPDM tube and cover resists abrasion, heat and ozone
- MADE IN THE USA



121-14700

HEAVY DUTY

Ascot No.	Mfg. No.	Description
121-14700	91008400	1/4" x 700' Domestic Bulk Air Hose (325 PSI) Reel

## AIR HOSES & ACCESSORIES



### HEAVY DUTY INDUSTRIAL REELS

- Compact design
- Substantial support
- Air/Water (OLP), Oil (OMP) or Grease (OHP)
- All-steel construction with engineered ribs/forms
- Baked-on powder coat finish provides corrosion resistance
- MADE IN THE USA



126-07850



COMPACT DESIGN

CORROSION RESISTANT FINISH

ALL-STEEL BUILD

Ascot No.	Mfg. No.	Hose ID	Hose OD	Hose Length	Hose PSI	Temp.
125-07650	7650 OLP	3/8"	.688	50'	300	150° F
125-07670	7670 OLP	3/8"	.688	70'	300	150° F
126-07850	7850 OLP	1/2"	.844	50'	300	150° F
125-07651	7650 OMP	3/8"	.690	50'	2250	210° F
126-07851	7850 OMP	1/2"	.815	50'	2000	210° F
124-07450	7450 OHP	1/4"	.590	50'	5000	210° F
125-07652	7650 OHP	3/8"	.750	50'	4000	210° F

## AIR LINE COUPLERS & PLUGS



TYPE A

### 1/4" LINCOLN LONG NOSE

- Brass plated couplers with hardened steel balls and stainless steel springs
- Plugs heat-treated to reduce wear on critical mating surfaces • Interchange with Lincoln "Long Nose Series" as well as units produced by other manufacturers



131-61486



131-61550

131-61548

Ascot No.	DILL NO.	MILTON NO.	AMFLO. NO.	SCHRADER No.	THREAD	NPT
<b>COUPLERS</b>						
131-61486	N/A	794	C27	598392	Male	1/4"
131-61548	123	790	C28	506329	Female	1/4"
<b>ADAPTER PLUGS</b>						
131-61550	126	791	CP27	700665	Male	1/4"
131-61551	125	792	CP28	700664	Female	1/4"

TYPE B

### 1/4" ARO SERIES

- Brass plated couplers with hardened steel balls and stainless steel springs • Plugs heat-treated to reduce wear on critical mating surfaces • Interchange with Aro 210 series as well as units produced by other manufacturers
- Maximum working pressure 300 PSI



131-08888



131-61528

Ascot No.	DILL NO.	MILTON NO.	SCHRADER No.	AMFLO. NO.	THREAD	NPT
<b>COUPLERS</b>						
131-61526	8888	775	506599	C38	Female	1/4"
131-61527	N/A	776	3525	C37	Male	1/4"
131-08888	Push-to-Connect	775	Dill 8888	Push-to-Connect	Female	1/4"
<b>ADAPTER PLUGS</b>						
131-61529	8889	778	700757	CP38	Female	1/4"
131-61528	8891	777	700776	CP37	Male	1/4"



## AIR LINE COUPLERS & PLUGS

**TYPE C**

### 1/4" AUTOMOTIVE STANDARD (TRU-FLATE)

- Brass plated couplers with hardened steel balls and stainless steel springs • Plugs heat-treated to reduce wear on critical mating surfaces • Interchange with Tru-Flate 10 and 100 type series as well as units produced by other manufacturers
- Maximum working pressure 300 PSI



Ascot No.	DILL NO.	MILTON NO.	AMFLO. NO.	SCHRADER No.	THREAD	NPT
<b>COUPLERS</b>						
131-61523	D-13	785	C2	506079	Female	1/4"
131-61524	D-12	786	C1	506009	Male	1/4"
131-62523	D-13R				Female	1/4"
<b>ADAPTER PLUGS</b>						
131-61539	D-3C	784	CP2	700691	Female	1/4"
131-61538	D-2C	783	CP1	700735	Male	1/4"

**TYPE F**

### 1/2" TRUE-FLATE SERIES

- Brass plated couplers with hardened steel balls and stainless steel springs • Plugs heat-treated to reduce wear on critical mating surfaces • Maximum working pressure 300 PSI



Ascot No.	DILL NO.	MILTON NO.	AMFLO. NO.	SCHRADER No.	THREAD	NPT
<b>COUPLERS</b>						
133-61563	D-17	1815	C10	503140	Female	1/2"
133-61564	D-16	1816	C9	503104	Male	1/2"
133-61471	D-17R	—	C10R	—	Female	1/2"
<b>ADAPTER PLUGS</b>						
133-61569	D-3F	1818	CP10	700725	Female	1/2"
133-61568	D-2F	1817	CP9	700626	Male	1/2"
133-61474	D-0F	1819	CP9-D3	3537	Male	3/8"
133-01855	N/A	1855	N/A	1855	Male	1/4"

**TYPE D**

### 1/4" INDUSTRIAL INTERCHANGE SERIES

- Brass plated couplers with hardened steel balls and stainless steel springs • Plugs heat-treated to reduce wear on critical mating surfaces • Interchange with Aro, Foster, Milton as well as units produced by other manufacturers
- Maximum working pressure 300 PSI



Ascot No.	DILL NO.	MILTON NO.	AMFLO. NO.	SCHRADER No.	THREAD	NPT
<b>COUPLERS</b>						
131-61573	102	715	C20	506089	Female	1/4"
131-61574	103	716	C21	506249	Male	1/4"
<b>ADAPTER PLUGS</b>						
131-61578	110	727	CP21	700677	Male	1/4"
131-61579	109	728	CP20	700688	Female	1/4"

**TYPE G**

### 3/8" AUTOMOTIVE SERIES

- Brass plated couplers with hardened steel balls and stainless steel springs • Plugs heat-treated to reduce wear on critical mating surfaces • Maximum working pressure 300 PSI



Ascot No.	DILL NO.	MILTON NO.	AMFLO. NO.	SCHRADER No.	THREAD	NPT
<b>COUPLERS</b>						
132-61476	D-15C	1803	C8	502191	Male	1/4"
132-61478	N/A	1804	C7	502181	Female	1/4"
132-61553	D-15C	1805	C6	502141	Female	3/8"
132-61554	N/A	1806	C5	502105	Male	3/8"
<b>ADAPTER PLUGS</b>						
132-61481	D-1E	1810	CP8	700835	Female	1/4"
132-61480	D-0E	1809	CP7	700750	Male	1/4"
132-61559	D-3E	1808	CP6	700647	Female	3/8"
132-61558	D-2E	1807	CP5	700752	Male	3/8"
133-01855			1855		Male	1/4"

## AIR LINE ACCESSORIES

**OETIKER**

### OETIKER 2-EAR CLAMPS

- Especially suited for industrial or heavy vibrating equipment • Medium pressure clamp that is used for maintenance and OEM applications • Rubber hose, plastic tubing, coaxial and electrical cable, rope are easily clamped
- **APPLICATIONS:** For air, fluid, gas and steam line



### OETIKER 2-EAR CLAMP SERVICE KIT

- **SERVICE KIT CONTAINS THE FOLLOWING SIZES:** (15) 5/16"; (15) 7/16"; (15) 1/2"; (15) 9/16"; (12) 5/8"; (12) 3/4"; (12) 7/8"; (12) 15/16"; (12) 1"; and (1) pair straight jaw pinchers


**316-91098**

Ascot No.	Description
316-91098	Complete Kit
316-01098	Pincer Only

### PINCH CLAMPS

- Made from stainless steel • Feature a specialized tongue-in-groove design to provide a tight, secure seal • Tamper evident design • Ideal for both flexible and inflexible thin-walled hoses
- Smooth-edged bandsteel design prevents damage to hoses


**316-00102**

Ascot No.	Mfg. No.	Nominal Size	Inches Closed-Open	MM Closed-Open	Inner Inches	Width of Ear
316-00507	507	1/4"	.197-.276"	5-7 mm	.236"	6.0 mm
316-00709	709	5/16"	.276-.354"	7-9 mm	.276"	7.0 mm
316-00911	911	7/16"	.355-.433"	9-11 mm	.276"	7.0 mm
316-01113	1113	1/2"	.433-.512"	11-13 mm	.276"	7.0 mm
316-01315	1315	9/16"	.512-.591"	13-15 mm	.295"	7.5 mm
316-01517	1517	19/32"	—	—	—	—
316-01518	1518	5/8"	.591-.708"	15-18 mm	.315"	8.0 mm
316-01720	1720	3/4"	.669-.787"	17-20 mm	.335"	8.5 mm
316-01922	1922	13/16"	.748-.866"	19-22 mm	.354"	9.0 mm
316-02023	2023	7/8"	.787-.905"	20-23 mm	.354"	9.0 mm
316-02225	2225	15/16"	.866-.984"	22-25 mm	.394"	10.0 mm
316-02327	2327	1"	.905-1.063"	23-27 mm	.394"	10.0 mm
316-03740	3740	1-1/2"	—	—	—	—

Ascot No.	Mfg. No.	Description
316-00012	PEC12	1/2" Pinch Clamp
316-00058	PEC58	5/8" Pinch Clamp
316-00078	PEC78	7/8" Pinch Clamp
316-00716	PEC716	7/16" Pinch Clamp
316-00916	PEC916	9/16" Pinch Clamp
316-02332	PEC2332	23/32" Pinch Clamp
316-00102	CSC-102	Handheld Pinch Clamp Crimper

## HOSE FITTINGS, CLAMPS & ACCESSORIES

**PLEWS & EDELMANN**

### SOLID BRASS FEMALE CROSSES

• Excellent for running several air lines from a common supply hose



136-00344

Ascot No.	Mfg. No.	NPT Thread
136-00344	344X	1/4"
136-00366	366X	3/8"

### BRASS IN-LINE SWIVELS

• Simple design is excellent to stop hoses from kinking or for use in pneumatic equipment applications



136-02366

Ascot No.	Mfg. No.	NPT Thread
136-02344	344R	1/4" Male/Female NPT
136-02366	366R	3/8" Male/Female NPT

**MILTON INDUSTRIES, INC.**

### SOLID BRASS FEMALE TEES

• Use to run two lines from a common feed



136-01366

Ascot No.	Mfg. No.	NPT Thread
136-01344	655	1/4"
136-01366	655-1	3/8"

### SOLID BRASS SWIVEL

• Simple design is excellent to stop hoses from kinking or for use in pneumatic equipment applications



136-34490

Ascot No.	Mfg. No.	NPT Thread
136-34490	660	1/4" Male/Female Swivel

### STANDARD MALE HOSE BARB FITTINGS

• Select fitting to match hose ID • Fittings must be secured to hose with either a hose clamp or crimped-on ferrule



136-71606

Ascot No.	Mfg. No.	NPT Thread	Hose ID
136-00401	600	1/4"	1/4"
136-00604	604	3/8"	1/4"
136-00406	602	1/4"	3/8"
136-00606	603	3/8"	3/8"
136-00806	806	1/2"	3/8"
136-00408	408	1/4"	1/2"
136-00608	604	3/8"	1/2"
136-00808	604-1	1/2"	1/2"
136-71404	07001-0404	1/4"	1/4"
136-71504	07001-0504	5/16"	1/4"
136-71604	07001-0604	3/8"	1/4"
136-71606	07001-0606	3/8"	3/8"
136-71806	07001-0806	1/2"	3/8"
136-71808	07001-0808	1/2"	1/2"

### STANDARD FEMALE HOSE BARB FITTING

Ascot No.	Mfg. No.	NPT Thread
136-72404	07002-0404	1/4" x 1/4" Female Hose Barb



136-72404

[www.ascotsupply.com](http://www.ascotsupply.com)

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## AIR TOOLS & ACCESSORIES

**RPG™**


155-17786

156-17786

### RPG 1" DRIVE SUPER DUTY AIR IMPACT WRENCH

• 6" extended anvil • Steel end plates • **WORKING TORQUE RANGE:** 1,600-1,800 ft./lbs. • **FREE SPEED:** 4,500 RPM • **MAXIMUM TORQUE:** 1,800 ft./lbs. • Replacement parts available\*



155-26464

### RPG 1" DRIVE MINI PLUS AIR IMPACT WRENCH

• 6" extended anvil • 3-position power setting • Rubber-coated side handle for added comfort • Powered by the twin hammer clutch • **FREE SPEED:** 5,000 RPM • **MAXIMUM TORQUE:** 2,000 ft./lbs.

### RPG 1" & #5 SPLINE DRIVE SUPER DUTY IMPACT WRENCH

• 6" extended anvil • 3-position forward and reverse • High efficiency 6-vane motor • Swoop-back side handle for maneuverability and balance • Pinless clutch mechanism • **WORKING TORQUE RANGE:** 1,800-2,000 ft./lbs. • **FREE SPEED:** 5,000 RPM • **MAXIMUM TORQUE:** 2,000 ft./lbs.



155-12856

156-12856

### IMPACT WRENCH SPECIFICATIONS

Ascot No.	Mfg. No.	Square Drive	Free Speed (RPM)	Max Torque (Ft./Lbs.)	Air Pressure (PSI)	Air Con. Avg. (CFM)	Air Inlet (NPT)	Hose Size	Length	Weight (Lbs.)
155-12856	A2856	1"	5,000	2,000	—	12	1/2"	3/4"	20.5"	27.6
155-17786	A778-6	1"	4,500	1,800	90	8.4	1/2"	3/4"	20.3"	26.59
155-26464	A26464	1"	5,000	1,800	90	9	1/2"	3/4"	19.2"	17.86
156-12856	A2856SP	#5 Spline	5,000	2,000	—	12	1/2"	3/4"	20.5"	27.6
156-17786	A778SP-6	#5 Spline	4,500	1,800	90	8.4	1/2"	3/4"	20.3"	26.59

### REPLACEMENT PARTS

Ascot No.	Mfg. No.	Description
175-10026	#26	Set of 6 Rotor Blades for A778-6 1" Drive Impact Wrench
175-10037	#37	Hammer for A778-6 1" Drive Impact Wrench
175-10040	#40	Hammer Cage for A778-6 1" Drive Impact Wrench
175-10043	#43	Replacement Side Handle Kit for A778-6 1" Drive Impact Wrench
176-18406	A778-6TK	Tune-Up Kit for A778-6 1" Drive Impact Wrench



175-10026

175-10040

175-10037

175-10043

175-18406

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

[www.ascotsupply.com](http://www.ascotsupply.com)





## AIR TOOLS &amp; ACCESSORIES



## RPG 1/2" DRIVE SUPER DUTY AIR IMPACT WRENCH

- 2" extended anvil
- **FREE SPEED:** 8000 RPM
- **MAXIMUM TORQUE:** 600 ft./lbs.
- Proven design and the most popular configuration in the tire service industry
- Powered by the durable and high performing twin hammer mechanism
- Handle exhaust



153-23121

154-10261



## RPG 3/4" DRIVE IMPACT WRENCH

- Short anvil
- 6-position power setting
- **FREE SPEED:** 5,500 RPM
- **MAXIMUM TORQUE:** 1,100 ft./lbs.
- The most powerful 3/4" drive classic wrench
- Suitable for tire or engine work on truck, bus or farm machinery

## RPG 1/2" DRIVE COMPOSITE IMPACT WRENCH W/ EXTENDED ANVIL

- Convenient one-hand operated forward/reverse push button
- Four-setting torque adjustment switch
- Compact with a total length of only 7.2"
- Twin hammer mechanism provides smooth balance
- Feather trigger for precise speed control
- Energy efficient motor for maximum performance & long life
- Swivel air inlet prevents hose from twisting



153-12260

ONE-HAND  
PUSH  
BUTTON

## IMPACT WRENCH SPECIFICATIONS

Ascot No.	Mfg. No.	Square Drive	Free Speed (RPM)	Max Torque (Ft./Lbs.)	Air Pressure (PSI)	Air Con. Avg. (CFM)	Air Inlet (NPT)	Hose Size	Length	Weight (Lbs.)
153-22131	SS-A2131-COMP	1/2"	8,000	700	90	4	1/4"	3/8"	7.6"	4.74
153-33120	A2312G	1/2"	8,000	600	90	4	1/4"	3/8"	8-1/8"	5.6
154-10261	A261	3/4"	5,500	1,100	—	9.5	3/8"	1/2"	8.2"	12.9
153-12260	A2131-2COMP	1/2"	7,500	685	90	5	1/4"	3/8"	7.2"	4.5

www.ascotsupply.com

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).


## RPG HIGH SPEED TIRE BUFFER WITH OVERHOSE KIT

- **Jacobs chuck for holding buffing accessories** • Lock-off throttle • **FREE SPEED:** 22,000 RPM
- **APPLICATIONS:** Tire patchwork, roughing areas for recapping and cleaning tire moldings
- Includes overhose kit



158-10871

## RPG LOW SPEED TIRE BUFFER WITH QUICK CHANGE SLIP CHUCK

- Brass bushings provide performance and durability in tough working conditions • Includes whip hose and exhaust hose • Quick change slip chuck for fast and easy change of buffing wheel • Built-in regulator • Lock off throttle to prevent accidental start ups • Rear exhaust directs air away from the work area • Ideal for patchwork, roughing areas for recapping and cleaning tire moldings • Overhose Kit also Available Separately (175-00873)



158-10873

## RPG HIGH SPEED BUFFER KIT WITH QUICK CHANGE CHUCK

- **Quick change chuck for holding buffing accessories** • Lock-off throttle • **FREE SPEED:** 22,000 RPM • **APPLICATIONS:** Tire patchwork, roughing areas for recapping and cleaning tire moldings
- Includes overhose kit



158-11871

## RPG 1/4" MINI ANGLE DIE GRINDER

- Compact, lightweight design for easy use
- **APPLICATIONS:** High speed blending, smoothing, porting and deburring in confined areas
- Right angle for easy maneuvering • **FREE SPEED:** 22,000 RPM



157-10875

## TIRE BUFFER SPECIFICATIONS

Ascot No.	Mfg. No.	Description	Free Speed (RPM)	Length
158-10873	A873K	Low Speed Tire Buffer with Quick Change Chuck	2,800	1.75"
158-10871	A871K	High Speed Tire Buffer with Overhose Kit	22,000	2.5"
158-11871	A871K-QC	High Speed Buffer Kit with Quick Change Chuck	22,000	1.75"
157-10875	A875	RPG 1/4" Mini Angle Die Grinder	22,000	5"

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com



### RPG 3" CUT-OFF TOOL

Adjustable speed regulator for precise control • Lock-off throttle to prevent accidental start-up • Rear exhaust directs air away from work area • Durable gears for top performance and long life • **FREE SPEED:** 22,000 RPM



157-10874

Ascot No.	Mfg. No.	Description
157-10874	A874	3" Cut-Off Tool

### RPG 1/2" REVERSIBLE AIR DRILL

• Quick change chuck retainer • Exhaust hose • Side handle • **FREE SPEED:** 500 RPM • **CHUCK SIZE:** 1/2" • Swivel air inlet for ease of use



#### REPLACEMENT PARTS FOR 1/2" REVERSIBLE AIR DRILL

Ascot No.	Mfg. No.	Description
175-01035	253340	Side Handle Kit for A1035 Air Drill
175-11035	H025	Air Hose Exhaust Kit for A1035 Air Drill
157-01035	A1035	1/2" Air Drill w/ Quick Change Chuck and Exhaust Hose

## AIR TOOLS & ACCESSORIES



### MOBILE WHEEL WORK STATION

- Features gas-strut assisted boom that supports the weight of those heavy impact wrenches
- The suspended impact wrench is capable of rotating to the operator desired position
- Features side and rear storage compartments designed to organize sockets, tire irons, lubricants, hoses and various wheel parts
- Air wrench is supported and held in desired position
- Air wrench suspension boom allows for directional freedom and reduces damage

Ascot No.	Mfg. No.	Description
515-00555	WS-005	Mobile Wheel Work Station



515-00555



### 1/2" SUPER DUTY AIR IMPACT WRENCH-TIRE TOOL

• Patented spring hammer clutch for smooth operation and extended durability • Low air consumption and high torque make this tool very efficient • **ULTIMATE TORQUE:** 665 ft./lb. • Comfort and control with new ergonomic grip and trigger • **SUITED FOR ALL MAINTENANCE APPLICATIONS:** Light vehicle tire changing operations, light vehicle mechanical repair, MRO applications



153-07336

NEW GRIP &amp; TRIGGER

Ascot No.	Mfg. No.	Description
153-00736	CP7736	1/2" Super Duty Air Impact Wrench-Tire Tool
153-07336	CP7736-2	2" Extended Anvil

### 1/2" SUPER DUTY AIR IMPACT WRENCH

• Tackle the tough jobs with the power and speed of this true workhorse • Patented clutch provides smooth operation and extreme durability • One hand push button forward reverse power regulator • 4 positive power settings in forward and ultimate power in reverse • Compact design with comfortable contoured handle • **ULTIMATE TORQUE:** 610 ft./lb.



153-17492



Ascot No.	Mfg. No.	Description
153-07492	CP-749	1/2" Impact Wrench
153-17492	CP-749-2	2" Extended Anvil

### 1/2" SUPER DUTY AIR IMPACT WRENCH-TIRE TOOL

• 960 ft./lb. of torque (1,300 Nm) • Hard anodized end plates • Hard chromium aluminum cylinder • Twin hammer mechanism • Lightweight due to the Composite motor housing • **COMPACT:** Only 6.6" long • Curved handle with rubber material resistant to most chemicals used in workshops • Full teasing trigger • 360° swivel air inlet • Friction ring socket retainer



153-07748

153-77482

Ascot No.	Mfg. No.	Description
153-07748	CP7748	1/2" Super Duty Air Impact Wrench-Tire Tool
153-77482	CP7748-2	2" Extended Anvil

### 1/2" HEAVY DUTY AIR IMPACT WRENCH

• Side-To-Side (S2S) forward/reverse functionality • Perfectly balanced to reduce strain on wrist and forearm • Twin hammer mechanism • **ULTIMATE TORQUE:** 955 ft./lb.



153-77492

FEATURES S2S (SIDE-TO-SIDE)

PERFECT BALANCE

Ascot No.	Mfg. No.	Description
153-07749	CP7749	1/2" Impact Wrench
153-77492	CP7749-2	2" Extended Anvil





## AIR TOOLS & ACCESSORIES



### 3/4" HEAVY DUTY AIR IMPACT WRENCH

- Smoothest operating 3/4" impact on the market
- One hand push button forward/reverse power regulator
- Handle exhaust with 360° air inlet swivel
- **APPLICATIONS:** spring work, truck and bus maintenance, farm machines & construction equipment
- **ULTIMATE TORQUE:** 1,000 ft./lbs.



Ascot No.	Mfg. No.	Description
154-00772	CP772H	3/4" Impact Wrench
154-01772	CP772H-6	6" Extended Anvil

### 3/4" SUPER DUTY AIR IMPACT WRENCH - "D" HANDLE

- Great performance
- Lightweight
- Comfort
- Easy to use
- Rugged and robust
- Easy operation
- 1300 ft./lbs. - 1760 Nm of maximum torque in reverse



Ascot No.	Mfg. No.	Description
154-27763	CP7763D	1" Short Shank
154-37763	CP7763D-6	6" Extended Anvil

### 1" SUPER DUTY AIR IMPACT WRENCH

- 14.5 lbs. (6.6 kg)
- Twin hammer mechanism
- Steel motor
- Intuitive forward/reverse lever & power regulator on both sides
- 4-position power settings on both sides
- Down exhaust
- Side handle with soft touch grip
- Aluminum housing
- Composite cover on the clutch housing
- Socket retainer ring
- 1300 ft./lbs. - 1760 Nm maximum torque in reverse



Ascot No.	Mfg. No.	Description
155-07773	CP7773D	1" Short Shank
155-77736	CP7773D-6	6" Extended Anvil

### 1" HEAVY DUTY AIR IMPACT WRENCH

- 2140 ft./lbs. 2900 Nm of maximum torque in reverse
- Pinless closed reinforced rocking dog impact mechanism
- Socket retainer ring combined with hole retainer
- Ergonomic side handle
- Full teasing trigger
- Regulator with integrated forward/reverse with 3-position power settings in both directions



Ascot No.	Mfg. No.	Description
155-07782	CP-7782	1" Short Anvil
155-77826	CP-7782-6	6" Extended Anvil
155-17782	CP-7782-SP6	#5 Spline with 6" Extended Anvil



### 1" HEAVY DUTY AIR IMPACT WRENCH

- High performance clutch provides longer life under tough conditions
- High-efficiency 6 vane motor for maximum performance
- Bottom exhaust directs exhaust away from the operator
- Three position power regulator with directional control
- **ULTIMATE TORQUE:** 1,450 ft./lbs.

Ascot No.	Mfg. No.	Description
155-07778	CP-7778	1" Short Shank
155-77786	CP-7778-6	6" Extended Anvil
155-27786	CP-7778SP-6	#5 Spline with 6" Extended Anvil

### 1" SUPER DUTY AIR IMPACT WRENCH

- Rocking dog clutch for smooth operation and extreme durability
- Teasing throttle for easy bolt starting
- Convenient reverse valve for easy directional changes
- Choice of professional mechanics for high volume tire work on trucks, buses and heavy equipment
- **ULTIMATE TORQUE:** 1,400 ft./lbs.

Ascot No.	Mfg. No.	Description
155-07971	CP-797	1" Short Shank
155-07976	CP-797-6	6" Extended Shank
156-79716	CP-797SP-6	6" Extended Shank and #5 Spline

### 1" NON-IMPACT WRENCH (BLUE TORK)

- Two pneumatic motors for rundown and final tightening
- Preset and adjustable shut off for torque control
- Quality: Precise, accurate tightening to the manufacturer's recommended torque and angle specifications
- Environment
- Improvements: by increasing durability of the tools, we reduce waste
- **ERGONOMICS:** very low noise level, virtually no vibration
- **EFFICIENCY:** Precise and accurate tightening, less fatigued operators
- Maximum Torque: 660 ft./lb.



Ascot No.	Mfg. No.	Description
168-07600	CP7600x-B	Non-Reversible Single Torque Preset
168-07602	CP7600x-B-R	Reversible Single Torque Preset
168-07603	CP7600x-B-R4P	Reversible 4 Torque Preset Selector

### HIGH SPEED TIRE BUFFER KIT

- Jacobs chuck for holding buffing accessories • Lock-off throttle
- **APPLICATIONS:** Tire patchwork, roughing areas for recapping and cleaning tire moldings • **FREE SPEED:** 22,000 RPM

Ascot No.	Mfg. No.	Description
158-00871	CP871K	Includes Over Hose
158-01871	CP871	High Speed Tire Buffer Only
158-02871	CP871-OC	High Speed Tire Buffer w/ Quick Change Chuck



### LOW SPEED TIRE BUFFER KIT

- Quick change slip chuck for fast and easy change of buffing wheel • Adjustable speed regulator for precise control • Lock off throttle to prevent accidental start ups • Rear exhaust directs air away from work area • **FREE SPEED:** 2,800 RPM

Ascot No.	Mfg. No.	Description
158-00873	CP873K	Includes Over Hose
158-01873	CP873	Low Speed Tire Buffer Only





## AIR TOOL ACCESSORIES



## CORDLESS 1/2" DRIVE IMPACT WRENCH

• **4 CUSTOMIZABLE MODES:** Provides multiple fastening torque outputs designed for sedans, light trucks and box trucks • **POWERSTATE™ BRUSHLESS MOTOR:** Delivers up to 750 ft./lb. of fastening torque and 1,100 ft./lb. of nut-busting torque • **LONG MOTOR LIFE:** POWERSTATE™ Brushless Motor delivers maximum power and long motor life • **FASTER TIRE SERVICE:** Enables users to perform faster tire service by removing the hassle of pneumatic hoses, compressors, and torque sticks • **PART OF THE M18™ SYSTEM:** Featuring over 175+ Tools

## CORDLESS 1" DRIVE IMPACT WRENCH

• **POWERSTATE™ BRUSHLESS MOTOR:** Delivers up to 1,800 ft./lb. nut-busting torque, making it the world's most powerful cordless impact wrench • Up to 7 lb. lighter weight allowing for less user fatigue • **ONE-KEY™ COMPATIBLE:** Ability to customize, track and manage tools for increased productivity and investment protection • **4-MODE DRIVE CONTROL™:** Provides greater control over output speed and power • **LOWER OWNERSHIP COST:** Eliminates compressors and generators, providing greater portability and lower cost of ownership • Includes the ability to set a repeatable torque output for maximum control



Ascot No.	Mfg. No.	Description
153-76920	2769-20	Cordless 1/2" Drive Impact Wrench - 2" Extended Anvil (Bare Tool)
153-76922	2769-22	Cordless 1/2" Drive Impact Wrench - 2" Extended Anvil (Kit)

Ascot No.	Mfg. No.	Description
155-86720	2867-20	Cordless 1" Drive Impact - Standard Anvil (Bare Tool)
155-86722	2867-22	Cordless 1" Drive Impact - Standard Anvil (Kit)



## MILWAUKEE 1" DRIVE EXTENDED ANVIL D-HANDLE IMPACT WRENCH

• **POWERSTATE™ Brushless Motor** delivers up to 2,000 ft.-lbs of nut-busting torque and 1,900 ft.-lbs of fastening torque  
 • Install up to 200 1-1/4" bolts on a single HIGH OUTPUT™ HD12.0Ah battery  
 • M18™ REDLITHIUM™ Battery Packs are compatible with all M18™ tools  
 • The 4-Mode DRIVE CONTROL™ provides you with greater control over the output speed and power of the MILWAUKEE® High Torque Impact Wrench  
 • The ONE-KEY™ Technology allows you to customize, track, and manage the impact wrench with the ability to set a repeatable torque output for maximum control



Ascot No.	Mfg. No.	Description
155-86922	2869-22	1" Drive Extended Anvil D-Handle Impact Wrench - Kit  <b>Kit Includes:</b> (1) M18 FUEL™ 1" D-Handle High Torque Impact Wrench w/ ONE-KEY™ (2868-20) (2) M18 REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack (48-11-1812) (1) M18™ & M12™ Rapid Charger (48-59-1808) (1) Adjustable Handle (1) Lanyard Loop (1) Contractor Bag
155-86920	2869-20	1" Drive Extended Anvil D-Handle Impact Wrench - Bare Tool Only

## MILWAUKEE 1" DRIVE STANDARD ANVIL D-HANDLE IMPACT WRENCH

• **POWERSTATE™ Brushless Motor** delivers up to 2,000 ft.-lbs of nut-busting torque and 1,900 ft.-lbs of fastening torque  
 • Install up to 200 1-1/4" bolts on a single HIGH OUTPUT™ HD12.0Ah battery  
 • M18™ REDLITHIUM™ Battery Packs are compatible with all M18™ tools  
 • The 4-Mode DRIVE CONTROL™ provides you with greater control over the output speed and power of the MILWAUKEE® High Torque Impact Wrench  
 • The ONE-KEY™ Technology allows you to customize, track, and manage the impact wrench with the ability to set a repeatable torque output for maximum control



Ascot No.	Mfg. No.	Description
155-86822	2868-22	1" Drive Standard Anvil D-Handle Impact Wrench - Kit  <b>Kit Includes:</b> (1) M18 FUEL™ 1" D-Handle High Torque Impact Wrench w/ ONE-KEY™ (2868-20) (2) M18 REDLITHIUM™ HIGH OUTPUT™ HD12.0 Battery Pack (48-11-1812) (1) M18™ & M12™ Rapid Charger (48-59-1808) (1) Adjustable Handle (1) Lanyard Loop (1) Contractor Bag
155-86820	2868-20	1" Drive Standard Anvil D-Handle Impact Wrench - Bare Tool Only





## AIR TOOL ACCESSORIES



### 3/4" SUPER DUTY AIR IMPACT WRENCH

- Powerful 3/4" wrench
- Ideal for everything from spring work to pinion nut and track pad removal and major engine teardowns
- Combines compact size with high output
- Jumbo hammer mechanism delivers up to 1,100 ft./lbs. of torque smoothly, with less vibration

Ascot No.	Mfg. No.	Description
154-00261	IR-261	Standard Anvil
154-02613	IR-261-3	3" Extended Anvil
154-02616	IR-261-6	6" Extended Anvil

### 3/4" ULTRA DUTY AIR IMPACT WRENCH

- Offers all of the ergonomic, power and durability enhancing features as the IR-2161 but with a 6" extended anvil for those hard to reach applications
- Jumbo hammer mechanism
- Up to 1,200 ft./lbs. of torque
- Trouble-free, longer performance aided by the pressure-feed lube system
- Compact and only 7-5/8" long
- Handle exhaust

Ascot No.	Mfg. No.	Description
154-21617	IR-2161XP-6	3/4" Ultra Duty Air Impact Wrench

### 1/2" SUPER DUTY AIR IMPACT WRENCH

- Offers the sheer power and performance features to tackle the toughest of jobs
- Most popular tool in its class
- Durable and economical
- **TORQUE RANGE:** 25-350 ft./lbs.

Ascot No.	Mfg. No.	Description
153-00231	IR-231HA	Standard Anvil
153-02312	IR-231HA-2	Extended Anvil

### 1/2" ULTRA DUTY TITANIUM AIR IMPACT WRENCH

- Titanium weighs less and provides greater durability
- Enhanced Twin Hammer mechanism for fast removal of frozen bolts
- Push button forward/reverse controls for one-handed operation
- **TORQUE RANGE:** 50-600 ft./lb., 625 ft./lb. max (forward), 700 ft./lb. max (reverse)

Ascot No.	Mfg. No.	Description
153-02235	IR-2235TIMAX	Standard Anvil
153-12235	IR-2235TIMAX-2	2" Extended Anvil
153-32235	IR-2235QTIMAX	Quiet Version
153-22235	IR-2235QTIMAX-2	Quiet Version with 2" Extended Anvil



154-00261



154-21617



153-00231



153-12235



### 1" HEAVY DUTY AIR IMPACT WRENCH

- 1" drive wrench with 1,000 ft./lbs. torque to handle tough jobs in cramped spaces
- Built-in pressure-feed lube system, adjustable side handle and built-in oil reservoir that provides continuous misting of the air motor
- Available in 6" extended anvil and 6" extended #5 spline drive anvil for high production truck tire changing

Ascot No.	Mfg. No.	Description
155-00280	IR-280	Standard Anvil
155-02806	IR-280-6	6" Extended Anvil
156-28006	IR-280-S6	#5 Spline Super Duty Anvil

### 1" HEAVY DUTY AIR IMPACT WRENCH

- Perfect for the demanding world of truck tire and service work
- Combines exceptional power, durability and operator convenience
- Delivers 1450 ft./lbs. of maximum torque, with a 5000 RPM free speed and four-position power regulator 360° swivel inlet
- Available in 6" extended anvil and 6" extended #5 spline drive anvil for high production truck tire changing

Ascot No.	Mfg. No.	Description
155-28560	IR-285B	Standard Anvil
155-02856	IR-285B-6	6" Extended Anvil
156-28566	IR-285BS-6	#5 Spline Super Duty Anvil

### 1" D-HANDLE IMPACT WRENCH

- **SOLID STEEL IMPACT MECHANISM:** Deliver 2,100 ft./lb. of torque • **HIGHLY ENGINEERED DESIGN:** Delivers the power you need over the life of the tool • **STEEL CORE DESIGN:** Nothing's been proven to last longer • **CHEMICAL RESISTANT HOUSING & STEEL CORE:** Stands up to drops and harsh work environments • **LIGHTWEIGHT:** 25%

- lighter than the industry's leading 1" wrench • **360° ADJUSTABLE HANDLE:** The side handle rotates fully around the tool as the job demands • **SWIVEL HOSE CONNECTION:** Keeps cords from getting tangled so you can move freely around the garage • **6" ANVIL EXTENSION:** Increases accessibility in hard to reach places

Ascot No.	Mfg. No.	Description
155-02850	IR-2850MAX	Standard Anvil
155-28506	IR-2850MAX-6	Extended Anvil

### 1" HEAVY DUTY AIR IMPACT WRENCH

- Improved 1" drive tool perfect for truck and heavy equipment maintenance
- Offers power and convenience at an affordable price
- Compact, lightweight and perfect for working on suspension components
- **TORQUE RANGE:** 100-1000 ft./lb.

Ascot No.	Mfg. No.	Description
155-00295	IR-295	Standard Anvil
156-02951	IR-295-S	#5 Spline Drive

### HEAVY DUTY AIR LOW SPEED TIRE BUFFER

- **APPLICATIONS:** For quick work of patchwork and roughing up low areas for recapping, tire scuffing and cleaning tire moldings
- **FREE SPEED:** up to 3,000 RPM

Ascot No.	Mfg. No.	Description
157-01327	IR-327LS	Heavy Duty Air Low Speed Tire Buffer, includes Over Hose



155-00280



155-02856



155-02850



155-28506



155-00295



157-01327



## AIR TOOL ACCESSORIES



### AIR TOOL LUBRICANTS

Ascot No.	Mfg. No.	Description
181-10510	105-LBK1	4 Oz. IR 105 Grease, 4 oz. IR10 Oil & Grease Gun Head
181-10540	105-4T	(6) 4 oz. Tubes - IR 105 Grease Refills
181-11510	115-LBK1	4 oz. IR 115 Grease, 4 oz. IR10 Oil & Grease Gun Head
181-11540	115-4T	(6) 4 oz. Tubes - IR 115 Grease Refills
181-12228	R000A2-228	Grease Gun
328-10001	100-1	1 lb. Grease for Impact Wrenches



181-10510

### AIR TOOL COVERS

• Vinyl boots also absorb some of the tool vibration and protect air impact ratchets, wrenches and drills from external damage

IR Tool No.	KIT No.	Ascot No.
212	212-Boot	176-20232
211	211-P32	176-21132
231C, 231HA-2	231-Boot	176-23122
2235	2235M-Boot	176-13532
244A, 244A-2	244-Boot	176-24432
261, 261-2, 271	261-Boot	176-26132
285B-6, 285B5-6, 285B	285-Boot	176-28532
259	259-Boot	176-25925
2135QXPA, 2135QXPA-2	2135M-Boot	176-21350

### RETAINING RINGS

IR No.	Ascot No.	Description
231-425A	175-31425	Socket Retainer for IR231, 231-2
R1A-159	175-01590	Retainer O-Ring for IR 231, 231-2
291-425	175-91425	Socket Retainer for IR-281, 285
291-426	175-81426	Retainer O-Ring for IR-281, 285

### MOTOR TUNE-UP KITS

• INCLUDES: the vanes, gaskets and seals for a complete tune-up • 231-TK3 also includes ball bearings

IR No.	Kit No.	Ascot No.
212	212-TK2	176-10212
231C, 231HA-2	231-TK3	176-10221
235	235-TK3	176-12313
244A, 244A-2	244-TK2	176-10244
261, 271	261-TK2	176-10261
280 Series	280-TK2	176-10280
7803A, 7803RA	7803-TK1	176-17803
285B-6	285B-TK1	176-10285
2235TIMAX	2235-TK1	176-22235
2135QXPA, 2135QXPA-2	2135-TK2	176-32135

### IMPACT WRENCH ACCESSORIES

Ascot No.	Mfg. No.	Description
175-23142	IR 231-425	IR 1/2" Impact Wrench Retainer Clip
175-33104	231-Boot	Red Protective Boot for IR 231HA-2 Impact Wrenches
175-82651	H-082651	1" Impact Wrench Retainer Clip O-Ring
175-83071	P-083071	O-Ring for 1/2" Impact Wrench Retainer Clips



### INDUSTRIAL STRENGTH SILICONE LUBRICANT

• Teflon™ fluoropolymer enhances performance  
• Long-lasting lubrication • Won't accumulate • dust & dirt  
• QUANTITY: 12 per case



328-00016

Ascot No.	Mfg. No.	Description
328-00016	16-SL	Blaster Silicone Lubricant - 11 Oz.

### MARVEL AIR TOOL OIL

- **APPLICATIONS:** Specially formulated for use in all piston type rotary air tools and in-line air lubricators
- Assures maximum performance by dissolving gum and sludge
- Prevents rust formation while providing positive lubrication for smooth starting and longer tool life
- **QUANTITY:** 6 bottles per case

Ascot No.	Mfg. No.	Description
181-00085	MM085	Marvel Air Tool Oil, 32 Oz.

### MARVEL AIR TOOL OIL

- 12 Bottle per case
- 4 oz. bottles
- Specially formulated for use in all air tools or in-line lubricators
- Prevents rust
- Assures maximum tool performance
- Made in the U.S.A

Ascot No.	Mfg. No.	Description
181-00080	3125	Marvel Air Tool Oil 4 Oz.

181-00080  
Marvel Air Tool Oil181-00085  
Marvel Air Tool Oil

### SUPER RED PNEUMATIC AIR TOOL LUBRICANT

- **APPLICATIONS:** Dissolves gum & varnish formation
- Prevents gum & varnish formation
- Ensures smoother starts
- Special rust & oxidation inhibitor
- Clean and free running
- **QUANTITY:** 12 bottles per case

Ascot No.	Mfg. No.	Description
181-00406	0406	Super Red Pneumatic Air Tool Oil

181-00406  
Super Red Pneumatic Air Tool Lubricant

181-00404

181-01404

### B'BLASTER AIR TOOL CONDITIONER

- **APPLICATIONS:** Thoroughly cleans internal pneumatic tool parts, restoring them to peak performance and prolonging tool life • Breaks loose deposits that create friction
- and impede smooth operation
- Provides long-lasting lubrication
- Protects tools from freezing down to -25°F • **12 cans per case**

Ascot No.	Mfg. No.	Description
181-00404	16-ATL	Blaster Air Tool Conditioner - 16 Oz.
181-01404	ATC-TS	Blaster Air Tool Conditioner - 3.5 Oz. Aerosol

### B'BLASTER AIR TOOL OIL/LUBE

- **APPLICATIONS:** Provides lubrication & prolongs tool life
- Improves tool performance
- Formulated for use with in-line oilers • **12 cans per case**

Ascot No.	Mfg. No.	Description
181-00016	16-ATL	Blaster Air Tool Oil/Lube - 16 Oz.



181-00016



## IMPACT SOCKET



### IMPACT SOCKET SETS

Ascot No.	Mfg. No.	Description	Details
163-01150	1150	1/2" DR 13-Piece SAE Set	• Contains the following sizes: 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4"
163-01151	1150D	1/2" DR 13-Piece Deep Set	• Contains the following sizes: 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-1/4"
163-01152	1152M	1/2" DR 14-Piece Metric Standard Set	• Contains the following sizes: 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 21mm, 22mm, 26mm, 27mm
163-01153	1153MD	1/2" DR 14-Piece Metric Deep Set	• Contains the following sizes: 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 21mm, 22mm, 26mm, 27mm
163-02668	2668	1/2" DR Master 39-Piece SAE Impact Socket Set	• CR-MO alloy steel for long life • Fully guaranteed • Heavy duty blow mold case • 19 Standard Sockets: 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16", 1-1/4", 1-5/16", 1-3/8", 1-7/16" and 1-1/2" • 19 Deep Sockets: 3/8", 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8", 1-3/16", 1-1/4", 1-5/16", 1-3/8", 1-7/16" and 1-1/2" Universal
163-02669	2669	1/2" DR Master 39-Piece Metric Impact Socket Set	• CR-MO alloy steel for long life • Fully guaranteed • Heavy duty blow mold case • 19 Standard Sockets: 9mm, 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 20mm, 21mm, 22mm, 23mm, 24mm, 26mm, 27mm and 30mm • 19 Deep Sockets: 9mm, 10mm, 11mm, 12mm, 13mm, 14mm, 15mm, 16mm, 17mm, 18mm, 19mm, 20mm, 21mm, 22mm, 23mm, 24mm, 26mm, 27mm and 30mm Universal Joint
163-05153	1153DD	1/2" DR 29-Piece Metric and SAE 6-Point Deep Impact Socket Set	• Contains the following sizes: 7/16", 1/2", 9/16", 5/8", 11/16", 3/4", 13/16", 7/8", 15/16", 1", 1-1/16", 1-1/8" and 1-1/4" deep sockets • 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 21, 22, 26 and 27mm deep sockets • 3/4" x 13/16" deep and 19mm x 21mm deep flip sockets
163-22219	122019K2	1/2" Dr. 4-Piece Flank Bite Damaged Nut Remover Socket Set	• New Flank Bite design works on up to an industry leading 90% rounded lug nut • Also safe for forward tightening of lug nuts without damage • Contains the following sizes: 17mm, 19mm, 21mm, 22mm • Individual sockets also available separately: 17mm (163-22017), 19mm (163-22019), 21mm (163-22021), 22mm (163-22022)
164-02110	2110	3/4" DR 10-Piece Truck Set	• Contains the following sizes: 13/16" Square Socket, 1-1/16", 1-1/8", 1-1/4" Thin Wall Deep Sockets, 1-1/2" Budd Wheel Socket, 17mm & 21mm Square Socket, 35mm, 35mm & 41mm Deep Sockets
164-02181	2181D	3/4" DR 8-Piece SAE Deep Set	• Contains the following sizes: 1", 1-1/16", 1-1/8", 1-1/4", 1-5/16", 1-3/8", 1-3/16", 1-1/2"
165-03110	3110	1" DR 10-Piece Truck Set	• Contains the following sizes: 13/16" square, 1-1/16", 1-1/8", 1-1/4" thin wall deep, 1-1/2" deep with inside lip, 17mm & 21mm square with inside lip, 35mm, 35mm & 41mm deep



### IMPACT SOCKET SETS (CONT.)

Ascot No.	Mfg. No.	Description	Details
165-03119	3119	1" DR 9-Piece Large Truck Socket Set	• Contains the following sizes: 13/16" & 15/16" square, 33mm, 1-1/2", 1-5/8", 1-3/4", 1-7/8", 2" & 2-1/2" deep sockets
165-03190	3190	1" DR 9-Piece SAE Truck Set	• Contains the following sizes: 13/16", 4 points budd wheel standard length, 7/8", 15/16", 1", 1-3/16", 1-1/2" deep with inside lip, 1-1/16", 1-1/8", 1-1/4" thin wall deep
165-03197	3197M	1" DR 7-Piece Metric Truck Set	• Contains the following sizes: 17mm, 21mm, 4 pts. budd wheel standard length, 27mm, 35mm, 36mm, 40mm deep
165-05626	5626	1" DR 5-Piece Budd Wheel Socket Set	• Contains the following sizes: 1-1/2" hex x 15/16" square budd wheel impact socket, 35mm x 17mm square budd wheel impact socket, 38mm x 20mm square budd wheel impact socket, 40mm x 21mm square budd wheel impact socket and 35mm deep
166-04191	4191	85 Spine DR 9-Piece SAE Truck Set	• Contains the following sizes: 13/16", 4 points budd wheel standard length, 7/8", 15/16", 1", 1-3/16", 1-1/2" deep with inside lip, 1-1/16", 1-1/8", 1-1/4" thin wall deep
167-12030	1203D	1/2" Drive 3-Piece Flip Impact Socket Set	• CR-MO steel for long life • Fully guaranteed • Heavy duty blow mold case • Contains the following sizes: 3/4" x 13/16" - 124601, 19mm x 21mm - 1291DT
167-12050	1205D	1/2" Drive 5-Piece Deep Thin Wall Flip Set	• Contains the following sizes: 3/4" x 13/16", 19mm x 21mm, 7/8" x 15/16", 17mm x 19mm, 3" extension
167-12051	000524	1/2" Drive 5-Piece 1/2 Size Flip Socket Set	• Made from durable chromoly steel • Coated with a rust and corrosion resistant black oxide finish • Contains the following sizes: 18.5mm x 19.5mm, 21mm x 21.5mm, 23.5mm x 22.5mm, 22mm x 22.5mm, Extractor punch • Individual sockets also available separately
169-01234	1234A	4-Piece Impact Adapter Socket Set	• CR-MO steel for long life • Heavy duty blow molded case • Contains the following: 1/2" (F) x 3/4" (M) adapter, 3/4" (F) x 1" (M) adapter, 3/4" (F) x 1/2" (M) adapter, 1" (F) x 3/4" (M) adapter
492-00502	1555	5-Piece 1/2" Drive Twist Socket Set	• Designed to easily remove damaged, rounded nuts • Use with 1/2" drive impact wrench or breaker bar • CR-MO steel for long life • Heavy duty blow molded case • INCLUDES: 17mm, 19mm, 21mm & 22mm twist sockets plus a 50mm extractor punch



402-01283

492-00502

167-12051

165-03197

## IMPACT SOCKETS



Ascot No.	Mfg. No.	Description
<b>METRIC</b>		
163-10130	1013M	1/2" Drive x 13mm Std.
163-10142	1014M	1/2" Drive x 14mm Std.
163-10162	1016M	1/2" Drive x 16mm Std.
163-10170	1017M	1/2" Drive x 17mm Std.
163-10182	1018M	1/2" Drive x 18mm Std.
163-10190	1019M	1/2" Drive x 19mm Std.
163-10210	1021M	1/2" Drive x 21mm Std.
163-10221	1022M	1/2" Drive x 22mm Std.
163-10270	1027M	1/2" Drive x 27mm Std.
<b>SAE</b>		
163-10180	1018	1/2" Drive x 9/16" Std.
163-10200	1020	1/2" Drive x 5/8" Std.
163-10220	1022	1/2" Drive x 11/16" Std.
163-10240	1024	1/2" Drive x 3/4" Std.
163-10280	1028	1/2" Drive x 7/8" Std.
163-01030	1030	1/2" Drive x 15/16" Std.
163-10360	1036	1/2" Drive x 1-1/8" Std.

Ascot No.	Mfg. No.	Description
<b>METRIC</b>		
163-10172	1017MEDT	1/2" Drive x 17mm Extra Thin Wall
163-10174	1017MEDTM	1/2" Drive x 17mm Extra Thin Wall Mercedes
163-10183	1018MEDT	1/2" Drive x 18mm Extra Thin Wall
163-10191	1019MEDT	1/2" Drive x 19mm Extra Thin Wall
163-10211	1021MEDT	1/2" Drive x 21mm Extra Thin Wall
163-10223	1022MEDT	1/2" Drive x 22mm Extra Thin Wall
163-10230	1023MEDT	1/2" Drive x 23mm Extra Thin Wall
<b>SAE</b>		
163-10241	1024EDT	1/2" Drive x 3/4" Extra Thin Wall
163-10261	1026EDT	1/2" Drive x 13/16" Extra Thin Wall
163-10282	1028EDT	1/2" Drive x 7/8" Extra Thin Wall

Ascot No.	Mfg. No.	Description
<b>METRIC</b>		
167-12110	1211D	1/2" Dr. x 11mm x 12mm Chrome Deep Flip
167-12179	1217DT	1/2" Dr. x 17mm x 19mm Deep Thin Flip
167-12910	1291	1/2" Dr. x 19mm x 21mm Std. Flip
167-12911	1291D	1/2" Dr. x 19mm x 21mm Deep Flip
167-12912	1291DT	1/2" Dr. x 19mm x 21mm Deep Extra Thin Flip
167-18195	1A7535	1/2" Dr. x 18.5mm x 19.5mm Deep Flip
167-21215	1A7538	1/2" Dr. x 21mm x 21.5mm Deep Flip
167-21225	1A7542	1/2" Dr. x 21.5mm x 22.5mm Deep Flip
167-22225	1A7540	1/2" Dr. x 22mm x 22.5mm Deep Flip
<b>SAE</b>		
167-12460	1246D	1/2" Dr. x 3/4" x 13/16" Deep Flip
167-12461	1246DT	1/2" Dr. x 3/4" x 13/16" Deep Extra Thin Flip
167-12490	1249D	1/2" Dr. x 7/8" x 15/16" Deep Flip

### INDIVIDUAL IMPACT SOCKETS

- CR-MO alloy steel for long life • Radius corner design assists socket in grabbing the flat side of the fastener • Standard and deep lengths available

Ascot No.	Mfg. No.	Description
<b>METRIC</b>		
163-10111	1011MD	1/2" Dr. x 11mm Deep Impact Socket
163-10131	1013MD	1/2" Drive x 13mm Deep
163-10143	1014MD	1/2" Drive x 14mm Deep
163-10171	1017MD	1/2" Drive x 17mm Deep
163-10181	1018MD	1/2" Drive x 18mm Deep
163-10191	1019MD	1/2" Drive x 19mm Deep
163-10211	1021MD	1/2" Drive x 21mm Deep
163-10222	1022MD	1/2" Drive x 22mm Deep
163-10271	1027MD	1/2" Drive x 27mm Deep
163-10283	1028MD	1/2" Drive x 28mm Deep
163-10332	1032MD	1/2" Drive x 32mm Deep
163-10333	1033MD	1/2" Drive x 33mm Deep
<b>SAE</b>		
163-10161	1016D	1/2" Drive x 1/2" Deep
163-10201	1020D	1/2" Drive x 5/8" Deep
163-10222	1022D	1/2" Drive x 11/16" Deep
163-10242	1024D	1/2" Drive x 3/4" Deep
163-10262	1026D	1/2" Drive x 13/16" Deep
163-10281	1028D	1/2" Drive x 7/8" Deep
163-10300	1030D	1/2" Drive x 15/16" Deep
163-10320	1032D	1/2" Drive x 1" Deep
163-10342	1034D	1/2" Drive x 1-1/16" Deep
163-10362	1036D	1/2" Drive x 1-1/8" Deep
163-10401	1040D	1/2" Drive x 1-1/4" Deep
163-10482	1048D	1/2" Drive x 1-1/2" Deep
163-15260	1526SD	1/2" Drive x 13/16" Square 8-Point

Ascot No.	Mfg. No.	Description
164-02017	2017MS	3/4" Drive x 17mm Square
164-02021	2021MS	3/4" Drive x 21mm Square
164-02024	2024D	3/4" Drive x 3/4" Deep
164-02026	2026S	3/4" Drive x 13/16" Square
164-02030	2030	3/4" Drive x 15/16" Std.
164-02033	2033MD	3/4" Drive x 33mm Deep
164-02034	2034DT	3/4" Drive x 1-1/16" Deep Thin Wall

### INDIVIDUAL IMPACT SOCKETS

- CR-MO alloy steel for long life • Radius corner design assists socket in grabbing the flat side of the fastener • Standard and deep lengths available

Ascot No.	Mfg. No.	Description
<b>METRIC</b>		
164-20301	2030M	3/4" Drive x 30mm Std.
164-20330	2033M	3/4" Drive x 33mm Std.
<b>SAE</b>		
164-20401	2040D	3/4" Drive x 1-1/4" Deep
164-02038	2038D	3/4" Drive x 1-3/16" Deep
164-02042	2042D	3/4" Drive x 1-5/16" Deep
164-02046	2046D	3/4" Drive x 1-7/16" Deep
164-20480	2048	3/4" Drive x 1-1/2" Std.
164-20481	2048D	3/4" Drive x 1-1/2" Deep
164-02056	2056D	3/4" Drive x 1-3/4" Deep
164-02323	2323C	3/4" Drive x 1-1/2" Hex x 13/16" Square

Ascot No.	Mfg. No.	Description
<b>SAE</b>		
165-03026	3026S	1" Drive x 13/16" Square
165-03030	3030S	1" Drive x 15/16" Square
165-03034	3034DT	1" Drive x 1-1/16" Thin Wall Deep
165-03042	3042D	1" Drive x 1-5/16" Deep
165-03046	3046D	1" Drive x 1-7/16" Deep
165-03052	3052D	1" Drive x 1-5/8" Deep
165-03054	3054D	1" Drive x 1-11/16" Deep
165-03056	3056D	1" Drive x 1-3/4" Deep
165-03060	3060D	1" Drive x 1-7/8" Deep
165-03323	3323C	1" Drive 1-1/2" Hex x 13/16" Square
165-30300	3030	1" Drive x 15/16" Std.
165-30301	3030D	1" Drive x 15/16" Deep
165-30361	3036D	1" Drive x 1-1/8" Deep
165-30362	3036DT	1" Drive x 1-1/8" Deep Thin Wall
165-30380	3038D	1" Drive x 1-3/16" Deep
165-30401	3040D	1" Drive x 1-1/4" Deep
165-30402	3040DT	1" Drive x 1-1/4" Deep Thin Wall
165-30420	3042DT	1" Drive x 1-5/16" Deep Thin Wall
165-30481	3048D	1" Drive x 1-1/2" Deep w/ Inside Lip
165-30482	3048DR	1" Drive x 1-1/2" Deep - Standard

Ascot No.	Mfg. No.	Description
<b>METRIC</b>		
165-03017	3017MS	1" Drive x 17mm Square
165-03019	3019MS	1" Drive x 19mm Square
165-03021	3021MS	1" Drive x 21mm Square
165-30302	3030MD	1" Drive x 30mm Deep
165-03033	3033MD	1" Drive x 33mm Deep
165-03035	3035MD	1" Drive x 35mm Deep
165-30381	3038MD	1" Drive x 38mm Deep
165-30410	3041MDT	1" Drive x 41mm Deep Thin Wall
165-03041	3041MD	1" Drive x 41mm Deep
165-03321	3321NC	1" Drive 41mm x 21mm Square

Ascot No.	Mfg. No.	Description
<b>METRIC</b>		
166-04033	4033MD	#5 Spline x 33mm Deep
166-04035	4035MDT	#5 Spline x 35mm Deep Thin Wall
166-04041	4041MDT	#5 Spline x 41mm Deep Thin Wall
<b>SAE</b>		
166-04026	4026S	#5 Spline x 13/16" Square
166-04034	4034DT	#5 Spline x 1-1/16" Deep Thin Wall
166-04038	4038	#5 Spline x 1-3/16" Std.
166-04040	4040DT	#5 Spline x 1-1/4" Deep Thin Wall
166-04042	4042DT	#5 Spline x 1-5/16" Deep Thin Wall
166-04048	4048D	#5 Spline x 1-1/2" Deep w/Inside Lip
166-40480	4048DT	#5 Spline x 1-1/2" Deep Thin Wall
166-04323	4323C	#5 Spline x 13/16" Square x 1-1/2" Hex

Ascot No.	Mfg. No.	Description
169-01003	1003SE	1/2" Drive x 3" Extension
169-01005	1005SE	1/2" Drive x 5" Extension
169-01020	1020A	1/2" Drive Female x 3/4" Male Adapt.
169-02006	2006E	3/4" Drive x 6" Extension
169-02010	2010A	3/4" Drive Female x 1/2" Male Adapt.
169-02030	2030A	3/4" Drive Female x 1" Male Adapt.
169-20100	2010E	3/4" Drive x 10" Extension
169-02013	2013E	3/4" Drive x 13" Extension
169-03006	3006E	1" Drive x 6" Extension
169-03010	3010E	1" Drive x 10" Extension
169-03013	3013E	1" Drive x 13" Extension
169-03020	3020A	1" Drive Female x 3/4" Male Adapt.
169-04010	4010A	#5 Spline Female x 3/4" Male Adapt.
169-04020	4020A	#5 Spline Female x 1" Male Adapt.
169-01002	1002E	1/4" Drive x 2" Chrome Extension



## TORQUE WRENCHES & TORQUE ACCESSORIES



Heavy Duty Truck Torque Extensions

168-00475  
3/4" Drive 33mm  
Torque Socket
**NEW**


### HEAVY DUTY TRUCK TORQUE EXTENSIONS

- Heavy duty truck extensions can convert sockets into Torque Sockets
- Available in 3/4" and 1" drives

Ascot No.	Mfg. No.	Description
495-16000	LT1600M	3/4" Dr. Truck Torque Extension - 475 ft./lb.
495-16001	LT1600N	3/4" Dr. Truck Torque Extension - 250 ft./lb.
495-16002	LT1600Q	3/4" Dr. Truck Torque Extension - 175 ft./lb.
495-16003	LT1600U	3/4" Dr. Truck Torque Extension - 350 ft./lb.
495-16014	LT1600P	1" Drive Truck Torque Extension - 475 ft./lb.
495-16015	LT1600R	1" Drive Truck Torque Extension - 250 ft./lb.
495-16016	LT1600S	1" Drive Truck Torque Extension - 350 ft./lb.
495-16017	LT1600T	1" Drive Truck Torque Extension - 175 ft./lb.

### 3/4" DRIVE 33MM TORQUE SOCKET

- Brown Torq stick
- 3/4 in. drive torque socket hex 33mm
- 475 ft./lbs.
- Solid one-piece construction
- Covered by a **lifetime warranty**

Ascot No.	Mfg. No.	Description
168-00475	334030L7	3/4" Drive 33mm Torque Socket Hex 475ft/lb Brown

### 3/4" X 1" X 13" TORQUE WRENCH EXTENSION

Ascot No.	Mfg. No.	Description
169-13413	13413E	3/4" Dr. x 1" Dr. x 13" Impact Extension
168-12997	12297	3/4" Drive Block for Flex Hinge Torque Wrench
168-12999	12299	1" Drive Block for Flex Hinge Torque Wrench

### TORQUE FIN TORQUE WRENCH STABILIZER

- Links with, stabilizes, and properly aligns manual torque wrenches to ensure accurate torque
- Saves time and money
- Easy to use
- Reduces risk of injury and liability due to wheel-off accidents
- Works with most commercial torque wrenches and truck tires
- Durable and lightweight

Ascot No.	Mfg. No.	Description
168-67250	67250	Torque Fin Torque Wrench Stabilizer

### PRESET VALVE NUT TORQUE WRENCHES

- Wrench flexes when proper torque setting is reached
- Prevents overtightening of the valve grommet
- Cushioned handle
- Sizes and preset torque settings laser etched on shaft
- +/- 4% accuracy

Ascot No.	Mfg. No.	Description
168-00058	NSPTW58	5/8" Preset Torque Wrench for TR540-550 Series Valve Hex Nuts
168-00916	NSPTW916	9/16" Preset Torque Wrench for TR570 Series Valve Hex Nuts

169-13413  
3/4" x 1" x 13"  
Torque Wrench  
Extension

168-60020

168-60025



168-67250

**DURABLE  
AND  
LIGHT IN  
WEIGHT**


168-00916

168-00058

**NEW**
[www.ascotsupply.com](http://www.ascotsupply.com)
**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## PRECISION INSTRUMENTS

### SPLIT-BEAM CLICK TORQUE WRENCHES

- **EXTREMELY ACCURATE:** within 4% of reading from 20% of full scale to full scale
- Setting torque on adjustable wrenches is fast and easy because there is no spring tension on the adjustment knob
- Torque setting locks on adjustable wrenches for repetitive applications
- Wrench length designed to provide the leverage required for maximum torque applications. Also provides the needed reach for those hard to get at places

**EXTREMELY  
ACCURATE**

Ascot No.	Mfg. No.	Description	ft./lb.
168-02100	C2FR100F	3/8" Drive	100
168-03250	C3FR250F	1/2" Drive	250
168-03251	CP3FR250F	1/2" Preset	250
168-04400	C4D600F	3/4" Drive	600
168-05600	C5D600F	1" Drive	600

**Central TOOLS, Inc.**  
QUALITY AND INNOVATION SINCE 1908

### MICROMETER TORQUE WRENCH

- Range is 25 to 250 ft./lb.
- **HEAVY DUTY RATCHET:** Fewer and stronger teeth
- **UNIDIRECTIONAL TORQUEING:** Tightens in right hand direction only, does not tighten in left hand direction for improved performance
- **ERGONOMICALLY DESIGNED HANDLE:** MADE FROM MODIFIED SILICONE: Tear resistant, oil and solvent resistant
- Protective head cover made from modified silicone
- Comes in plastic storage case
- **MADE IN USA**

Ascot No.	Mfg. No.	Description
168-97354	97354A	Micrometer Torque Wrench: 25-250 ft./lb.

### MICROMETER TORQUE WRENCHES

- Push-through ratchet instead of a reversible ratchet
- Asymmetric design of clicker and ratchet mechanism creates a more robust construction and durable wrench
- Improved lock collar design is easier to grip
- **ACCURACY:** +/- 4% in both directions and improves impact resistance
- **MADE IN USA**

Ascot No.	Mfg. No.	Range (Increment)	Drive
495-97353	CEN97353A	30-250 ft./lb.	1/2" push-through drive
495-97355	CEN97355A	100-600 ft./lb.	3/4" push-through drive
495-97362	CEN97362	30-150 ft./lb.	1/2" flex head push-through drive
495-97352	CEN97352A	20-100 ft./lb.	3/8" flex head push-through drive
495-97351	CEN97351A	20-250 in./lb.	3/8" push-through drive
495-97361	CEN97361B	20-200 in./lb.	1/4" push-through drive



168-03250



168-97354



495-97353

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

[www.ascotsupply.com](http://www.ascotsupply.com)



## TORQUE WRENCHES & TORQUE ACCESSORIES

### MICRO-ADJUSTABLE TORQUE WRENCH

- Dual scale, calibrated dual direction
- Positive lock with spring loaded pull down lock ring
- Fast, accurate and easy to set
- Easy-to-read Laser marked scale
- Ergonomic comfort-grip
- Most feature Quick Release buttons

which provide good socket retention as well as easy socket removal

- **RANGE:** 50-250 ft./lb.
- **ACCURACY:**  $\pm 4\%$  clockwise  $\pm 6\%$  CCW of indicated value, CW, from 20% to 100% of full scale

Ascot No.	Mfg. No.	Description
168-12250	2503MFRRH	1/2" Drive Micro-Adjustable Torque Wrench

### FLEX HINGE STYLE TORQUE WRENCH

- Robust construction
- **ACCURATE RESULTS:**  $\pm 4\%$
- Adjustable torque settings
- **DUAL SCALED:** ft./lb. and NM
- The large break angle improves accuracy by reducing the possibility of over torquing

- Cam control of the mechanism gives a controlled break
- Every wrench supplied with a calibration certificate
- Durable storage case
- 2 adapters included: 3/4" to 1", 3/4" to 3/4"



168-60012  
in case

Ascot No.	Mfg. No.	Description
168-60011	60011	600 ft./lb. Flex Hinge Style Torque Wrench
168-60012	60012	2-Piece 600 ft./lb. Flex Hinge Style Torque Wrench

### 1" DR. 475 FT/LB PRESET TORQUE WRENCH

- 24 Teeth • Torque Accuracy is  $\pm 4\%$  • Industrial application with durability Ideal for heavy duty area. • Can be split and packed in two parts for a smaller, easier to transport package • Lockable Blow Molded Case

Ascot No.	Mfg. No.	Description
168-47501	1-475	1" Dr. 475 Ft/Lb Preset Torque Wrench



168-47501  
in Case

### 5-IN-1 INTERCHANGEABLE PRESET TORQUE WRENCH 1/2" DRIVE

- Single direction • Torque preset: 80, 100, 120, 140 to 160 Ft-Lb • Product in matte Finish • Protective cover for the ratcheting head • Angled head attachment • Tolerance of torque  $\pm 4\%$

Ascot No.	Mfg. No.	Description
168-80246	NS-5IPTW	5-In 1 Interchangeable Preset Torque Wrench 1/2" Drive

168-80246  
5-In 1 1/2" Drive Preset Torque Wrench



**NEW**

168-60012  
2-Pc. 600 ft./lb. Flex Hinge Style Torque Wrench

**NEW**

168-47501  
1" Drive Preset Torque Wrench

PRESET FOR EASE OF USE

**NEW**

168-80246  
5-In 1 1/2" Drive Preset Torque Wrench




117-58625

DURABLE AND PORTABLE



168-67505

1" DRIVE TRUCK TORQUE EXTENSIONS



A B C D E F

### FRL UNIT FOR BLUE TORK

- INCLUDES: Industrial grade filter; Regulator; Single point lubricator; 25' hose with capillary tube; 1 Quart of special tool oil approved for the Blue Tork

Ascot No.	Mfg. No.	Description
117-58625	586-254-1000	FRL Unit for Blue Tork



### TORQIT BATTERY-POWERED TORQUE WRENCH

- **Durable and Portable Precision Torque** • Four models from 120 ft./lb. to 3,000 ft./lb. • **LITHIUM ION 8.0 AH RECHARGEABLE BATTERY:** Full charge in under 60 minutes • Every Unit Calibrated in ISO17025 Laboratory
- 13-Month Warranty from date of purchase • **MADE IN THE USA**

Ascot No.	Mfg. No.	Description
168-67505	67505	Torqit Battery-Powered Torque Wrench

### HEAVY DUTY TRUCK TORQUE EXTENSIONS

- Heavy duty truck extensions can convert sockets into Torque Sockets
- Available in 3/4" and 1" drives

Ascot No.	Item	Mfg. No.	Description
495-16004	A	1600-P	1" Drive 475 ft./lbs. Torque Limiting Extension
495-16005	B	1600-R	1" Drive 250 ft./lbs. Torque Limiting Extension
495-16006	C	1600-S	1" Drive 350 ft./lbs. Torque Limiting Extension
495-16007	D	1600-T	1" Drive 175 ft./lbs. Torque Limiting Extension
495-16008	E	1600-W	1" Drive 650 ft./lbs. Torque Limiting Extension
495-16009	F	1600-Y	1" Drive 550 ft./lbs. Torque Limiting Extension

### MEDIUM/HEAVY DUTY TORQUE SOCKETS

- **Sockets properly torque wheel nuts to exact factory specs** • Prevents warping of rotors, which causes brake pulsation • Eliminates broken studs and nuts • Avoids damage to aluminum alloy wheels • Stops customer complaints about over-tightened lug nuts • Strobe marks stop turning at the CORRECT torque • Includes heavy duty case

Ascot No.	Mfg. No.	Description
495-30400	KT130400A	4-Piece Heavy Duty Truck Torque Socket Set. <b>SET INCLUDES:</b> HD Red, HD Brown, HD Black and HD Yellow
495-30940	KT130940	4-Piece 1" Drive Truck Torque Socket Set. <b>SET INCLUDES:</b> 1-1/4" 1" Drive Torque Hex 250 ft./lb. Red, 33mm 1" Drive Torque Hex 475 ft./lb. Brown, 1-1/2" 1" Drive Torque Hex 475 ft./lb. Black; 13/16" 1" Drive Torque Sq. 475 ft./lb. Yellow

### MEDIUM/HEAVY DUTY TORQUE SOCKETS: KIT CONTENTS

Ascot No.	Mfg. No.	Desc.	Drive	Size	Torque	Other
495-30908	KT130908A	HD Red	1"	1-1/4"	250 ft./lb.	
495-30909	KT130909A	HD Brown	1"	33mm	475 ft./lb.	
495-30910	KT130910A	HD Black	1"	1-1/2"	475 ft./lb.	
495-30911	KT130911A	HD Yellow	1"	13/16"	475 ft./lb.	
495-30913	KT130913A	HD Grey	1"	33mm	550 ft./lb.	
495-30914	KT130914A	HD Grey	1"	33mm	550 ft./lb.	Extended
495-30918	KT130918A	HD Red	3/4"	1-1/4"	250 ft./lb.	
495-30919	KT130919A	HD Brown	3/4"	33mm	475 ft./lb.	

PROPERLY TORQUES WHEEL NUTS



495-30400



## TORQUE WRENCHES & TORQUE ACCESSORIES



168-43237  
Norbar Torque  
Wrench Checker

### NORBAR 750 FT./LBS TORQUE WRENCH CHECKER

The 43237 Torque Wrench Checker is an accurate and simple to operate torque wrench checker. There is only one button; used to zero the unit prior to measurement.

- Accurate and Durable
- Easily portable or can be fixed and mounted
- No special skills required to use
- Can be provided with options
- **APPLICATION:** For use with click or break style, or dial torque wrenches

Ascot No.	Mfg. No.	Description
168-43237	43237	Norbar 750 ft./lbs Torque Wrench Checker



168-18141  
Pneumatic Torque  
Multiplier

### PNEUMATIC TORQUE MULTIPLIER

- **OPERATING RANGE:** 147 to 738 ft./Lbs. (200 to 1000 Nm)
- 'Soft Start' trigger control aids socket location, and allows gradual and safe reaction location
- Extended reaction is ideal for reaching recessed nuts
- **FAST:** 1000 Nm version has a free speed of 140 rpm for rapid bolt run-down
- **NON IMPACTING:** low vibration levels make these tools comfortable and safe to use
- **QUIET:** less than 85 dB(A) when under load
- For safety, gearbox can rotate independently from the handle so that reaction forces are not transmitted back to the operator
- Light weight for ease of handling
- On Bi-Directional tools, the direction control knob is locked while the tool is running to prevent accidental damage to the gearbox
- Square drive is quickly and easily replaceable

Ascot No.	Mfg. No.	Description
168-18141	PTME-72-2000-B	1" Square Drive Bi-Directional Pneumatic Multiplier



168-42760

### INDUSTRIAL TORQUE WRENCH

- **Norbar's New Industrial Torque Wrench**
- **Split design:** Allows for easy, behind-the-seat storage in service vehicles
- **Smaller carrying case:** Easy to transport, and less expensive to ship back-and-forth for calibration and service
- Removal of calibrated nuts means less expensive to calibrate
- Adjusting scale in the handle
- is large and easy to read
- Calibration is as easy as replacing the paper scale with a new paper scale
- Ratchets are no longer a welded component, making them replaceable when worn or damaged - this means fewer wrenches scrapped
- Operator handle designed to 'guide' the technicians hand into the proper position

Ascot No.	Mfg. No.	Description
168-42760	120110	4AR-N, 3/4" Drive, 150-600 ft./lb. Range
168-42761	120110.01	4AR-N, 1" Drive, 150-600 ft./lb. Range
168-57600	120115	5R-N, 3/4" Drive, 200-750 ft./lb. Range
168-57601	120115.01	5R-N, 1" Drive, 200-750 ft./lb. Range

FOR  
INDUSTRIAL  
USE

SPLIT  
DESIGN



## LOOSE NUT PREVENTION



### CHECKPOINT LOOSE LUG NUT INDICATORS\*

- A simple and cost-effective solution that helps prevent a catastrophic loss caused by loose lug nuts when used as part of a total torque program
- When fitted on properly torqued lug nuts and inspected by a driver or technician, CHECKPOINT clearly and visually indicate if the wheel nuts have moved
- If the arrows have moved from the point-to-point or daisy-chain

pattern, this indicates that they have loosened and need attention

- Facilitates the driver's check for lug nut movement
- Early warning for mechanic or driver of excessive heat caused by possible brake or bearing problems; designed to melt in excessive heat
- Demonstrates fleet's commitment to vehicle road worthiness and safety to the public



The  
**CHECKPOINT**  
Loose Lug  
Nut  
Indicators  
in use.

SIMPLE &  
EASY TO  
USE

2X THE  
TEETH

CHECKPOINT  
Loose Lug Nut  
Indicators

### CHECKPOINT LOOSE LUT NUT INDICATORS\*

- A simple and cost effective product that can help guard against a potential catastrophic loss caused by loose lug nuts when used as part of a total torque wheel program
- When fitted on properly torqued lug nuts and inspected by a driver or technician, the CHECKPOINTS clearly and visually indicate if the lug nuts have moved
- If the arrows have moved from the point-to-point pattern, this indicates that they have loosened and need attention
- Enhanced fleet safety management
- Facilitates the driver's check for lug nut movement and involvement with vehicle safety
- Early warning for mechanic or driver of excessive heat caused by possible brake or bearing problems
- Demonstrate your fleet commitment to vehicle road worthiness and safety
- **QUANTITY:** 100 per bag



402-20021

402-20033

402-20333

\*The use of CHECKPOINT Loose Lug Nut Indicators does not guarantee wheel-offs will not occur.

Ascot No.	Mfg. No.	Description
-----------	----------	-------------

#### CHECKPOINT

402-20017	CPY17MM	CHECKPOINT 17mm Fluorescent Yellow Loose Lug Nut Indicator
402-20018	CPY18MM	CHECKPOINT 18mm Fluorescent Yellow Loose Lug Nut Indicator
402-20019	CPY19MM	CHECKPOINT 19mm Fluorescent Yellow Loose Lug Nut Indicator
402-20020	CPY20MM	CHECKPOINT 20mm Fluorescent Yellow Loose Lug Nut Indicator
402-20021	CPY21MM	CHECKPOINT 21mm Fluorescent Yellow Loose Lug Nut Indicator
402-20078	CPY22MM	CHECKPOINT 22mm (7/8") Fluorescent Yellow Loose Lug Nut Indicator
402-20023	CPY23MM	CHECKPOINT 23mm Fluorescent Yellow Loose Lug Nut Indicator
402-20024	CPY24MM	CHECKPOINT 24mm Fluorescent Yellow Loose Lug Nut Indicator
402-20001	CPY25MM	CHECKPOINT 25mm (1") Fluorescent Yellow Loose Lug Nut Indicator
402-20026	CPY26MM	CHECKPOINT 26mm Fluorescent Yellow Loose Lug Nut Indicator
402-20027	CPY27MM	CHECKPOINT 27mm Fluorescent Yellow Loose Lug Nut Indicator
402-20028	CPY28MM	CHECKPOINT 28mm Fluorescent Yellow Loose Lug Nut Indicator
402-20029	CPY29MM	CHECKPOINT 29mm Fluorescent Yellow Loose Lug Nut Indicator
402-20030	CPY30MM	CHECKPOINT 30mm Fluorescent Yellow Loose Lug Nut Indicator
402-20114	CPY31MM	CHECKPOINT 31mm (1-1/4") Fluorescent Yellow Loose Lug Nut Indicator
402-20032	CPY32MM	CHECKPOINT 32mm Fluorescent Yellow Loose Lug Nut Indicator
402-20033	CPY33MM	CHECKPOINT 33mm Fluorescent Yellow Loose Lug Nut Indicator
402-20034	CPY34MM	CHECKPOINT 34mm Fluorescent Yellow Loose Lug Nut Indicator
402-20035	CPY35MM	CHECKPOINT 35mm Fluorescent Yellow Loose Lug Nut Indicator
402-20036	CPY36MM	CHECKPOINT 36mm Fluorescent Yellow Loose Lug Nut Indicator
402-20015	CPY38MM	CHECKPOINT 38mm (1-1/2") Fluorescent Yellow Loose Lug Nut Indicator
402-20040	CPY40MM	CHECKPOINT 40mm Fluorescent Yellow Loose Lug Nut Indicator
402-20041	CPY41MM	CHECKPOINT 41mm Fluorescent Yellow Loose Lug Nut Indicator
402-20044	CPY44MM	CHECKPOINT 44mm Fluorescent Yellow Loose Lug Nut Indicator
402-20046	CPY46MM	CHECKPOINT 46mm Fluorescent Yellow Loose Lug Nut Indicator

Ascot No.	Mfg. No.	Description
402-20021	CPY21MM	CHECKPOINT 21mm Fluorescent Yellow Loose Lug Nut Indicators
402-20033	CPY33MM	CHECKPOINT 33mm Fluorescent Yellow Loose Lug Nut Indicator
402-20333	CPY33MM	CHECKTORQUE 33mm Red Loose Lug Nut Indicator (Re-torque after first 100 Miles)




## LOOSE NUT PREVENTION



Ascot No.	Mfg. No.	Description
<b>CHECKPOINT HI-TEMP</b>		
402-21019	CPOHY19MM	CHECKPOINT 19mm Orange Hi-Temp Loose Lug Nut Indicator
402-21021	CPOHY21MM	CHECKPOINT 21mm Orange Hi-Temp Loose Lug Nut Indicator
402-21022	CPOHY22MM	CHECKPOINT 22mm Orange Hi-Temp Loose Lug Nut Indicator
402-21030	CPOHY30MM	CHECKPOINT 30mm Orange Hi-Temp Loose Lug Nut Indicator
402-21031	CPOHY31MM	CHECKPOINT 31mm Orange Hi-Temp Loose Lug Nut Indicator
402-21032	CPOHY32MM	CHECKPOINT 32mm Orange Hi-Temp Loose Lug Nut Indicator
402-21033	CPOHY33MM	CHECKPOINT 33mm Orange Hi-Temp Loose Lug Nut Indicator
402-21036	CPOHY36MM	CHECKPOINT 36mm Orange Hi-Temp Loose Lug Nut Indicator
402-21038	CPOHY38MM	CHECKPOINT 38mm Orange Hi-Temp Loose Lug Nut Indicator
402-21040	CPOHY40MM	CHECKPOINT 40mm Orange Hi-Temp Loose Lug Nut Indicator
402-21041	CPOHY41MM	CHECKPOINT 41mm Orange Hi-Temp Loose Lug Nut Indicator
402-21044	CPOHY44MM	CHECKPOINT 44mm Orange Hi-Temp Loose Lug Nut Indicator
402-21046	CPOHY46MM	CHECKPOINT 46mm Orange Hi-Temp Loose Lug Nut Indicator
<b>POINT TO POINT</b>		
402-20133	CPCYPP33MM	CHECKPOINT Caution Yellow Point to Point 33MM Loose Lug Nut Indicator
402-20333	CPTRPP33MM	CHECKTORQUE Point to Point 33MM Red Loose Lug Nut Indicator

Ascot No.	Mfg. No.	Description
402-23133	CPOHTPP33MM	Checkpoint Point to Point 33MM Orange Hi-Temp Loose Lug Nut Indicator
<b>DUSTITE</b>		
402-24027	CPDTY27MM	Dustite Yellow 27mm Loose Lug Nut Indicator
402-24028	CPDTY28MM	Dustite Yellow 28mm Loose Lug Nut Indicator
402-24030	CPDTY30MM	Dustite Yellow 30mm Loose Lug Nut Indicator
402-24032	CPDTY32MM	Dustite Yellow 32mm Loose Lug Nut Indicator
402-24033	CPDTY33MM	Dustite Yellow 33mm Loose Lug Nut Indicator
402-24038	CPDTY38MM	Dustite Yellow 38mm Loose Lug Nut Indicator
402-24133	CPDTSG33MM	Dustite Silver Gray 33mm Loose Lug Nut Indicator
<b>DUSTITE LONG REACH</b>		
402-25032	CPDTRLRY32MM	Dustite Long Reach Yellow 32mm Loose Lug Nut Indicator
402-25033	CPDTRLRY33MM	Dustite Long Reach Yellow 33mm Loose Lug Nut Indicator
402-25133	CPDTRLRG33MM	Dustite Long Reach Silver Gray 33mm Loose Lug Nut Indicator
402-25021	CPDTRLRY21MM	Dustite Long Reach Yellow 21mm Loose Lug Nut Indicator
402-25022	CPDTRLRY22MM	Dustite Long Reach Yellow 22mm Loose Lug Nut Indicator

\*The use of CHECKPOINT Loose Lug Nut Indicators does not guarantee wheel-offs will not occur.

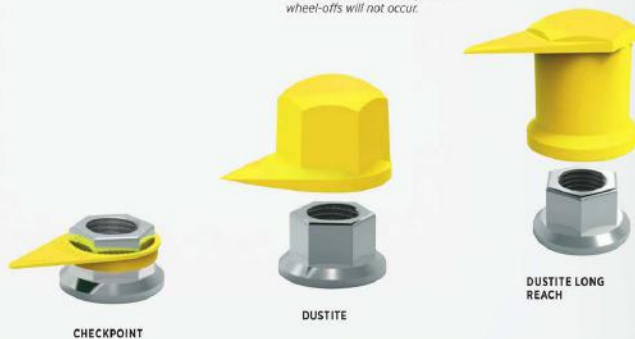

## HEXCHEX MULTI-SIZE LOOSE WHEEL NUT INDICATOR

- 7 SKUs work for 31 different nut sizes! • Easier to store on the shelves and to find the correct part for the customer • Designed not to melt under heavy braking situations but will melt if the hub overheats which will alert driver of hub problems • If HexChex melts, the non stick material is removed easily without damaging your wheels or lug nuts • Easy to use and no tools are needed for the application • Fits around any shaped nut including 8 or 10 sided custom nuts • HexChex are made of durable polymer and are chemical resistant

Ascot No.	Mfg. No.	Description
402-30601	KT #30601	Metric: 19mm - 23mm SAE 3/4" - 1"
402-30602	KT #30602	Metric: 23mm - 30mm SAE 1" - 1 3/16"
402-30603	KT #30603	Metric: 30mm - 38mm SAE 1 3/16" - 1 1/2"
402-30604	KT #30604	Metric: 38mm - 50mm SAE 1 1/2" - 2"
402-30607	KT #30603R (Red)	Metric: 30mm - 38mm SAE: 1-3/16" to 1-1/2"
402-30608	KT #30603G (Green)	Metric: 30mm - 38mm SAE: 1-3/16" to 1-1/2"
402-30609	KT #30603B (Black)	Metric: 30mm - 38mm SAE: 1-3/16" to 1-1/2"



402-30601

ONLY 7 SKUS FOR 31 SIZES

CHEMICAL RESISTANT

## ROLLOCK - LOOSE NUT PREVENTION

- Cost effective way to prevent wheel nuts from loosening • Galvanized steel product locks wheel nuts in place • APPLICATION: ROLLOCK is for use on 19.5 & 22.5 Hub-Piloted Wheels (8 or 10 hole) • ROLLOCK IS EASY TO REMOVE: Unscrew the Wheel Nut in normal manner and the ROLLOCK clamp will easily come off



The Rollock is a cost effective way to prevent nuts from loosening.



402-62000



Ascot No.	Mfg. No.	Description
402-62000	62000	Rollock, 4-1/8" Spacing, 30-33mm Nut
402-62500	62500	Rollock, 3-1/2" Spacing, 30-33mm Nut

## LUG LOCK WHEEL NUT RETAINERS

- Use the resistance between two nuts to minimize their ability to rotate and loosen • Flexible and easy to install, fits over two adjacent nuts • Field tested at high and low rotation levels • Lab tested in severe vibration conditions • APPLICATION: Designed to be used on wheels with 33mm nuts on 3.5" stud centers • Compatible with a complete wheel mounting safety program • Other sizes and colors available



Ascot No.	Mfg. No.	Description
402-62600	62600	3 1/2" Spacing, 350 degrees



402-62600

Other sizes and colors available.



The Lug Lock Wheel Nut Retainers in use.



## WHEEL CENTERING PRODUCTS



### COUNTERACT WHEEL CENTERING SLEEVES

• Patent pending wheel centering system that works in conjunction with your OEM style two-piece flange nuts • Unique self-sizing & non-corrosive design is made to take-up the gap between the 22mm stud and the 26mm wheel opening, re-aligning the wheel to the TRUE CENTER of the hub bearing • **BENEFITS INCLUDE:** Increased fuel mileage, increased tire life, decreased tire vibration, stops irregular tire wear, decreased tire maintenance, reduced tire cupping, reduced "wheel off" conditions • Specifically designed to ensure your wheel is centered on the wheel assembly • Made from a high temperature resistant polyamide



The Counteract Wheel Centering Sleeves in use.



Ascot No.	Mfg. No.	Description
491-02006	WCS-B	Counteract Wheel Centering Sleeves (Pack of 6)
491-02100	WCS-C	Counteract Wheel Centering Sleeves (Bucket of 100)
491-02101	WCS-D	Counteract Wheel Centering Sleeves (Bucket of 1000 w/ Installation Tool)

### COUNTERACT INSTALLATION/REMOVAL TOOL

• Specifically designed to install and remove Counteract Centering Sleeves

Ascot No.	Mfg. No.	Description
491-02111	WCS-IT	Counteract Installation/Removal Tool



### "EZ ON" WHEEL & BRAKE DRUM CENTERING SLEEVES

• These sets center both steer axle HD wheels and brake drums to minimize wheel vibrations, brake pedal pulsations and wheel hop • **APPLICATION:** For both Aluminum and Steel steer wheels and a variety of brake drum types

Ascot No.	Mfg. No.	Description
491-32120	32120	Aluminum 1.25" hole/.5" depth
491-32121	32121	Aluminum 1.25" hole/.25" to .3125" depth
491-32124	32124	Steel 1.25" hole/.5" depth



### O-LINE-ER WHEEL STUD ALIGNMENT TOOL

• Makes it easy to line up wheel studs with holes in rim for easy installation • Decreased installation time • Increase worker productivity • Reduce risk of injury from struggling with heavy tires and rims

Ascot No.	Mfg. No.	Description
491-00101	GTO-01TB	O-Line-Er Wheel Stud Alignment Tool



O-LINE-ER #GTO-01TB

491-00101

The O-Line-Er Wheel Stud Alignment Tool makes it easy to line up wheel studs with holes in rim for easy installation.

### "SOLUTION B" INTERNAL CENTERING SLEEVES

• Threaded Inside for best positioning and retention • Stays on wheels • Zinc plated to resist corrosion • All brake drum numbers are subject to change without warning due to manufacturer changes beyond our control • Sold in sets of 6 per axle

#### "SOLUTION A" WHEEL CENTERING PIN SETS

• Reusable Shop Tool • Hardened Steel • Threaded Inside for Easy Removal • Sold in sets of 3 with storage case

Ascot No.	Mfg. No.	Description
491-02666	A-2666	Steer & Drive axles, 5" length, Steel & Aluminum wheels, will center 1" brake drums
491-01573	A-1573	Steer & Drive axles and some trailers, 4" length, Steel & Aluminum Wheels
491-01339	A-1339	Steer axles, 3" length, Steel & Aluminum wheels



Ascot No.	Mfg. No.	Description	Gunite #
491-01504	B-1504-GA	1.25" diameter hole, 1/2" hole depth	3573X 3687X 3758X 3596X 3710X 3774X 3597X 3786X 3800X 3598X 3721AX 3686X 3726X

Ascot No.	Mfg. No.	Description	Conmet #
491-01825	B-1825-CON-A	1.34 - 1.37" diameter hole, 1/2" hole depth	107507 1001783 10005331 10033071 10005332 10037815 10009920

Ascot No.	Mfg. No.	Description	Conmet #		WEBB #	
	B-1860-CON-A	1.28" diameter hole, 1/2" hole depth	107164	10001780	65161B	65548B
			107193	10001781	65167B	65554B
			107453	10001783	61528B	65710B
			107862		65547B	

Ascot No.	Mfg. No.	Description	Gunite #	Motor Wheel Centrifuse #	Arvin Meritor #
491-01594	B-1594-CA	1.25" Diameter Hole, 1/4" Hole Depth	9001X	90089BK	53-123512-002
			9000X	89870BK	53-123542-002
			9035X	90174BK	53-123627-002
				91265B	53-123-589-002
				90600B	53-123-608-002
				90137B	





## LUG NUT REMOVAL PRODUCTS

### NUT BUDDY LUG NUT REMOVER

- It loosens the most stubborn wheel nuts • APPLICATION: Use on commercial or agricultural wheels • GEAR RATIO: 58:1
- RATED OUTPUT TORQUE: 2950 ft/lbs. • TWO SOCKETS INCLUDED: 1-1/2" (38mm) and 1-5/16" (33mm)



404-67300

Ascot No.	Mfg. No.	Description
404-67300	67300	Nut Buddy Lug Nut Remover



### PORTABLE TRUCK WHEEL STUD REMOVER & INSTALLER

- Power of a 10-ton shop press
- Remove and install studs without removing the hub
- Two-hour job is done in twenty minutes without risk of damaging seals or bearings
- Any mechanic can use it to get the job done right in minutes



POWER OF A 10-TON SHOP PRESS

QUICK AND EASY TO USE

Ascot No.	Mfg. No.	Description
492-06247	6247	PakPress Cart
492-06346	6346	Complete PakPress Kit - Includes Cart

### 9-PIECE SAVE-A-STUD RETHREAD KIT

- Repairs damaged wheel studs
- 9-Piece Rethread Kit
- For passenger, light truck, and heavy duty
- Guaranteed for life
- Individual dies available



493-31210

LIFETIME GUARANTEE

#### KIT CONTENTS

SAE: 7/16"-20, 1/2"-20, 9/16"-18, 5/8"-18  
METRIC: 12mm-1.25, 12mm-1.50, 12mm-1.75, 14mm-1.50, 14mm-2.00

Ascot No.	Mfg. No.	Description
493-31210	31210	9-Piece Save-A-Stud Rethread Kit



### SAV-A-STUD RETHREAD KIT - TRUCK

- Repairs wheel studs, spindles and standard threaded studs
- Lifetime warranty



493-30125

Ascot No.	Mfg. No.	Description
493-30120	30120	<b>Save-A-Stud Plus Rethread Kit (9 pcs.)</b> - INCLUDES: 9/16" - 18, 5/8" - 18, 14mm - 1.5, 14mm - 2.0, 7/16" x 20, 1/2" - 20 Right, 12mm - 1.25, 12mm - 1.5, 12mm - 1.75
493-30125	30125	<b>Save-A-Stud Plus HD (3 pcs.)</b> - INCLUDES: 3/4" - 16" Right, 3/4" - 16" Left, 22 - 1.5mm

### COMMERCIAL TRUCK CHROME LUG NUT PULLER

- Thick carbon steel material provides strength for heavy duty applications
- Round shape handle provides comfort and ease of operation
- Suitable for all heavy duty truck lug nut applications
- Two hole design can be switched to expand range and size of application
- Coated jaws protect painted, aluminum or chrome plated lug nuts from damage

HEAVY DUTY

COATED TO PREVENT DAMAGE

Ascot No.	Mfg. No.	Description
402-03116	202603-HD	Commercial Truck Chrome Lug Nut Puller

### HEAVY DUTY PROFESSIONAL CHROME NUT PULLER

- Coated to prevent scratching or damage to chrome, coated or painted lug covers
- Cushioned grip to prevent slippage
- **NO ADJUSTMENT REQUIRED:** Fits all 33mm & 1 1/2" covers
- Similar to Ken Tool 30606

CUSHIONED GRIP

HEAVY DUTY

COATED TO PREVENT DAMAGE

Ascot No.	Mfg. No.	Description
402-03016	202603	Heavy Duty Professional Chrome Nut Puller with Cushion Handle

### CHROME LUG NUT COVER REMOVER

- Coated to prevent scratching or damage to chrome, coated or painted lug covers
- Cushioned grip to prevent slippage

CUSHIONED GRIP

COATED TO PREVENT DAMAGE

Ascot No.	Mfg. No.	Description
402-30606	30606	Chrome Lug Nut Cover Remover

### 4-PIECE LUG NUT REMOVER IMPACT SOCKET SET

- APPLICATION: Use for removing wheel locks or damaged lug nuts • Patented, internal tapered reverse threads lock onto damaged nut and easily pulls off using impact wrench • Convenient compact storage case • INCLUDES THE FOLLOWING 1/2" DRIVE SIZES: 3/4", 13/16", 1", 1-1/8" • **MADE IN USA**

Ascot No.	Mfg. No.	Description
492-30254	30254	4-Piece Lug Nut Remover Impact Socket Set INCLUDES: 3/4", 13/16", 1", 1-1/8" (1/2" Drive)

### 4-PIECE HEAVY DUTY WHEEL STUD REMOVER SET

- APPLICATION: Removes damaged wheel studs and inner Budd nuts
- Patented, internal tapered reverse threads lock onto damaged stud or nut and easily pulls off using impact wrench • Wheel Stud Removers are 3/4" hex drive • Budd Nut Removers are 1-1/8" hex drive • Convenient compact storage case, 6.5" x 4.5" x 2.75"; 3.5 lbs • SET INCLUDES THE FOLLOWING SIZES: 5/8", 3/4", 1-1/8" Budd wheel inner nut left hand thread, 1-1/8" Budd wheel inner nut right hand thread • **MADE IN USA**

Ascot No.	Mfg. No.	Description
492-30649	30649	4-Piece Heavy Duty Wheel Stud Remover Set INCLUDES: 5/8", 3/4", 1-1/8" Budd left hand, 1-1/8" Budd right hand

402-03116  
Commercial  
Truck Chrome  
Lug Nut Puller402-03016  
Heavy Duty  
Professional  
Chrome Nut Puller402-30606  
Chrome Lug Nut  
Cover Remover

492-30254

492-30649



## WHEEL ATTACHING HARDWARE



### GRADE 8 DISC WHEEL HARDWARE-INNER CAP NUTS

Ascot No. for Sirco	Sirco No.	Ascot No. for GLP	GLP No.	Outer Thread	Inner Thread	Overall Length	Similar To:			
491-00708	708AR	491-01001 (RH)	GL-1001	1 1/8" - 16	3/4" - 16	2 7/32"	Budd 10708	Euclid 7895R	Leland W-11	Steel/Steel
491-00709	709AL	491-01002 (LH)	GL-1002	1 1/8" - 16	3/4" - 16	2 7/32"	Budd 10709	Euclid 7895L	Leland W-12	Steel/Steel
491-00896	896R	491-01003 (RH)	GL-1003	1 1/8" - 16	3/4" - 16	2 9/16"	Budd 35336	Euclid 7896R	Leland W-620	Steel/Alum
491-01896	896L	491-01004 (LH)	GL-1004	1 1/8" - 16	3/4" - 16	2 9/16"	Budd 35337	Euclid 7896L	Leland W-621	Steel/Alum
491-00897	897R	491-01005 (RH)	GL-1005	1 1/8" - 16	3/4" - 16	3 1/16"	Budd 22621	Euclid 7897R	Leland W-616	Steel/Alum
491-01897	897L	491-01006 (LH)	GL-1006	1 1/8" - 16	3/4" - 16	3 1/16"	Budd 22622	Euclid 7897L	Leland W-617	Steel/Alum
491-00978	988R	491-01011 (RH)	GL-1011	1 1/8" - 16	3/4" - 16	3 1/16"	Alcoa 5988R	Euclid 5988R	Leland W-486	Alum/Alum
491-01978	988L	491-01012 (LH)	GL-1012	1 1/8" - 16	3/4" - 16	3 1/16"	Alcoa 5988L	Euclid 5988L	Leland W-487	Alum/Alum

#### METRIC

491-00306	306R	491-01009 (RH)	GL-1009	M30 -1.5	M20 -1.5	M-62 (2 7/16")	Hino 900423101	Isuzu 1-42335005 - Zinc		
491-01306	306L	491-01010 (LH)	GL-1010	M30 -1.5	M20 -1.5	M-62 (2 7/16")	Hino 900424101	Isuzu 1-42336005 - Zinc		



491-01001



491-01003



491-01011

### GRADE 8 DISC WHEEL HARDWARE-OUTER CAP NUTS

Ascot No. for Sirco	Sirco No.	Ascot No. for Haltec	Haltec No.	Similar To:		
491-00891	891AR	491-02001 (RH)	GL-2001	Budd 37891	Euclid 5997R	Leland W-13
491-00892	892AL	491-02002 (LH)	GL-2002	Budd 37892	Euclid 5997L	Leland W-14
491-00888	888R	491-02101 (RH)	GL-2101	Budd 37888	Euclid 5652R	Leland W-15
491-00889	889L	491-02102 (LH)	GL-2102	Budd 37889	Euclid 5652L	Leland W-16
491-00995	995R	491-02103 (RH)	GL-2103	Alcoa 5995R	Euclid 5995R	Leland W-506
491-01995	995L	491-02104 (LH)	GL-2104	Alcoa 5995L	Euclid 5995L	Leland W-507
N/A	891BR	491-01891	GL-2004	THRU HARDNESS - GMC-3988631		
N/A	892BL	491-02892	GL-2003			
N/A	N/A	491-02203	GL-2203	Budd 95188	Euclid 9022R	Dodge 3637719
N/A	N/A	491-02204	GL-2204	Budd 95189	Euclid 9022L	Dodge 3637720
N/A	N/A	491-02202	GL-2202	Budd 81269	Euclid 5734	GMC 3771410
N/A	N/A	491-02303	GL-2303	Alca 389928	Ford E41Z-1012A	N/A

#### METRIC

491-00304	304R	491-02009	GL-2009	Hino 900423112	Isuzu 1-42333023	Leland W-722/3
491-01304	304L	491-02010	GL-2010	Hino 900422104	Isuzu 1-42334023	Euclid 10254R/L
491-00033	333B	491-02301	GL-2301	Budd 106333	Euclid 6000A	Leland W-498
491-00881	881M	491-02302	GL-2302	MW 88881	Euclid 5991	Leland W-492

### INSTALLATION TOOL FOR ALCOA HUB COVER SYSTEMS

- **APPLICATION:** For use with Alcoa 076185, 077185, 076188 & 077188 Hub Systems

Ascot No.	Mfg. No.	Description
491-00600	600	Installation Tool for Alcoa Hub Cover Systems

491-00600  
Installation Tool for Alcoa Hub Cover Systems

491-02001



491-02203



Lubricate nut &amp; stud before applying to the vehicle

### MUD FLAP BOLT KIT

- All the hardware needed to attach mud flaps to trucks or trailers • **INCLUDES:** (4) 3/8"-16 x 1-1/4" bolts, (4) 3/8" Nuts, (8) 3/8" flat washers & (4) 3/8" lock washers

491-00038  
Mud Flap Bolt Kit

Ascot No.	Mfg. No.	Description
491-00038	MF8K	Mud Flap Bolt Kit

### SPOKE WHEEL HARDWARE



491-03005



491-03002

Ascot No. for Sirco	Sirco No.	Ascot No. for GLP	GLP No.	Thread	Similar To:		
RIM CLAMP NUTS							
491-00149	149	491-03004	GL- 3004	5/8-11	Dayton 5149	Euclid 4962	Leland W-7
491-00716	716	491-03005	GL- 3005	3/4-10	Dayton 5716	Euclid 4963	Leland W-8
RIM STUDS (GRADE 8)							
491-00654	654	491-03001	GL- 3001	5/8- 11x2-3/4	Dayton 6654	Euclid 4958	Leland W-5
N/A	N/A	491-03002	GL- 3002	3/4-10x3	Dayton 5715	Euclid 4956- A	Leland W-6



491-06023

### LOCKING BACK NUTS

Ascot No.	Mfg. No.	Size	Similar To:	
491-06023	GL-6023	5/8"-18	MW 85643	—
491-02431	GL-2431	7/8"-14	Budd 41073-8	Euclid 1835
491-02445	GL-2445	1"-14	Budd 44672-9	Euclid 1828

### OIL SEAL HUBCAPS AND GASKETS

491-04009



Ascot No.	Mfg. No.	Description
491-04009	GL-4009	Standard 6-Hole Hubcap
491-04012	GL-4012	6-Hole Gasket for Above
491-04013	GL-4013	Universal Gasket - 5 or 6 Hole
491-04020	GL-4020	Replaceable Window Kit
491-04021	GL-4021	Rubber Plug for Bolt-On Cap
491-09013	GL-4913	Fruehauf/Proper Cap
491-09014	GL-4974	O-Ring for Screw-On Cap
491-09015	GL-4975	Rubber Plug for Screw-On Cap



491-00014

### CONE WHEEL NUTS

Ascot No.	Mfg. No.	Size	Description
491-00014	GL-0014	7/16"-20 (3/4" Hex, 9/16" High)	G.M.
491-00016	GL-0016	1/2"-20 (13/16" Hex, 5/8" High)	Ford
491-00027	GL-0027	1/2"-20 (3/4" Hex, 9/16" High)	Chrysler
491-00062	GL-0062	12mm-1.5 (19mm Hex, 14mm High)	G.M.
491-00066	GL-0066	12mm-1.5 (21mm Hex, 16mm High)	Toyota
491-00065	GL-0065	12mm-1.25 (21mm Hex, 16mm High)	Nissan
491-00064	GL-0064	12mm-1.25 (19mm Hex, 16mm High)	Nissan
491-00052	GL-0052	9/16"-18 (7/8" Hex, 3/4" High)	G.M.
491-00055	GL-0055	R.H. 5/8"-18 (1" Hex, 21/32" High)	Budd 67147
491-00056	GL-0056	L.H. 5/8"-18 (1" Hex, 21/32" High)	Budd 67147



491-06014

### BRAKE DRUM MOUNTING HARDWARE

Ascot No.	Mfg. No.	Size	Description
491-06012	GL-6012	5/8-18 x 2"	5/8" Brake Bolt/Washer/Assembly
491-06014	GL-6014	3/4-16 x 2"	3/4" Brake Bolt/Washer/Assembly
491-06020	GL-6020	5/8-18 x 2"	Brake Bolt Only
491-06021	GL-6021	3/4-16 x 2"	Brake Bolt Only
491-06025	GL-6025	5/8"	Flat Washer
491-06026	GL-6026	3/4"	Flat Washer
491-06023	GL-6023	5/8"-18"	Lock Nut Only
491-06024	GL-6024	3/4"-16"	Lock Nut Only

## WHEEL ATTACHING HARDWARE

### RIM CLAMPS

Ascot No. for Sirco	Sirco No.	Ascot No. for GLP	GLP No.	A Dim.	B Dim.	C Dim.	Similar To:
491-00399	399	491-03083	GL-3083	N/A	N/A	N/A	Euclid 5927 Dayton 8399
491-00729	729	491-03087	GL-3087	N/A	N/A	N/A	Euclid 5838 Dayton 09-729514
491-00123	123	491-03096	GL-3096	1-1/8"	2-7/8"	2-11/32", 3/4" Stud	Euclid 5571A Dayton 6123
491-00235	235	491-03097	GL-3097	1-3/4"	2-7/8"	2-11/32", 3/4" Stud	Euclid 5572A Dayton 6235
491-00993	993	491-03098	GL-3098	1-1/2"	2-7/8"	2-11/32", 3/4" Stud	Euclid 5040A Dayton 6993
N/A	N/A	491-03099	GL-3099	2-1/8"	2-7/8"	2-11/32", 3/4" Stud	Euclid 5786 Dayton 70317
N/A	N/A	491-03101	GL-3101	1-7/8"	2-7/8"	2-11/32", 3/4" Stud	Webb 16124 Dayton 851817
N/A	N/A	491-03103	GL-3103	1-1/4"	2-7/8"	2-11/32", 3/4" Stud	Euclid 5784 Dayton 8708
491-00053	053	491-03104	GL-3104	2"	2-7/8"	2-11/32", 3/4" Stud	Euclid 5785 Dayton 870917
Ascot No. for Sirco	Sirco No.	Ascot No. for GLP	GLP No.	Similar To:			
491-00257	257	491-03113	GL-3113	Mack 15QJ-17P1	Euclid 5828	Leland W-450	
491-00238	238	491-03271	GL-3271	Mack 15QJ-2238P8	Euclid 5781	Leland W-448	
491-00233	233	491-03279	GL-3279	Mack 15QJ-2238P3	Euclid 5821	Leland W-467	
N/A	N/A	491-06115	GL-6115	Kelsey 79954	N/A	N/A	



### STANDARD WHEEL RIM GUARD

- **APPLICATION:** Protects aluminum, chrome and painted truck rims/wheels during stud and nut removal
- Inexpensive
- Tough polymer design



402-50301

Ascot No.	Mfg. No.	Description
402-50301	50301	Standard Wheel Rim Guard



The standard wheel rim guard in use.

### DISCMATE WHEEL PROTECTORS

- Used to protect the wheel's mounting surface from cosmetic damage during use
- Placed between the wheel and it's mounting surface on the vehicle and may also be used between 2 dual wheels for added protection
- Wheel nuts should always be tightened to the correct torque following the wheel manufacturer's specifications

Discmate  
Wheel  
Protectors

Ascot No.	Mfg. No.	Description
402-11000	61020	10-Hole 285.75mm, Hub Pilot, 22mm Studs
402-17000	61000	10-Hole 11-1/4" Stud-Pilot, 1-1/8" Studs
402-18000	61040	10-Hole 335mm, 32mm Cap Nuts, 22mm Studs



### SKIRT NUTS

- Stops wheel/hub vibrations and many tire wearing problems
- Stops wheel movement (clocking) on the face of the hub
- Eliminates wasted fuel caused by rolling resistance or "drag"
- Meets and exceeds standards of SAE J1965 for torque tension
- Replaces all style M22 flange nuts on hub-piloted wheel
- **HEX:** 33mm
- Special graphite coating prevents nut from rusting onto the hub
- Fills in the gap between the stud and the bolt 3/16" (5mm)
- **QUANTITY:** 25 per box

491-02906  
6mm Sleeve491-02928  
28mm Sleeve491-02301  
33mm  
2-Piece  
Flange Nut491-02919  
19mm Sleeve491-02939  
39mm Sleeve

Extended threading allowing Skirt Nut to go down into Hub-Piloted Disc Wheel an extra 3/16" (5mm) into stud hole



There is a fairly large tolerance between the diameter of each stud hole and the diameter of the stud itself.





### 33MM SKIRT NUT

- Original Skirt Nut • Replaces standard M22 flange nuts on 11.25" hub-piloted wheels
- Partially penetrates the stud hole and prevents clocking and vibration
- Quantity: 100 per case



491-01133


Ascot No.	Mfg. No.	Description
491-01133	SN-M22	33mm Skirt Nut



Oil Nut




Oil Stud


**WHEEL ASSEMBLY WITH STANDARD NUT**

Void (Highlighted in Green) between stud and hole


**WHEEL ASSEMBLY WITH HUB CENTRIC NUT**

Hub Centric Nut fills void between stud and hole



Note marks on the disc (just outside stud hole) caused by "clocking"

### HUB CENTRIC NUT

By filling the void between the stud hole, "clocking" is eliminated, and problems caused by clocking, such as wheel offs and wheel hub vibrations, are eliminated.

- **Hub Centric Nut fills void standard flange nuts don't**
- **Stops rim from shifting** forwards or backwards
- **Eliminates "clocking"** caused by standard wheel nuts not filling wheel hole completely
- Metric 2-piece hub centering nut
- **Elongated neck** for centering the wheel to the hub
- **Certified American Steel**
- **Each part tested** for thread, fit and finish
- **QUANTITY:** 50 per box

Ascot No.	Mfg. No.	Description
491-00133	X10-PN22B	33mm Hex X 1.5mm Thread

SIDE VIEW

491-00133  
Hub Centric Nut

TOP VIEW



This nut had been torqued to specifications and retorqued per factory settings.

## TIRE & WHEEL SERVICE TOOLS

### WHEELOK SYSTEMS FOR HEAVY DUTY VEHICLES

- **APPLICATION:** For trucks, tractors or trailers with spoke (Dayton) Wheels



401-10430



401-10431

Ascot No.	Mfg. No.	Description
401-10431	X10-DN43Z	Wheelok Nut & Free Spinning Sleeve - 2 Recommended For Each Wheel To Replace 2 Regular Nuts
401-10430	X10-DK43Z	Wheelok Key With Replaceable Pin - "Combination" Determined By Position Of Pins

### WHEELOK SYSTEMS FOR HEAVY DUTY VEHICLES

- **APPLICATION:** For trucks, tractors or trailers with Budd Unimount™ Wheels - 22mm thread or equivalent



401-10220

Ascot No.	Mfg. No.	Description
401-10220	X10-UN22Z	Wheelok Nut, Flange and Free Spinning Sleeve - Combined into One Single Unit
401-10221	X10-UK22Z	Wheelok Key with Replaceable Pin - "Combination" Determined By Position Of Pins

### WHEELOK SYSTEMS FOR HEAVY DUTY VEHICLES: FRONT WHEELS

- **APPLICATION:** For trucks, tractors or trailers with disc (Budd) Wheels; For truck or tractor front wheels

Ascot No.	Mfg. No.	Description
401-10160	X10-BN16Z	Wheelok Nut & Free Spinning Sleeve - Right-Hand Thread - 2 For Each Wheel To Replace 2 Regular Nuts
401-10170	X10-BN17Z	Wheelok Nut & Free Spinning Sleeve - Left-Hand Thread - 2 For Each Wheel To Replace 2 Regular Nuts

### WHEELOK SYSTEMS FOR HEAVY DUTY VEHICLES: REAR WHEELS

- **APPLICATION:** For trucks, tractors or trailers with disc (Budd) Wheels; For truck or tractor rear wheels

Ascot No.	Mfg. No.	Description
401-10280	X10-BN28Z	Wheelok Nut Only - Right Hand Thread - 2 For Each Wheel To Replace 2 Regular Nuts
401-10290	X10-BN29Z	Wheelok Nut Only - Left Hand Thread - 2 For Each Wheel To Replace 2 Regular Nuts
401-10810	X10-BK81Z	Wheelok Key With Replaceable Pin - "Combination" Determined By Position Of Pins

### RIB NUT SALVAGE TOOL KIT

- **INCLUDES:** (1) Drift Pin, (1) Salvage Cylinder, (1) LH Thread Bolt, (1) RH Thread Bolt

Ascot No.	Mfg. No.	Description
499-10150	X10-LS15B	Rib Nut Salvage Tool Kit



499-10150

### 3-PIECE HEX NUT REMOVER KITS



492-15000

Ascot No.	Mfg. No.	Description
492-15000	X10-NR15B	1-1/2" Hex Nut Remover Kit - 3 Piece
492-14000	X10-NR14B	1-1/4" Hex Nut Remover Kit - 3 Piece

## TIRE &amp; WHEEL SERVICE TOOLS



## STUD INSTALLERS



492-10158



492-10134

Ascot No.	Mfg. No.	Description
492-10134	X10-SI34Z	For 3/4" Studs. Fits 1-1/4" Socket
492-10150	X10-LC15B	Rib Nut Salvage Cylinder
492-10158	X10-SI58Z	For 5/8" Studs. Fits 1-1/4" Socket
492-10159	X10-SI59Z	For 5/8" x 18 Studs. Fits 1-1/4" Socket
492-10196	X10-SI96Z	For 9/16" x 18 Studs. Fits 1-1/4" Socket
492-10590	X10-SI59Z	5/8"-18 Stud Installer

## TRUCK WHEEL STUD INSTALLER

- Prevents damage to your lug nuts or new stud by reducing friction during installation • Works with hubs, rotors and axles • Fits studs up to 22mm (7/8")



492-02278

Ascot No.	Mfg. No.	Description
492-02278	TWS-22	Truck Wheel Stud Installer

## TRUCK WHEEL STUD INSTALLER

- Fits truck wheel studs up to 22mm (7/8") in diameter • Use with an impact wrench or ratchet • The tool body is equipped with a thrust bearing to easily pull the new wheel stud into place • Use the lug nut to tighten against the tool body to pull the stud in position



492-28950

Ascot No.	Mfg. No.	Description
492-28950	28950	Truck Wheel Stud Installer

## STUD REMOVERS

Ascot No.	Mfg. No.	Description
492-10340	X10-SR34B	For 3/4" Studs. Fits 1-1/4" Socket
492-10580	X10-SR58B	For 5/8" Studs. Fits 1-1/4" Socket
492-10180	X10-SR18B	For 1-1/8" Studs. Fits 1-1/4" Socket
492-10780	X10-SR78B	For 7/8" Studs. Fits 1-1/4" Socket

## 13/16" SQUARE HEAD ADAPTER



499-10130

Ascot No.	Mfg. No.	Description
499-10130	X10-SA13B	Fits 1-1/2" Socket Wrench to Speed Up Installing Or Removing Budd Wheel Inner Cap Nuts
499-10171	X10-SA17B	17mm Stud Adapter
499-10210	X10-SA21B	21mm Stud Adapter

## HEAVY DUTY DRIVE-ON RIB-GRIP LUG-OFF KITS



499-10200

Ascot No.	Mfg. No.	Description
499-10200	X10-LT20B	For Removing Damaged Inner Cap Nuts (1-1/8" Dia. - 13/16" Square Head) <b>INCLUDES:</b> (1) Drive-On Tool And (1) Rib Nut
499-10340	X10-LT34B	For Removing Damaged 3/4" Lug Studs. <b>INCLUDES:</b> (1) Drive-On Tool And (1) Rib Nut
499-10580	X10-LT58B	For Removing Damaged 5/8" Lug Studs. <b>INCLUDES:</b> (1) Drive-On Tool, (1) Rib Nut
499-10660	X10-LT66B	Triple Duty Tool For Removing Damaged Budd Wheel Inner Cap Nuts, 3/4" And 5/8" Lug Studs. <b>INCLUDES:</b> (1) Drive-On Tool and (3) Rib Nuts

## REPLACEMENT RIB NUTS

Ascot No.	Mfg. No.	Description
499-10180	X10-LN18B	For Budd Wheel Inner Cap Nuts
499-10341	X10-LN34B	For 3/4" Lug Studs
499-10581	X10-LN58B	For 5/8" Lug Studs
499-10211	X10-LN21B	For 21mm Lug Studs
499-11171	X10-LN17B	For 17mm Lug Studs
492-10151	X10-LP15Z	Drive Pin



## HEAVY DUTY WHEEL STUD SERVICE KIT

- Works on most hubs for installation and removal.
- All sizes of studs.
- Installation done by pushing on the head, eliminating the need for threaded adapters.
- Reduces number of adapters required
- Reduces damage to studs
- Increases ease of use
- Remove and install 10 studs in only 10-15 minutes (compare to 20-30 minutes for more expensive competitive products).
- Can be powered with an impact wrench, no hydraulic power source required.
- No need to remove hub from vehicle.
- Reduces risk of damage to hubs, studs, and bearings when using tool.
- Weighs only 12 lbs., assembled to remove studs and 14 lbs., assembled to install studs.

Ascot No.	Mfg. No.	Description
493-91420	NS-9142	Heavy Duty Wheel Stud Service Kit

493-91420  
Wheel Stud Service Kit

## ALCOA WHEEL INSTALLATION SLEEVES

- Align wheel bolt holes • Seat brake drums that have .980" diameter bolt holes • Prevent damage to M22x1.5 studs • Assist in lining up all components for ease of install • **INCLUDES:** 2 tools per kit • **Made in USA**



491-00426

Ascot No.	Mfg. No.	Description
491-00426	407422	Alcoa Wheel Installation Sleeves



## UNI-MOUNT M22 THREAD PITCH GAUGE

- **APPLICATION:** Designed for M22 x 1.5 Uni-Mount Studs
- If the thread teeth do not fully engage the stud, the stud should be removed from service
- Simple to use



401-69260

Ascot No.	Mfg. No.	Description
401-69260	62960	Uni-Mount Thread Gauge



Ascot No.	Mfg. No.	Description
401-69290	69290	Chamfer Nut Gauge



## ALCOA RIM FLANGE WEAR GAUGE

- Determines if wheel must be removed from service due to excessive rim flange wear



401-00700

Ascot No.	Mfg. No.	Description
401-00700	000700	Alcoa Rim Flange Wear Gauge





## STUD & HUB CLEANING TOOLS



### STUD CLEANING TOOLS

- Allows for cleaning the full length of the thread on 10 studs in less than 3 minutes
- Works with air or hand tools
- **CAUTION:** Always use eye protection
- 1/2" adapter included with each tool
- Replacement Brushes Available

Ascot No. Mfg. No. Description

#### REPLACEMENT BRUSHES FOR STUD CLEANING TOOLS

402-00112	SBR12	12mm (7/16") Repl. Brush
402-00113	SBR13	13mm (1/2") Repl. Brush
402-00014	SBR14	14mm (9/16") Repl. Brush
402-00016	SBR16	16mm (5/8") Repl. Brush
402-00118	SBR18	18mm (43/64") Repl. Brush
402-00120	SBR20	20mm (25/32") Repl. Brush
402-00122	SBR22	22mm (7/8") Repl. Brush
402-00128	SBR28	28mm (1-1/8") Repl. Brush



QUICK & EASY TO USE

WORKS WITH AIR OR HAND TOOLS



Replacement Brush for Stud Cleaning Tool

402-00028

Ascot No. Mfg. No. Description

402-00013	SBCT-13	13mm (1/2") Stud Cleaning Tool
402-00022	SBCT-22	22mm (7/8") Stud Cleaning Tool
402-00028	SBCT28	28mm (1-1/8") Stud Cleaning Tool

### WHEEL HUB GRINDER

- Special grinder for cleaning the wheel centering device as well as the attachment area between the wheel and hub • Burned in corrosion residues are completely removed in a quick and easy process
- Actual cleaning time per hub only takes between 3-25 seconds depending upon residue thickness
- Replacement Discs Available



### INNER RIM CLEANER AND REPLACEMENT DISCS

- Meant for the optimal cleaning of the inner wheel contact surface
- Prevents corrosion related distortion of wheel bolt tightening torque • Allows for the complete removal of burnt in corrosion • Used only on the inside of an aluminum rim • Velcro adhesive makes it easy to change out replacement discs
- 75mm diameter in size • **REPLACEMENT DISCS AVAILABLE:** 3 per box



Ascot No. Mfg. No. Description

402-43352	433 502/M	Wheel Hub Grinder
402-43351	433 501	Grinder Replacement Discs (3 per package)



### IMPACT WHEEL HUB CLEANER

- Large diameter for cleaning wheel mounting surface
- Ideal for European lug bolt hub cleaning
- 160mm x 65mm diameter
- 1/2" impact rated
- Strip-Away style abrasive ensures long life and durability
- Springlock release makes changing pads effortless
- 1/2" square drive replacement strip disk available (37355)



Ascot No.	Mfg. No.	Description
402-37350	37350	Impact Wheel Hub Cleaner
402-37351	37351	Wheel Hub Cleaner Disc
402-37355	37355	Wheel Hub Cleaner Strip Disc

NEW

402-37350

www.ascotsupply.com

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



### PROFESSIONAL STUD/HUB BRUSH KIT

- Ideal for hub and stud cleaning job with ease • **QUICK AND EASY:** Change brushes in seconds • Includes a 1/2" drive adapter
- Powered by a cordless drill • Replacement brushes available



QUICK & EASY TO USE



Ascot No. Mfg. No. Description

#### REPLACEMENT COMPONENTS FOR STUD/HUB BRUSH KIT

402-32611	203611-ASC	Plastic Hub/Stud Tool & Adapter
402-32613	203613-ASC	4-Pack of Replacement 14mm Stud Brushes
402-32614	203614-ASC	4-Pack of Replacement 22mm Stud Brushes
402-32615	203615-ASC	4-Pack of Replacement Passenger Hub Brushes
402-32616	203616-ASC	4-Pack of Replacement Truck Hub Brushes

Ascot No. Mfg. No. Description

402-32610	203610-ASC	Stud/Hub Brush Kit
-----------	------------	--------------------

### STUD CLEANING KIT

- Quickly and effectively clean rust and corrosion from wheel studs
- Manufactured from one single piece of anodized aluminum for increased durability
- Designed for use with Auto, Light Truck, SUV, Utility Trailers, Commercial Truck and Bus applications • Contains everything you need to clean a wide variety of wheels in one handy kit



#### KIT CONTAINS:

SBCT22 with a SBR22 brush  
Safety glasses  
2 adapters  
2 hex keys

**REPLACEMENT BRUSHES:** SBR 12,13,14,16, 18, 20 and 22mm

Ascot No. Mfg. No. Description

402-01322	SKT-1322	Stud Cleaning Kit
-----------	----------	-------------------

### HUB BUDDY TOOL

- **IMPACT RATED:** No need to change tools
- Complies with best practice R.I.S.T. procedure • Removes rust, corrosion and other build-up from wheel stud, drums and tire rim • Helps proper torque of lug nuts by removing corrosion
- A must for easy and accurate tire balancing • **INCLUDES:** 1 Hub Buddy XL attachment and 1 cleaning disc head • Replacement cleaning discs available in packs of 6 (Product # 402-37335)



402-37335

Ascot No. Mfg. No. Description

402-37330	37330	Hub Buddy Tool
402-37335	37335	2" Hub Buddy Tool Replacement Pads
402-37340	37340	1-1/2" Hub Buddy Tool Replacement Pads

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com



## STUD & HUB CLEANING TOOLS



### CRIMPED ENCAPSULATED WIRE WHEELS

- Elastomer gradually wears exposing consistent short trim for maximum aggression and long life

Ascot No.	Mfg. No.	Size	Width/ Face	Arbor	Fill Wire	Wire Dia.	Trim Length	RPM
535-14164	14164	3"	1/4"	1/2"	Steel	0.0118"	1"	20,000
535-14181	14181	3"	1/4"	1/2"	Steel	0.014"	1"	20,000



535-14164



535-14181



535-14174



535-14177

### KNOTTED END AND POWER BRUSHES

- Features a hollow end and heavy duty brushing action with some flexibility
- Ideal for more demanding cleaning applications in recessed areas

Ascot No.	Mfg. No.	Style	Size	Width/ Face	Arbor	Fill Wire	Wire Dia.	Trim Length	RPM
535-14174	14174	Single Row Knotted Wire Cup Brush	3-1/4"	3/8"	1/4" Shank	Steel	0.014"	5/8"	25,000
535-14177	14177	Twist Knot Brush	4"	1/2"	1/2"- 3/8"	Steel	0.020"	7/8"	25,000
535-14178	14178	Knotted End Brush	3"	3/8"	1/2"- 3/8"	Steel	0.014"	5/8"	25,000



535-14178

### 3" - 10" POWER BRUSHES

- Provide heavy duty brushing action with some flexibility
- Ideal for demanding cleaning applications on somewhat irregular surfaces

Ascot No.	Mfg. No.	Style	Size	Width/ Face	Arbor	Fill Wire	Wire Dia.	Trim Length	RPM
535-14165	14165	Twist Knot	3"	3/8"	1/2"-3/8"	Steel	0.014"	5/8"	25,000
535-14170	14170	Mounted Knot	3-1/4"	3/8"	1/4" Shank	Steel	0.014"	5/8"	25,000
535-14171	14171	Twist Knot	4"	1/2"	1/2"-3/8"	Steel	0.0118"	7/8"	25,000
535-14172	14172	Twist Knot	4"	1/2"	1/2"-3/8"	Steel	0.014"	7/8"	25,000
535-14173	14173	Twist Knot	4"	1/2"	5/8"-1"	Steel	0.020"	7/8"	25,000
535-14175	14175	Twist Knot	4"	1/2"	1/2"-3/8"	Steel	0.020"	7/8"	25,000
535-14176	14176	Cable Twist Knot	4"	1/4"	1/2"-3/8"	Steel	0.020"	7/8"	25,000
535-14179	14179	Cable Twist Knot	10"	1-3/4"	2"	Steel	0.023"	1-3/4"	4,500
535-14182	17682	Mounted Knot	3-1/4"	3/8"	1/4" Shank	Steel	0.020"	5/8"	25,000

535-14165

535-14171

535-14170

535-14172

535-14175

535-14173

535-14176

535-14182

535-14179

## HEAVY DUTY SERVICE EQUIPMENT



32225B

22 TON PIN STYLE  
JACK STANDS

46500

500 LB DPF/STEP  
HOUSING HANDLER

23221C

22 TON AIR/HYD  
AXLE JACK

23222C

22 TON LOW PROFILE  
AIR/HYD AXLE JACK

25057

5 TON MAGICLIFT™  
HYDRAULIC  
SERVICE JACK

25107

10 TON MAGICLIFT™  
HYDRAULIC  
SERVICE JACK

32105B

10 TON PIN STYLE  
JACK STANDS

32107B

10 TON HIGH LIFT  
JACK STANDS

34100

10 TON AIR JACK/  
SUPPORT STAND

43000

1½ TON FLOOR  
STYLE HYDRAULIC  
TRANSMISSION JACK

HW93806



3 TON ENGINE CRANE

HW93776



3 TON ENGINE STAND






## BOTTLE JACKS

WELDED  
BASECHROME  
MAIN  
RAM301-76312  
12-Ton Air/  
Hydraulic  
Bottle Jack

### 12 AND 20-TON CAPACITY AIR HYDRAULIC BOTTLE JACKS

- Fast efficient air pump reduces lifting time and has a built-in relief mechanism which prevents the jack from being used beyond its maximum capacity
- Convenient push button air valve connected to an in-line filter prevents contaminants from entering the air/hydraulic system
- Unique design allows for manual operation when air is not available
- Two piece zinc plated handle
- Parkerized coating on pump piston, extension screw and extension adapters and chrome coated ram offer protection against rust
- Longer wear life due to internally machined oil passages, smooth bearing surfaces and close tolerances
- Safety oil by-pass system prevents the ram from being overextended and causing damage to the cylinder

Ascot No.	Mfg. No.	Capacity	Min. Height	Max. Height	Lifting Handle
301-76312	76312A	12-Ton	9-15/16"	19-3/4"	23.5"
301-76320	76320A	20-Ton	10-7/8"	20-1/2"	23.5"
301-76720	76720A	12-Ton	8-1/4"	14-1/2"	23.5"
301-76721	76721A	20-Ton	7-3/4"	11-3/4"	23.5"

### 12 AND 20-TON CAPACITY BOTTLE JACKS

HEAVY  
DUTY

### 12 AND 20-TON CAPACITY BOTTLE JACKS

- For heavy duty truck, agriculture, construction, mining, mobile home, oil field, automotive, and marine applications where lifting, pushing, spreading, bending, pressing, or straightening are required
- Two-piece zinc plated handle
- Prevent rust with "Parkerized" pump piston, ram and extension screw
- No leak "Uniwell" construction
- Longer wear life due to internally machined oil passages, smooth bearing surfaces and close tolerances
- State of the art design reduces repair time
- 50% safety overload factor
- Lightweight forged base provides more steel only where strength is required
- The heavy-duty extension screw and release valve were designed to eliminate parts and reduce the chances of breakage and excessive wear
- Safety bypass and overload systems prevent cylinder damage and prevent the jack from being used beyond the ASME/PASE load-limiting standard
- Carrying Handles

Ascot No.	Mfg. No.	Capacity	Min. Height	Max. Height	Lifting Handle
301-76412	76412B	12-Ton	9-7/16"	18-7/8"	Yes
301-76512	76512B	12-Ton	6-11/16"	13-3/16"	Yes
301-76520	76520A	20-Ton	10-13/16"	20-3/16"	Yes
301-76820	76820A	20-Ton	8-1/4"	14-15/16"	Yes

## OMEGA LIFT

### AIR-ACTUATED & MANUAL HYDRAULIC BOTTLE JACKS

- Effortless air operation will greatly reduce operator fatigue and speed up the efficiency of garage work
- The motor is equipped to raise the load to the desired height efficiently, effortlessly and safely
- A compact, yet powerful Air Turbo
- All air bottle jacks come with chrome plated rams
- Versatile "Quick Connector" design provides for easy removal of air hose from air motor allowing compact storage or remote operation

Ascot No.	Mfg. No.	Cap.	Min. Height	Max. Height	Hyd. Height	Ext. Screw	Base Size	WT. (Lb.)
301-18126	18126C	12-Ton	9-5/8"	18-7/8"	5-1/2"	6"	8" x 5-1/4"	27
301-18204	18204C	20-Ton	10"	18-3/4"	4-7/8"	3-7/8"	8-1/2" x 7-1/8"	34
301-18206	18206C	12-Ton	9-5/8"	19"	5"	6"	9" x 7"	37
301-18209	18209B	20-Ton	8"	15-1/2"	4-1/8"	3-1/4"	8-1/2" x 7-1/4"	37
301-18302	18302C	30-Ton	11"	18"	7"	N/A	10-1/4" x 8-1/4"	63
301-18502	18502	50-Ton	12"	19"	7"	n/a	10-7/8" x 7-3/8"	134-1/2
301-18992	18992	100-Ton	11-7/8"	17-7/8"	6"	n/a	12-3/4" x 9-3/8"	220-1/2

301-18204  
20-Ton Air/  
Manual  
Hydraulic  
Bottle JackEFFORTLESS  
AIR  
OPERATION

### HYDRAULIC SIDE PUMP BOTTLE JACKS

- Hydraulic system is protected from internal damage by a patented bypass mechanism
- Machined and polished cylinders with die-cut threads provide non-abrasive leak-free, durable performance
- Fabricated from hard-cast steel with heat-treated critical stress areas
- Unique cross-type forged release valve assures positive control
- A wide, rugged base provides stability and strength

Ascot No.	Mfg. No.	Capacity	Min. Height	Max. Height	Hyd. Height	Ext. Screw	Base Size	Wt. (Lbs.)
301-10125	10125B	12-Ton	9-1/2"	18-5/8"	6"	3-1/8"	6" x 5-3/8"	18
301-10129	10129B	12-Ton	6"	10-5/8"	3"	1-5/8"	6" x 5-3/8"	14
301-10205	10205B	20-Ton	9-1/2"	18-5/8"	6"	3-3/8"	6-3/8" x 5-7/8"	28
301-10209	10209B	20-Ton	6-1/2"	11-1/4"	3-1/8"	1-5/8"	6-3/8" x 5-7/8"	21
301-10300	10300	30-Ton	11"	18"	7"	n/a	8-1/8" x 6-7/8"	56
301-10500	10500	50-Ton	9-1/2"	13-7/8"	4-3/8"	n/a	10-3/4" x 7-5/8"	103-1/2



301-10125

301-10205

### HYDRAULIC IN-LINE BOTTLE JACKS

- Heat-treated extension screw allows low pick-up height adjustment and maximum lift height
- Easiest accessible pumping system eliminates off-center pumping force for the most efficient operation
- A wide, rugged base provides stability and strength
- U.S. Patented built-in by-pass device protects hydraulic system from over pumping damage
- Unique cross-type forged release valve assures positive control

Ascot No.	Mfg. No.	Capacity	Min. Height	Max. Height	Hyd. Height	Ext. Screw	Base Size	Wt. (Lbs.)
301-10120	10120	12-Ton	9-1/2"	18-5/8"	6"	3-1/8"	7" x 4-1/4"	19-1/2
301-10200	10200	20-Ton	9-1/2"	18-5/8"	6"	3-1/8"	7-3/4" x 5"	27
301-10208	10208	20-Ton	6-1/2"	11-1/4"	3-1/8"	1-5/8"	7-3/4" x 5"	22



301-10120

301-10208

## BOTTLE JACKS ➔



301-02201

301-01220

301-01201

### 12 AND 22-TON CAPACITY LOW FORGED STEEL BASE BOTTLE JACKS

- Welded steel construction throughout • reduces metal fatigue allowing for longer use life
- Unique base forging method increases resistance to high pressure and gives a degree of durability
- Needle valve allows for controlled lowering of the ram
- Special type of steel resists rust
- Casing, cylinder and base are joined by electric welding for greater strength and are leak proof
- Heat treated extension screw provides low pickup height adjustment, maximum lift height and extra strength

Ascot No.	Mfg. No.	Capacity	Min. Height	Max. Height	Ram Lift	Screw Ext.	Base Size	Ship Wt.
<b>STANDARD</b>								
301-01220	ZN-12	12-Ton	9-1/2"	18-1/2"	5-7/8"	3-1/8"	4-1/8" x 6-1/2"	18 Lbs.
301-02200	ZN-22	22-Ton	10-5/8"	20-1/8"	6-1/4"	3-1/4"	5" x 7-1/8"	30 Lbs.
<b>LOW</b>								
301-01201	ZNB-12	12-Ton	6-3/4"	13-3/8"	3-3/4"	3"	4-1/8" x 6-1/2"	15 Lbs.
301-02201	ZNB-22	22-Ton	7-1/8"	12"	3-3/8"	1-1/2"	5 x 7-1/8"	27 Lbs.

### 2 TO 30-TON CAPACITY BOTTLE JACKS

- All models have a chrome main ram and a chrome pump piston
- The extension screws have a pressed thread
- These units can be used horizontally and vertically

Ascot No.	Mfg. No.	Capacity	Min. Height	Max. Height	Ext. Screw
301-41020	G410200	2-Ton	6-1/4"	11-3/4"	2"
301-41040	G410400	4-Ton	7-1/2"	14-1/2"	2"
301-41060	G410600	6-Ton	7-3/4"	14-3/4"	2"
301-41080	G410800	8-Ton	9"	18"	3-1/4"
301-41150	G411500	15-Ton	9-3/4"	19-1/4"	3-1/4"
301-41200	G412000	20-Ton	9-1/2"	18-1/2"	3-1/4"
301-41201	G412001	20-Ton Short	6-1/2"	11-1/4"	1-1/2"
301-41300	G413000	30-Ton	9-1/2"	18-1/2"	3"

### 20-TON AIR/HYDRAULIC BOTTLE JACK

- Unit includes a welded base to prolong service and return springs
- Chrome main ram and aluminum air motor guarantee optimum lifetime
- Air filter, connected to hose, included

Ascot No.	Mfg. No.	Capacity	Min. Height	Max. Height	Ext. Screw
301-43220	G432020	22-Ton	9-3/4"	18-1/2"	3-1/4"

301-43220

20-Ton Air/Hydraulic Bottle Jack



www.ascotsupply.com

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### 12 AND 20-TON SHORT WELDED BOTTLE JACKS

- Welded cylinder and reservoir for added strength and durability
- Chrome plated rams to resist rust and wear
- Built-in bypass device to protect hydraulic system from over pumping damage



301-61124

301-61200



301-61120

### 12 AND 20-TON IN-LINE WELDED BOTTLE JACKS

- Welded cylinder and reservoir for added strength and durability
- Chrome plated rams to resist rust and wear
- Built-in bypass device to protect hydraulic system from over pumping damage

### BOTTLE JACK SPECIFICATIONS

Ascot No.	Mfg. No.	Capacity	Min. Hgt.	Max. Hgt.	Overall Length	Overall Width	Saddle Diameter	Shipping Weight
301-61200	61200	20 Tons	10-1/2"	20-1/2"	7-1/2"	5-1/8"	1-3/4"	28.1 lb.
301-61120	61120	12 Tons	9-3/8"	18-5/8"	6-1/2"	4-3/8"	1-1/2"	18.9 lb.
301-61124	61124	12 Tons	6-3/4"	13-3/8"	6-1/2"	4-3/8"	1-1/2"	15.4 lb.

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com





## BOTTLE JACKS ➔

### PREMIUM AIR/HYDRAULIC BOTTLE JACK

- Chromed ram and aluminum air motor piston for longer life
- Heavy duty return springs
- Each unit factory tested at 150% overload
- **CAPACITY:** 20-Ton
- **MIN. HEIGHT:** 9.7" (24.5 cm)
- **MAX HEIGHT:** 18.5" (46 cm)
- **WEIGHT:** 38 lbs. (17.5 kg)
- Internal limiting washer installed to prevent side loading of the cylinder
- In-line regulator for continuous optimal air pressure
- Improved ergonomic handle
- Flexzilla style hose for maximum durability

301-14455



Ascot No.	Mfg. No.	Description
301-14455	14455	Premium Air/Hydraulic Bottle Jack

### TITAN AIR/HYDRAULIC BOTTLE JACKS

- **Cylinder is welded to the base, assuring strength and eliminating leaks**
- Chromed pump piston and ram for added rust resistance
- Extension screw gives added height when necessary
- Super low minimum height for easy access

Ascot No.	Mfg. No.	Cap.	Min. Height	Max. Height	WT. (LB.)
301-14460	14460	20-Ton	9-3/4"	18-1/2"	38
301-14461	14464	20-Ton	5/8"	10"	21
301-14475	14475	30-Ton	11"	18"	60
301-14480	14480	50-Ton	12"	19"	138

301-14460



### TITAN 20-TON SHORT AIR/HYDRAULIC BOTTLE JACK

- **Cylinder is welded to the base, assuring strength and eliminating leaks**
- Chromed pump piston and ram for added rust resistance
- Extension screw gives added height when necessary
- Super low minimum height for easy access
- Meets ANSI/ASME PALD & CE/GS standards
- **MEASUREMENTS (L X W X H):** 13" x 5" x 6"
- **MIN. HEIGHT:** 5.8" (148mm)
- **MAX HEIGHT:** 10" (256mm)
- **WEIGHT:** 9.5 kg/21 lb.

301-14461



Ascot No.	Mfg. No.	Description
301-14461	14461	Titan 20-Ton Short Air/Hydraulic Bottle Jack

[www.ascotsupply.com](http://www.ascotsupply.com)

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



AMERICANFORGE&amp;FOUNDRY™

### 20 AND 30-TON CAPACITY SUPER DUTY AIR/HYDRAULIC BOTTLE JACKS

- Welded tank and frame for superior strength
- Thick base design provides the most stable lifting platform
- Dual return springs help provide controlled and easy descent
- Shielded release screw prevents accidental lowering
- Specially engineered air motor for consistent and reliable operation

301-05620

WELDED  
TANK &  
FRAMETHICK  
BASE  
DESIGN

301-05621



301-05630



### BOTTLE JACK SPECIFICATIONS

Ascot No.	Mfg. No.	Capacity	Min. Height	Max. Height	Lift	Base Size	Air Pressure	Air Inlet	WT. (Lbs)
301-05620	5620SD	20-Ton	10-37/100"	20-63/100"	6-19/50"	5-3/4" x 9"	110-120 PSI	1/4" NPT	45
301-05621	5621SD	20-Ton	7"	12-3/4"	3-7/20"	5-7/10" x 8-27/100"	110-120 PSI	1/4" NPT	36
301-05630	5630SD	30-Ton	10-47/50"	20-59/100"	5-91/100"	9-13/20" x 7-9/100"	110-120 PSI	1/4" NPT	65

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

[www.ascotsupply.com](http://www.ascotsupply.com)



## 20 AND 30-TON CAPACITY PRO SERIES AIR/HYDRAULIC BOTTLE JACKS

- Fully welded cylinder and frame provide superior strength and extended service life
- Extra thick jack base provides exceptional support and stability in severe conditions.
- Quick-connect feature on air valve allows easy disconnect/connection of air hose and more compact storage.
- Dust rings on the top of pump piston provide extra protection for the cylinder and extended service life.
- Chrome plated pump piston and ram for extra rust and corrosion resistance.
- Cast steel handle socket and linkage provide exceptional strength and durability



301-10381



301-10382



301-10383

EXTRA THICK BASE

### BOTTLE JACK SPECIFICATIONS

Ascot No.	Mfg. No.	Capacity	Min. Height	Max. Height	Lift	Base Size	Base Thickness	Air Pressure	Air Inlet	WT. (Lbs.)
301-10381	10381	20-Ton	10 in.	20 in.	6 in.	8.875" x 5.75"	1.25 in.	110-125 PSI	1/4 in. NPT	41 lbs.
301-10382	10382	20-Ton Shorty	7.125 in.	12.625 in.	3.25 in.	8.25" x 5.75"	1.25 in.	110-125 PSI	1/4 in. NPT	34 lbs.
301-10383	10383	30-Ton	10.875 in.	20 in.	6 in.	9.625" x 7.125"	1.5 in.	110-125 PSI	1/4 in. NPT	63 lbs.

[www.ascotsupply.com](http://www.ascotsupply.com)

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## BOTTLE JACKS



## JACK PLATES



### JACK PLATES

- SIZES AVAILABLE:** 12" x 12" x 1" and 18" x 18" x 1"
- 100-ton capacity for both sizes
- Provides stability to bottle jacks, hydraulic rams, jack stands and cribbing
- Non-skid surface
- Constructed of engineered thermoplastic material
- MADE IN THE USA**



NON-SKID SURFACE

Ascot No.	Mfg. No.	Description
309-12121	D1212	12" x 12" x 1" Jack Plate
309-18181	D1818	18" x 18" x 1" Jack Plate

### GRIP-IT SERIES JACK PLATES

- New pyramid surface on one side is designed to mate with Super Stacker Cribbing Blocks pyramid surface for secure, exact fit, as well as provide better grip onto uneven terrain in the field
- Provides increased stability and gripping surface
- Complies with OSHA regulation 29 CFR 1926.305
- Capacity: 100 tons
- Model 14503 bottom locking plate locks onto Super Stacking Cribbing, helping to secure the load while preventing the release of hazardous energy

Ascot No.	Mfg. No.	Type	Dimensions	Capacity	Wt. (Lbs.)
309-14500	14500	Standard Plate	12" x 12" x 2"	100-Ton	8.8.
309-14501	14501	Standard Plate	12" x 24" x 2"	100-Ton	17.8
309-24468	14468B	Standard Plate	24" x 24" x 2"	100-Ton	36.3
309-14503	14503	Bottom Locking Plate	27" x 24" x 2"	100-Ton	38.4

### TITAN JACK PLATES

- Each unit has non-skid surface to prevent jacks from sliding under wet or oily conditions
- Lightweight and easy to handle
- When it is necessary to provide a firm foundation, the base of the jack shall be blocked or cribbed



The Titan Jack Plate in use.

Ascot No.	Mfg. No.	Dimensions	Capacity	Wt. (Lbs.)
309-14464	14464	12" x 12" x 1"	50-Ton	5
309-14465	14465	12" x 12" x 1.5"	100-Ton	8
309-14466	14466	18" x 8" x 3"	200-Ton	21
309-14468	14468	24" x 24" x 2"	100-Ton	24
309-14472	14472	18" x 18" x 1"	50-Ton	15
309-14473	14473	18" x 18" x 1.5"	100-Ton	16
309-14462	14462	36" x 36" x 2.5"	150-Ton	118
309-14463	14463	36" x 36" x 3"	200-Ton	135
309-14469	14469	18" x 18" x 2"	100-Ton	20

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

[www.ascotsupply.com](http://www.ascotsupply.com)
309-12121  
12" x 12" x 1"  
Jack Plate

Fits over Super Stacker Cribbing Blocks

309-18181  
18" x 18" x 1"  
Jack Plate

309-14503



NON-SKID SURFACE



## SERVICE JACKS



### 20-TON AIR/HYDRAULIC BOTTLE JACKS

- Thick jack base provides exceptional support and stability in severe conditions
- Quick-connect feature on air valve allows easy disconnect and connection of air hose & more compact storage

301-20220



301-20221



### 22-TON AIR/HYDRAULIC TRUCK JACK

- Large air motor provides an exceptional quick lifting experience
- Narrow chassis fits between tandem truck wheels
- Comes with three adapters in different sizes that cater to different working requirements

302-19150



Ascot No.	Mfg. No.	Description	Min. Hgt.	Max Hgt.	Hyd. Lift Range	Exten. Screw	Chassis Size	Saddle Size	Handle Length	Ship Wt. (Lbs.)
301-20220	AS2022	20-Ton Air/Hydraulic Bottle Jack	10-1/8"	19-7/8"	6-1/2"	3-1/8"	N/A	N/A	9-3/8"	35.1
301-20221	AS2022S	20-Ton Short Air/Hydraulic Bottle Jack	7"	12-5/8"	3-3/8"	2-3/9"	N/A	N/A	9-3/8"	30.6
302-19150	AS1915	22-Ton Air/Hydraulic Truck Jack	10-1/2"	21-1/8"	6-1/8"	4-1/2"	N/A	N/A	45-1/4"	101.9

### 20-TON CAPACITY AIR/HYDRAULIC SERVICE JACK

- Compact, powerful design quickly lifts rated capacity
- Large 8" rubber wheels
- Low height allows lifting from axle or suspension
- Pressure relief valve prevents overloading
- Rapid two-speed air hydraulic action quickly advances ram to load
- Chrome plated plunger for extended jack life
- Optional height adapters HW93265
- 2 Year Warranty

Ascot No.	Mfg. No.	Capacity	Min. / Max. Height	Power Raise	Handle Length	Base Size	EXT. Screw	Operating Pressure	Wt. (Lb.)
302-93733	HW93733	20 Tons	9" / 19-3/4"	6"	52-1/2"	8" x 17"	4-3/4"	110-140 PSI	88-1/2



302-93733

### 20-TON TITAN AIR/HYDRAULIC CART JACK

- 20-ton capacity with welded steel base
- Chromed ram and aluminum air motor for long life
- Heavy duty return springs
- Each unit factory tested at 150% overload
- 36" long handle allows for easy placement of jack under vehicle

Ascot No.	Mfg. No.	Capacity	Min. Hgt. / Max. Hgt.	Handle Length	Wt. (Lb.)
302-14470	14470	20 Tons	10" x 19"	36"	55

302-14470  
20-Ton Titan  
Air/Hydraulic  
Cart Jack

### 20-TON AIR/HYDRAULIC SERVICE JACKS WITH CART

- Unit includes a welded base to prolong service
- Chrome main ram and aluminium air motor guarantee optimum lifetime
- Air filter, connected to hose, included
- Comes on trolley

Ascot No.	Mfg. No.	Capacity	Min. Height / Max. Height
302-43202	G432003	20 Tons	10" / 18-1/2"

302-43202  
20-Ton Air/  
Hydraulic Service  
Jack with Cart

### 20-TON CAPACITY AIR OPERATED HYDRAULIC FLOOR JACKS

- Intended for heavy duty truck, agricultural and heavy construction equipment
- Designed for use on mobile service trucks
- Long handle with 45-1/2" reach helps in positioning of jack under vehicles with low overhang
- Removable handle for shipment or storage
- Hand grip also works as a stand to store the jack in a vertical position
- Compact design fits easily between tandem wheels
- Fast efficient air pump reduces lifting time and has a built-in relief mechanism which prevents the jack from being used beyond its maximum capacity

Ascot No.	Mfg. No.	Capacity	Min. Height	Max. Height	Wt. (Lbs.)
302-72081	72080A	20-Ton	11-1/8"	28-5/8"	70
302-72091	72090A	20-Ton	8-5/5"	22-3/4"	63



302-72091  
20-Ton Capacity  
Air Operated  
Hydraulic  
Floor Jacks

## SERVICE JACKS



### 22-TON CAPACITY AXLE JACK

- Heat treated cylinder wall & chromed piston give added stability & longer jack life
- Alloy steel lifting mechanism for added durability and operator safety
- Precision engineered tolerances for maximum performance
- In-line filter to protect air motor from contaminants
- Corrosion-resistant aluminum

- and nylon composite air motor
- Ram extension kit included with 3/4", 2-3/4" and 4" extensions
- Large 7-3/4" rear wheels for easy positioning
- Automatic in-line oiler to lubricate air motor
- Grommet retainers-no need for clevis pins
- One-piece handle

Ascot No.	Mfg. No.	Capacity	Min. / Max Hgt.	RAM Lift	Reach	Width	Wt. (Lb.)
302-56501	565E1	22 Tons	8-3/4" x 21-1/2"	4-3/4"	61"	13"	107



### 22-TON CAPACITY AIR/HYDRAULIC FLOOR JACKS

- Long "T" handle helps in positioning jack under vehicles with low overhang
- Jack load release top mounted at "T" handle and allows operation at any handle position
- Handle locking lever secures handle in either vertical, horizontal or 45° position
- Compact design fits easily between tandem wheels
- Rust inhibitive coating on ram and extension screw
- Large diameter wheels for easy maneuverability
- Self-retracting ram eliminates manual lowering of jack
- Includes 3-piece extension set

Ascot No.	Mfg. No.	Capacity	Min. Height	Max. Height	Ext. Screw	Wt. (Lbs.)
302-72200	72200D	22-Ton	9"	18"	—	102
302-00224	ZATJ-22S-4	22-Ton	8"	15-7/8"	3-5/8"	82
302-23221	23221C	22-Ton	9-3/4"	23-5/8"	3-7/8"	100



302-56501

CHROMED PISTON

HEAT TREATED CYLINDER WALL



### 35-TON CAPACITY SERVICE JACK

- Carries a very wide hydraulic cylinder and three heavy duty wide adaptors to give it stability when lifting loads that tend to shift
- Solid base makes the new jack very durable and safe to operate
- Provides a low minimum height facility enabling clearance on vehicles with low suspension
- Three adaptors as options this product is able to lift high trailer assemblies loaded or unloaded without issue
- Recommended for carrying out up to a minimum of 30,000 lifts without fail
- 3 Year Warranty

Ascot No.	Mfg. No.	Capacity	MIN. / MAX. HGT.	Wt. (Lb.)
302-03531	GT-3531	35 Tons	7-9/32" / 16-11/16"	93



### 24-TON CAPACITY SERVICE JACK

- This single stage air service jack delivers 24 Tons of lifting power
- It is designed to meet and exceed the expectations of a quality jack at a very competitive price
- The G432024 comes equipped with an extension screw, individual extension pegs, and heavy duty wheels designed for daily use

Ascot No.	Mfg. No.	Description
302-43222	G432024	24-Ton Service Jack



### 25-TON BLACKHAWK PLATINUM AIR/HYDRAULIC JACK

- Chrome-plated ram
- Improved bearing surfaces
- High cycle durability
- Long life seals
- High/low temp functionality
- 5-year warranty with electronic registration
- Made in Taiwan

Ascot No.	Mfg. No.	Capacity	Min. Height	Max. Height	Saddle Extensions
302-00225	BP225	25 Tons	9-5/32"	22" w/ Ext.	1", 2.5", 6" & 7"

### HANDLE PROTECTORS

- Made of a durable synthetic rubber
- Fits multiple jack manufacturers' handles and popular tire tools
- Unique design ensures a tight fit on jack/tool handle without slippage
- Protects vehicles from scratches or dents caused by falling jack handles and unstable tools in the shop
- Patent Pending design absorbs the dent/scratch-causing force as the handle contacts an adjacent vehicle

Ascot No.	Mfg. No.	Description
448-01101	GHP-01 B	Black Handle Protector
448-01102	GHP-01 Y	Yellow Handle Protector
448-01103	GHP-01 R	Red Handle Protector



WIDE HYDRAULIC CYLINDER

THREE HD WIDE ADAPTORS

302-03531

302-43222

302-00225

DURABLE SYNTHETIC RUBBER

448-01101

448-01102

448-01103





## SERVICE JACKS

### 2, 3, 5, 10 & 20-TON CAPACITY FLOOR SERVICE JACKS

- Steel hydraulic block assembly includes dust seals to prevent oil contamination
- 5, 10 & 20-ton capacity jacks have one-pump to load feature
- Long, removable two-piece handle
- Safety bypass system protects cylinder
- Safety overload system prevents jack from being used beyond rated capacity
- 5, 10 and 20-ton floor jacks feature a US patented one pump to load ability, reducing lift time dramatically. 71202A takes 10 pumps to full rise under load
- 71202A features nylon wheels to protect epoxy and tile floors

Ascot No.	Mfg. No.	Capacity	Min. / Max. Hgt.	Handle Length	Wt. (Lb.)
302-71000	71000D	10 Tons	6-1/2" / 27-1/4"	46-3/4"	455
302-71100	71100A	10 Tons	6-1/2" / 27-1/4"	46-3/4"	466
302-71203	71203	3 Tons	3-1/5" / 20-3/8"	40"	112
302-71233	71233A	2 Tons	2-3/4" / 20"	50-1/4"	92
302-71331	71331	3 Tons	3-3/4" / 19"	48"	59
302-71335	71335	3-1/2 Tons	4" / 21-3/8"	48"	106
302-71500	71500G	5 Tons	6-1/4" / 27-1/4"	42-1/2"	119
302-71550	71550G	5 Tons	6-1/4" / 26-1/4"	45"	270
302-72220	72220A	20 Tons	6-1/2" / 26-1/4"	45"	650
302-72230*	72230A	20 Tons	6-1/2" / 26-1/4"	45"	670



### 30, 50 AND 55-TON CAPACITY AIR / HYDRAULIC TELESCOPIC FLOOR JACKS

- Long "T" handle for positioning jack under vehicles with low overhang
- Low profile
- Handle locking lever secures handle in either vertical, horizontal or 45° position
- Safety overload system prevents cylinder damage
- Rust inhibitive coating on rams
- Integrated filter protects air motor
- Double acting pump raises ram more quickly to the load
- Suspension loaded axle prevents wheel damage
- Made in Italy

Ascot No.	Mfg. No.	Capacity	Min. / Max. Height	Stroke	Chassis Size	Wheel Diam.	PSI Range	Wt. (Lb.)
302-72212	72212	55 Tons	5.9" / 15.4"	9.5"	8.6" x 39.3"	7"	100-175	233
302-72218	72218	33 Tons	5.9" / 12.71"	7.3"	8.5" x 49.2"	8-1/2"	120-175	106
302-72225	72225	50 Tons	8.7" / 16.6"	7.9"	8.6" x 39.3"	7"	120-175	235



HANDLE  
LOCKING  
LEVER

LONG  
T-HANDLE



### YAK 2 STAGE 44/22 TON AIR HYDRAULIC HD JACK

- Air hydraulic jack for heavy vehicles, practical and easy to handle
- The pistons move back automatically; the two descent valves guarantee perfect holding in all situations and controlled speed under load
- Ideal for workshops, mobile workshops, tire repairers and bodywork shops
- Working air pressure: 116-145 PSI

Ascot No.	Mfg. No.	Capacity	Min. / Max. Hgt.	Wt. (Lb.)
302-92003	92003	44/22-Ton	5.91" / 11.82"	86 lbs.

### YAK 2 STAGE 66/33 TON AIR HYDRAULIC JACK

- Air hydraulic jack for heavy vehicles, practical and effective
- The pistons move back automatically; the two descent valves guarantee perfect holding in all situations and controlled speed under load
- A complete range of jacks for all stroke and capacity requirements
- Ideal for workshops, mobile workshops, tire repairers and bodywork shops
- Working air pressure: 116-145 PSI

Ascot No.	Mfg. No.	Capacity	Min. / Max. Hgt.	Wt. (Lb.)
302-92006	92006	66/33-Ton	8.66" / 17.72"	157 lbs.

### YAK 3 STAGE 66/33/17 TON AIR HYDRAULIC JACK

- Air hydraulic jacks with pistons moving back automatically.
- Specifically designed for lifting buses and all vehicles with low profile axles
- Working air pressure: 116-145 PSI

Ascot No.	Mfg. No.	Capacity	Min. / Max. Hgt.	Wt. (Lb.)
302-92007	92007	66/33/17-Ton	5.31" / 10.05"	110 lbs.





## SERVICE JACKS →

### YAK 22/11-TON STANDARD AIR/ HYDRAULIC JACK

- Extremely light, compact and efficient
- Made up with the best materials on the market
- Models 92000 and 92001 represent the technological leading edge of our product range
- Included are 0.5" | 12.7 mm and (2) 2.35" | 60 mm Extensions
- Stroke: 6.5"
- Air Pressure: 116-145 PSI
- Min. Height: 5.5", Max. Height: 12.05"
- Weight: 38.5 Lbs.

MADE IN ITALY

Ascot No.	Mfg. No.	Description
302-92000	92000	22/11-Ton Standard Air Hydraulic Jack

### YAK 44/22-TON AIR/ HYDRAULIC HD JACK

- Air hydraulic jack for heavy vehicles, practical and easy to handle
- The pistons move back automatically; the two descent valves guarantee perfect holding in all situations and controlled speed under load
- Ideal for workshops, mobile workshops, tire repairers and bodywork shops
- Stroke: 6"
- Air Pressure: 116-145 PSI
- Min. Height: 8.54", Max. Height: 18.38"
- Weight: 101 Lbs.

MADE IN ITALY

Ascot No.	Mfg. No.	Description
302-92004	92004	44/22-Ton Air/Hydraulic HD Jack

### YAK 4 STAGE 88/55/28/17-TON AIR/HYDRAULIC JACK

- Air hydraulic jack for heavy vehicles, practical and effective
- The pistons move back automatically; the two descent valves guarantee perfect holding in all situations and controlled speed under load
- A complete range of jacks for all stroke and capacity requirements
- Ideal for workshops, tire repairers and bodywork shops
- Stroke: 11"
- Air Pressure: 116-145 PSI
- Min. Height: 7.09", Max. Height: 18.89"
- Weight: 170 Lbs.

MADE IN ITALY

Ascot No.	Mfg. No.	Description
302-92010	92010	4 Stage 88/55/28/17-Ton Air/Hydraulic Jack


[www.ascotsupply.com](http://www.ascotsupply.com)
**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

### AC HYDRAULIC 25/10-TON TWO-STAGE HYDRAULIC JACK

- Versatile 2-stage air hydraulic jack for buses and trucks • **MINIMUM HEIGHT:** 7.20" • Designed for heavy duty, intensive commercial use • Built-in safety overload valve • Hand-operated dead-man's control for optimum safety while lifting and lowering • Hard chromium plated piston rod for long life • 25-2TH model with telescopic handle increasing the reach under the vehicle to 83.58" ensuring safe and easy operation • *With 2 extensions (1.97"/3.94")*



Ascot No.	Mfg. No.	Description
302-00252	25-2	25/10-Ton Two-Stage Hydraulic Jack

### AC HYDRAULIC 50/25-TON TWO-STAGE HYDRAULIC JACK

- 2-stage air hydraulic jack for heavy buses and trucks • **MINIMUM HEIGHT:** 8.66" (220 mm) • Designed for heavy duty, intensive commercial use • Built-in safety overload valve • Hand-operated dead-man's control for optimum safety while lifting and lowering • Hard chromium plated piston rod for long life • 50-2TH model with telescopic handle increasing the reach under the vehicle to 85.43" (2170 mm) ensuring safe and easy operation • *With 2 extensions (1.97"/3.94")*



Ascot No.	Mfg. No.	Description
302-00502	50-2	50/25-Ton Two-Stage Hydraulic Jack

### AC HYDRAULIC 50/25/10-TON THREE-STAGE HYDRAULIC JACK

- 3-stage air hydraulic jack for high clearance vehicles • **MINIMUM HEIGHT:** 8.66" (220 mm) and **HIGH MAXIMUM HEIGHT:** 22.05" (560 mm) • Designed for heavy duty, intensive commercial use • Built-in safety overload valve • Hand-operated dead-man's control for optimum safety by lifting and lowering • Hard chromium plated piston rod for long life • 50-3H model with telescopic handle increasing the reach under the vehicle to 85.23" (2165 mm) ensuring safe and easy operation • *For safety reasons extensions are not included*



Ascot No.	Mfg. No.	Description
302-00503	50-3	50/25/10-Ton Three-Stage Hydraulic Jack

### 40-4 40-TON LOW PROFILE FOUR-STAGE AIR/ HYDRAULIC JACK

- The lowest jack on the market with a minimum height of only 3.94" • Telescopic cylinders ensure a fast and safe 4-stage lift • Compact and short chassis for even the lowest vehicles • Hand-operated dead-man's control for optimum safety while lifting and lowering • Ergonomic handle with push buttons • *Includes 2 extensions (1.97"/3.94 in)*



Ascot No.	Mfg. No.	Description
302-00404	40-4	40-Ton Low Profile Four-Stage Air/Hydraulic Jack

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

[www.ascotsupply.com](http://www.ascotsupply.com)



## SERVICE JACKS

**HEIN-WERNER  
AUTOMOTIVE**

### 25-TON TRUCK JACKS

- Compact, powerful design quickly lifts rated capacity
- 8-1/4" low height allows lifting from axle or suspension
- Pressure relief valve prevents overloading
- Specially coated ram prevents rust and extends jack life
- Air assisted ram retract



Includes 3"  
Extension

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt./ Max. Hgt.	Handle Length	Base Size	Ext. Screw	Wt. (Lb.)
302-93735	HW93735A	25-Ton	8-1/4" / 21-1/2"	53"	20"x14"	5-1/8"	124

### 45/20-TON 2-STAGE SERVICE JACK

- Provides an even lower minimum of under 6" to get under Buses, RV's, and Car Haulers
- Built-in air regulator and water separator prolong the life of the jacks
- Solid base makes the new jack very durable and safe to operate
- Long handle and truer balance makes it easy to maneuver under a vehicle
- 3 Year Warranty

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Wt. (Lb.)
302-04532	GT-4532	45/20	4-7/8" / 16-1/2"	99




### TITAN 22-TON AIR/HYDRAULIC SERVICE JACK

- Air operated & easy to maneuver
- Single piece handle - will not break
- Extension saddles include: (1 of each) 1", 2" and 4"
- Operates with only 80 psi of air pressure
- Min. height: 9" (185 mm)
- Stroke Length: 6" (15 cm)
- Weight: 90 lb. (41 kg)

Ascot No.	Mfg. No.	Description
302-14140	14140	Titan 22-Ton Air/Hydraulic Service Jack

302-14140

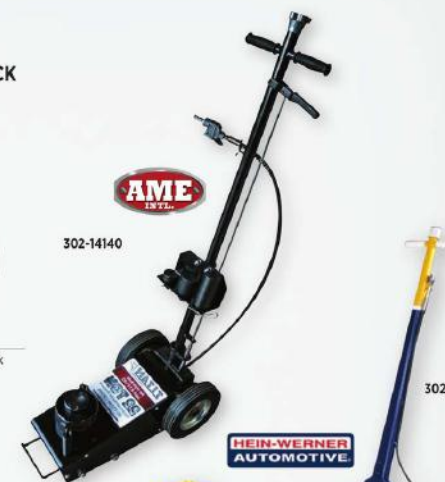

302-93662

### LONG CHASSIS HYDRAULIC JACKS

- Ideal for lifting heavy trucks, buses, agricultural and heavy construction equipment with hard to access lift points
- "T" handle with release knob for exact positioning of load
- Heavy gauge, sturdy frame helps prevent distortion or twisting
- Foot pedal operation provides quick, no load lifts to load point
- Long chassis for hard to reach points

Ascot No.	Mfg. No.	Capacity	Min. Hgt. / Max. Hgt.	Handle Length	Saddle Diam.	Wt. (Lbs.)
302-22050	22050C	5-Ton	7-1/4" / 27-1/4"	46"	6-1/2"	259
302-22051	22051C	5-Ton	7" / 27"	47-1/4"	5-7/8"	248
302-22100	22100C	10-Ton	6-7/8" / 27-1/2"	43"	7-1/4"	427
302-22101	22101C	10-Ton	6-3/4" / 27-1/4"	47-1/4"	7-1/4"	432
302-22201	22201	20-Ton	7-1/2" / 26"	48-1/2"	6"	543
302-93657	HW93657	4-Ton	5-1/2" / 26-1/2"	51-3/4"	7"	222
302-93667	HW93667	4-Ton	5-1/2" / 26-1/2"	51-3/4"	7"	237
302-93660	HW93660	10-Ton	6-1/2" / 25-1/2"	53"	8-1/2"	420
302-93662	HW93662	10-Ton	6-1/2" / 25-1/2"	53"	8-1/2"	430

302-22050



302-22051



302-93731

### 20-TON TRUCK JACKS

- Patented "Speed Pak" provides effortless lift
- Large rubber wheels enhance mobility
- Automatic valve prevents overloading
- Extension screw permits pickup height adjustment
- 2 Year Warranty

Ascot No.	Mfg. No.	Cap.	Min. Hgt. / Max. Hgt.	Power Raise	Handle Length	Base Size	Ext. Screw	Operating Pressure	Wt. (Lbs.)
302-93731	HW93731	20-Ton	9-3/8" / 17-5/8"	5-1/2"	50"	8" x 5-1/2"	2-1/2"	110-150 PSI	69



## JACK STANDS & VEHICLE STANDS



### HIGH TONNAGE JACKS

- Load blocking system • Remote control for working safely • Various extensions to suit all operations
- All models are hydro-pneumatically operated and equipped with a dual descent valve for greater control when bearing weight and automatic piston return • Can also be fitted with a manual emergency pump (on request) • Made in Italy



302-91000

LOAD  
BLOCKING  
SYSTEMREMOTE  
CONTROLDUAL  
DESCENT  
VALVE

### HIGH TONNAGE JUMBO JACKS

- Ideal for giant tire changing, mining, railroads, construction rigging • No need for cribbing - time savings! • Balanced for easy moving • Large pneumatic wheels • Only 23" wide, the jacks fit in tight spots • 50" long, 8 position handle for easy tilt back and moving of the jack • Welded fully enclosed heavy-duty steel frame with built in lifting holes
- Hydraulic radial piston pump • Minimum 90 to 150 psi air supply needed to power hydraulic pump • Extension holders bolted to frame for easy storage • Easy to change oil filter
- All Jacks come with 5" & 9" extensions & 1" saddle
- Made in Canada



308-10320

LARGE  
PNEUMATIC  
WHEELSHEAVY  
DUTY  
STEEL  
FRAME

The High Tonnage Jumbo Jack in use.

Ascot No.	Mfg. No.	Description	Capacity
302-91000	91000	High Tonnage Jack	25/50/80-Ton Stages
302-91001	91001	High Tonnage Jack	30/60-Ton Stages
302-91003	91003	High Tonnage Jack	50/80-Ton Stages
302-91004	91004	High Tonnage Jack	100-Ton
302-91005	91005	High Tonnage Jack	150-Ton

Ascot No.	Mfg. No.	Cap. (Tons)	Collapsed Point	Stroke	Lifting Height
308-10320	10320	150	27"	14-3/8"	41-3/8"
308-10321	10321	150	36"	22-3/8"	58-3/8"
308-10322	10322	100	27"	14-3/8"	41-3/8"
308-10323	10323	200	27"	14-1/2"	41-1/2"
308-10324	10324	250	27"	14"	41"



### 3, 6 & 12-TON JACK STANDS

- Heavy-duty jack stands that are suitable for emergency tire changes, repairs and more • Ratchet height adjustment built within column • Wide base for added stability • Multi-leveled ductile iron ratchet bar adds strength and durability • Sold in pairs of two

**NOW FEATURING A DOUBLE LOCK SAFETY PIN FOR ADDED SECURITY**

NOW  
WITH A  
DOUBLE  
LOCK PINWIDE  
BASE

### JACK STAND SPECIFICATIONS

Ascot No.	Mfg. No.	Capacity (Tons)	Base Size	MIN. Height / MAX. Height	Shipping Weight
302-51005	510005	10	16-7/32" x 16-7/32"	27-61/64" / 47-9/16"	123.2 lb.
302-63220	63220	22	9-7/8" x 9-7/8"	13-3/8" / 19-5/8"	63.3 lb.
302-63030	63030	3-Ton	7-5/8" x 6-7/8"	11" / 16-3/8"	14.9 lb.
302-63060	63060	6-Ton	11" x 9-3/4"	15-3/4" / 24-3/8"	32 lb.
302-63120	63120	12-Ton	11-3/4" x 10-5/8"	17-1/2" / 27-1/2"	56 lb.

### 10-TON HIGH JACK STANDS (PAIR)

- Pin-style stands with supporting range from 27.95" to 47.56" suitable for high-height applications
- Heavy-duty tubular steel design provides stability and rigidity
- Multiple pin holes to allow easy adjustment to desired height
- Saddle with lugs for easy positioning of the load • Sold and to be used only in pairs



302-51005

### 22-TON JACK STANDS

- Used in pairs for supporting trucks, trailers, and equipment in fleet garages, agricultural, industrial and construction environments • Sturdy, welded steel construction for exceptional safety and strength • Heavy gauge steel helps prevent distortion or twisting • Wide base for added stability • Multi-position iron column bar for convenient height adjustment • Sold in pairs of two



302-63220

Ascot No.	Mfg. No.	Description
302-63221	63220-1	Support Pin for 22-Ton Jack Stands



WINTEC



**302-45125**  
12-Ton Jack  
Stand with Pin  
and Wheels

## JACK STANDS & VEHICLE STANDS

### 12-TON JACK STAND WITH PIN AND WHEELS

- All stands have a heavy duty robot welded frame, and a multi-position ductile ratchet bar
- The quick adjustment mechanism securely locks into the right location
- Includes counter-weighted pawl for safe securing
- Capacity is per stand

Ascot No.	Mfg. No.	Cap.	Min. Hgt. / Max. Hgt.	Base Size	Wt./Pr (Lb.)
302-45125	G451205	12-Ton	11-4/5" / 18-1/10"	19"x19"	144

### UNDERHOIST STANDS

- Sturdy, welded steel construction for superior safety and strength
- Ideal to support the exhaust system, shock absorber and other vehicle components during an under vehicle repair - Not designed to support vehicle
- Acme screw allows for precise height adjustment

STURDY,  
WELDED  
STEEL

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Base Size	Saddle Size	Wt. (Lb.)
302-31500	31500	3/4	55" / 80"	12" Diameter	5-1/4" x 1-1/2"	33
302-31501	31501	3/4	55" / 80"	12" Diameter	5-1/4" x 1-1/2"	39
302-33020	33020	2	67" / 76-3/4"	23" x 18"	5-1/4" x 1-1/2"	53

### 20-TON CAPACITY TRAILER STABILIZING STANDS

- Meets OSHA requirements for supporting trailers when loaded or unloaded
- 14" diameter base provides maximum leveling stability
- Quick adjust spin handle for ease of turning
- Large diamond plate saddle to grip the load

Ascot No.	Mfg. No.	Desc.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Base Size	Saddle Size	Wt. (Lb.)
302-81022	81022A	US	20	39" / 50-5/8"	14" Diameter	4-1/2" x 5"	52
302-81122	81022AI	Import	20	39" / 50-5/8"	14" Diameter	4-1/2" x 5"	52

### 3/4 & 1-1/2-TON UNDER TRAILER HOIST STANDS

- Lightweight, slender design
- Quick adjust spin handle with thrust bearing eliminates wear and provides ease of turning load
- Foot pedal (81034A only) generates 1" additional stroke and 400 lb. of force at the saddle
- Pedal may be locked in vertical position for storage or shipment 1-1/4" diameter acme threaded screw has 26-1/4" travel

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Base Size	Saddle Size	Wt. (Lb.)
302-81033	81033A	3/4	55-1/4" / 81-1/2"	12" Diameter	1-5/8" x 5-1/4"	35
302-81034	81034A	3/4	55-1/4" / 81-1/2"	12" Diameter	1-5/8" x 5-1/4"	39
302-81035	81035A	1-1/2	48-7/8" / 85-3/8"	12"x12"x12"	3-1/4" x 3-1/4"	39.5

OMEGA LIFT



302-31500

302-31501

302-33020

norco



302-81022

302-81034

302-81035

www.ascotsupply.com

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

OMEGA LIFT

### 3, 6 AND 12-TON CAPACITY "RATCHET STYLE" STANDS

- Counter-weighted pawl serves as a safe, secure locking device to prevent the load from accidentally disengaging
- Sturdy, welded steel construction for superior safety and strength
- One piece, multi-position ductile ratchet bar provides super strength and durability, and quick adjustment mechanism that securely lock into desired location
- Sold and to be used only in pairs
- Capacity is per pair

Ascot No.	Mfg. No.	Capacity	Min. Hgt. / Max. Hgt.	Saddle Size	Base Size	Wt. (Lb.)
302-32035	32035B	3 Tons	11-384" / 17-1/4"	3-1/4" x 1-3/8"	7-3/4" x 6-3/4"	16
302-32065	32065B	6 Tons	10-1/2" / 24-1/8"	4" x 1-1/4"	10-1/8" x 9-1/2"	33
302-32125	32125B	12 Tons	17-3/4" / 27-5/8"	4" x 1-1/2"	10-3/4" x 12"	61



302-32035

OMEGA LIFT

### 7, 10 AND 22-TON CAPACITY PIN-STYLE JACK STANDS

- Sturdy, welded steel construction for superior safety and strength
- Heavy gauge, steel frame helps prevent distortion or twisting
- Sold and to be used only in pairs
- Capacity is per pair

Ascot No.	Mfg. No.	Capacity	Min. Hgt. / Max. Hgt.	Saddle Size	Base Size	Wt./Pr (Lb.)
302-32075	32075B	7 Tons	9-1/2" / 12-1/4"	3-1/2" x 2-3/8"	8-1/2" x 8-1/2"	22
302-32105	32105B	10 Tons	18-5/8" / 31-1/8"	3-1/8" x 5"	16-1/8" x 15-5/8"	84
302-32107	32107B	10 Tons	28" / 47-5/8"	3-3/8" x 5"	16-1/4" x 46-1/4"	109
302-32225	32225B	22 Tons	12" / 19-5/8"	3-1/8" x 2-3/4"	9-7/8" / 9-7/8"	66

STURDY,  
WELDED  
STEEL

302-32225

norco

### 25-TON CAPACITY JACK STANDS

- Intended for fleet and maintenance garages where low profile stands are used to support loaded trailers
- Pin-type support column adjusts to four different height positions
- Adjustment pin is secured to stand to prevent loss
- Handle provides ease of positioning and carrying
- 3/8" thick solid steel base plate for stability

Ascot No.	Mfg. No.	Desc.	Capacity	Min. / Max Hgt.	Hgt. Intervals	Saddle Size	Base Size	Wt. (Lb.)
302-81225	81225	US	25 Tons	12" / 20"	3" x 3"	2-1/4" x 3-1/4"	10" x 10"	65
302-82225	81225i	Import	25 Tons	12" / 20"	3" x 3"	2-1/4" x 3-1/4"	10" x 10"	65

THICK  
SOLID  
STEEL  
BASE  
PLATE

302-81225



RAISED

LOWERED

ESCO

### 20-TON SCREW STYLE JACK STAND

- Screw-style stand makes it easy to hold load at desired height and secure with locking collar
- Adjustable screw for height extension and retraction
- Heavy duty design and application

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Base Thickness	Base Size	Wt. (Lb.)
302-10802	10802	20	16.5" x 26.5"	1/4"	13" x 13"	65
302-10803	10803	20	26" x 46"	1/4"	13" x 13"	82

SCREW  
STYLE

302-10803

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com



## JACK STANDS & VEHICLE STANDS



### 3 AND 6-TON JACK STANDS

- Saddle column provides ratchet action height adjustment • Dual purpose handle serves as carry handle and saddle column release • Multi position ratchet bar provides strength and durability • Formed base adds stability and helps reduce sinkage into pavement



Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Height Intervals	Saddle Size	Base Size	WT. (Lb.)
302-93503	HW93503	3	12-1/8" / 19"	5/8"	7-1/2" x 9"	1" x 4-1/2"	18.5
302-93506	HW93506	6	16-1/4" / 25-3/4"	5/8"	10-1/2" x 13"	1" x 5"	41

### 7-TON FORKLIFT STAND

- Low profile muscle work for forklifts and heavy machinery • Wide, square base for maximum load stability • Adjusts from 9-1/2" to 15-3/4" at 1" intervals • Heavy duty holding pins for adjustable heights • Lightweight for portability and ease of positioning



Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Height Intervals	Saddle Size	Base Size	WT. (Lb.)
302-93524	HW93524A	7	9-1/2" / 15-3/4"	1"	2-1/2" x 4-1/2"	7-1/2" x 7-1/2"	36

### 10-TON PIN-STYLE JACK STAND

- Ideal for fleet, agricultural and construction maintenance • Pin style column adjusts in 2" height intervals • Heavy duty square tubing • Large saddle securely supports load • Sold in pairs • Capacity is per pair



Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Base Size	WT. (Lb.)
302-93511	HW93511	10	30" / 52"	19" x 19"	148

### 10-TON JACK STANDS

- Ideal for fleet, agricultural and construction maintenance • Heavy duty pin style height adjustment • Wide, square tubing construction and base for maximum load stability • Adjusts from 19-1/2" to 31-1/2" in 2" intervals • Large saddle secures load • Integrated carrying handle • Sold and to be used in pairs • Capacity is per pair



Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Base Size	WT. (Lb.)
302-93512	HW93512	10	20" / 31-1/2"	16" x 16"	90



### 3, 6, 10, 12 & 25-TON CAPACITY JACK STANDS



### 3, 6, 10, 12 & 25-TON CAPACITY JACK STANDS

- Unique spring loaded pawl provides constant locking pressure against lifting column when raising the column to the load - the benefit is that it makes it a one-handed operation
- Four legged base with foot pads for added strength and more secure footing
- Common machine bolt secures lifting column to stand and provides stability
- Recessed column saddle for acceptance of vehicle panel rail
- Design qualification tested to 200% of rated capacity
- Capacity is per pair

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	HT. Intervals	Saddle Size	Base Size	WT./Pr (Lb.)
<b>DOMESTIC</b>							
302-81205	81205	5	9-1/2" / 15-3/4"	3" x 2"	3" x 4-1/2"	9" x 9"	38
302-81208	81208	10	10-1/2" / 17"	4" x 1-1/2"	3" x 5"	12-1/2" x 12-1/2"	60
302-81209	81209	10	18-1/2" / 30"	7" x 1-1/2"	3" x 5"	17" x 17"	80
302-81210	81210	10	28" / 47"	10" x 2"	3" x 5"	16" x 16"	106
302-81225	81225	25	12" / 20"	3" x 3"	2-1/4" x 3-1/4"	10" x 10"	65
<b>IMPORT</b>							
302-81004	81004C	3	12" / 17-1/2"	9/16"	1-1/8" x 4-9/16"	7-1/2" x 7-7/8"	19
302-81006	81006D	6	16-1/4" / 24-7/8"	5/8"	1-1/8" x 4-7/8"	10-1/16" x 11-1/16"	30
302-81012	81012	12	19-5/8" / 29-3/8"	1-1/4"	1-5/8" x 4-3/4"	13" x 15"	86
302-82205	81205i	5	9-1/2" / 15-3/4"	3" x 2"	3" x 4-1/2"	9" x 9"	38
302-82208	81208i	10	10-1/2" / 17"	4" x 1-1/2"	3" x 5"	12-1/2" x 12-1/2"	60
302-82209	81209i	10	18-1/2" / 30"	7" x 1-1/2"	3" x 5"	17" x 17"	80
302-82210	81210i	10	28" / 47"	10" x 2"	3" x 5"	16" x 16"	106
302-82225	81225i	25	12" / 20"	3" x 3"	2-1/4" x 3-1/4"	10" x 10"	65

### 6 AND 12-TON MAGIC LIFT™ JACK STANDS



### 6 AND 12-TON MAGIC LIFT™ JACK STANDS

- Innovative design of Magic Lift offers a fast lift for professional performance
- Rack bar quickly raises to desired support point
- Heavy gauge, steel frame helps prevent distortion and twisting
- Counter-weighted pawl locks ratchet bar securely in place
- Capacity is per pair



Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Base Size	WT./Pr (Lbs.)
302-32066	32066	6-Ton	15-3/4" / 25"	11" x 10"	34
302-32126	32126	12-Ton	15-1/2" / 24-1/4"	14-3/4" x 12-3/4"	77





## TRANSMISSION &amp; SPECIALTY JACKS



## 9-TON CAPACITY JACK STANDS

- Ideal for Forklift Trucks
- Sturdy, welded steel construction
- Heavy gauge steel frame prevents distortion or twisting
- Sold in pairs

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Wt. (Lb.)
302-14360	14360	9	9-1/2" / 16-1/2"	25

STURDY,  
WELDED  
STEEL

302-14360

## 20-TON CAPACITY HEAVY DUTY JACK STANDS

- Sturdy, welded steel construction for superior safety and strength
- Heavy gauge, steel frame helps prevent distortion or twisting
- Sold in pairs
- Capacity is per pair

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Wt. (Lb.)
302-14400	14400	20 per pair	12" / 20"	72

HEAVY  
GAUGE  
STEEL  
FRAME

302-14400

## 40-TON ADJUSTABLE JACK STANDS

- 3 lock pin settings for adjustable heights
- Certified to 150% of stated capacity
- Adjustable Swivel allows for 2" of variance at locked settings
- Sold in pairs
- Capacity: 20 tons per stand

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.
302-14405	14405	40 per pair	10" / 21.9"

TWIST UP  
& DOWN  
TO ADJUST  
TOP

302-14405



## 25-TON HEAVY DUTY JACK STAND

- Ideal for fleet, agricultural, and construction maintenance
- Pin style column adjusts in 1-1/2" height intervals
- Heavy duty square tubing
- Large saddle securely supports load
- Sold in pairs

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Height Intervals	Base Size	Wt. (Lb.)
302-93526	HW93526F	25	12-3/8" / 20-3/8"	2-1/8"	10" x 10"	90

HEAVY  
DUTY  
SQUARE  
TUBING

302-93526

www.ascotsupply.com

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).
371-72000  
1-1/2-Ton  
Capacity Truck  
Transmission  
Jacks

## 1-1/2-TON CAPACITY TRUCK TRANSMISSION JACKS

- For heavy truck transmissions
- Fully adjustable universal saddle with adjustable arms to position the transmission
- Heavy duty chain with convenient chain tensioner secures load to saddle
- Safety bypass system prevents damage to the hydraulic cylinder
- Norco manufactures over 20 vehicle and service specific adapters to enhance the capabilities of their transmission jacks

UNIVERSAL  
SADDLE

Ascot No.	Mfg. No.	Capacity	Min. Hgt. / Max. Hgt.	Wheel Diam.	Chassis Size	Saddle Size	Wt. (Lbs.)
<b>DOMESTIC</b>							
371-72000	72000E	1-1/2-Ton	7-3/4" / 36-1/2"	4"	25" / 45"	10-1/4" / 11"	310
<b>IMPORT</b>							
371-72001	72000EI	1-1/2-Ton	7-3/4" / 35-2/4"	4"	26-1/2" / 44-1/2"	10-1/4" / 15-1/4"	302

## 1-TON CAPACITY HYDRAULIC TRANSMISSION JACK

- Designed for the removal, installation and transportation (in the lowered position) of heavy duty truck transmissions that are raised by an above-ground lift
- Air/hydraulic foot pump for hands free operation
- Fully adjustable universal saddle with adjustable arms
- Heavy duty chain with chain tensioner to secure load to saddle
- Made in Taiwan

AIR/  
HYDRAULIC  
FOOT  
PUMPUNIVERSAL  
SADDLE371-72701  
1-Ton Capacity Hydraulic  
Transmission Jack

Ascot No.	Mfg. No.	Capacity	Min. Height	Max. Height	Wt. (Lbs.)
371-72701	72701	1 Ton	41-1/4"	69-3/8"	273

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com

## TRANSMISSION &amp; SPECIALTY JACKS



## TRANSMISSION JACK &amp; FUEL TANK REMOVER ADAPTERS

- Allows for a safer and quicker removal of transmissions that are not flat on the bottom
- Adapters fit transmission jacks 72050E, 72500E and 72550B

Ascot No.	Mfg. No.	Description
309-72501	72501B	Adapter for use on GMC 4-Wheel Drive Transmission Case. WEIGHT: 18 lb.
309-72502	72502B	Adapter for use on 4 and 5 Speed Truck Transmissions. WEIGHT: 13 lb.
309-72504	72504B	Adapter for use on GMC Front Wheel Drive Transmissions. WEIGHT: 24 lb.
309-72505	72505B	Adapter for use on GMC Front Wheel Drive Transmissions (X, J and A Bodies) 3T40. WEIGHT: 15 lb.
309-72506	72506B	Adapter for use on GMC 440 Metric Transmissions 4T60-E. WEIGHT: 11-1/2 lb.
309-72507	72507A	Adapter for use on Ford 640E & 4R100 (4WD) Truck & Van Transmissions
309-72508	72508	Fuel Tank Adapter
309-72517	72507B	Adapter for use on Ford E40D Truck Transmissions. WEIGHT: 34 lb.
309-72525	72525	Optional saddle that replaces the four Adjustable Corner Brackets found on Standard and Universal Saddles
309-72533	72533	This tool will allow for the safe and secure removal and installation of DPFs, Drive Shafts, and automotive transmissions up to 750lb. The bean bag eliminates the need for individual DPF transmission adapters.



371-72533

309-72508  
Fuel Tank Adapter309-72525  
Optional Saddle371-93718  
1-Ton Floor Style Transmission Jack

## 1-TON FLOOR STYLE TRANSMISSION JACK

- Wishbone design allows unit more mobility
- Wide stance tubular steel frame equipped with a 4 ball bearing 360° swivel casters
- Built in relief valves prevent overloading
- Two heavy cast adjustable mounting plates and load restraint chain
- 2 Year Warranty

BUILT-IN  
RELIEF  
VALVESWISHBONE  
DESIGN

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Chassis Size	Forward Tilt/ Rear Tilt	Sideway Tilt	Wt. (Lb.)
371-93718	HW93718	1	10-1/4" / 45-1/4"	47-1/2" x 28-1/4"	27-11/16" / 32"	13° L & R	309

www.ascotsupply.com

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).
371-93720  
Telescopic Transmission JackLOAD  
RETENTION  
PINFULLY  
AIR  
OPERATED

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Lifting Head Hgt.	Chassis Size	Forward Tilt/Rear Tilt	Sideway Tilt	Wt. (Lb.)
371-93720	HW93720	1/2	34"-1/2" / 72"	11-3/8" x 11-3/8"	41-1/4" x 41-1/4"	50° / 20°	11° L & R	117



## TELESCOPIC TRANSMISSION JACK

- First stage utilizes air for a quick initial rise
- Second stage uses hydraulic hand pump for precise control
- Four ratcheting brackets fit transmission pan flanges
- Hefty nylon safety strap helps anchor transmission
- Wide spread casters for smooth maneuverability
- Head adjustments made easy with big easy-to-grip crank handles
- Optional adapters available
- 2 Year Warranty



## TELESCOPIC TRANSMISSION JACK

- Chrome-plated rams maximize its high reach operated by a user friendly foot pedal
- Extra-wide base lowers center of gravity and promotes stability
- Rugged steel wheels and full swivel ball bearing casters
- Adjustable ratchet style saddle (Model 41000C and 41001C)
- A unique release pedal provides safety in lowering the load
- Model 41000C and 41001C are 2 stage manual
- Model 41001C is Air Actuated and requires 110-175 PSI

371-41000  
Telescopic Transmission JackCHROME  
PLATED  
RAMS

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Saddle Base	Min. Exp. Saddle Area	Max. Exp. Saddle Area	Jack Size	Wt. (Lb.)
371-41000	41000C	1/2	39-22/25" / 77-1/4"	12-5/8" x 7-7/8"	12-5/8" x 7-7/8"	21" x 21"	33-13/100" x 35-1/2"	161
371-41001	41001C	1/2	39-7/8" / 77-1/4"	11-1/2" x 11-1/2"	11-1/2" x 11-1/2"	21" x 21"	33-13/100" x 35-1/2"	171
371-42003	42003	1	46" / 74-3/4"	13 x 13	13 x 13	24-1/2" x 19"	42" x 39-3/4"	294

## FLOOR-STYLE TELESCOPIC TRANSMISSION JACK

- The adjustable head can be tilted forward, backward and side to side for optimum alignment of transmission bolt pattern and pins
- Hydraulic system is protected from internal damage by a patented by-pass mechanism
- Load-restraining chain is vital for raising and lowering safety
- Four wheel casters allow easy movement and positioning of transmission jack
- Rugged steel wheels and full swivel ball bearing casters
- User friendly 360° rotating pumping socket for maximum in directional operation



371-43000

FULLY  
ADJUSTABLE  
HEAD

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Saddle Length	Handle Length	Exp. Saddle Area	Jack Size	Wt. (Lb.)
371-42000	42000C	1	7-3/4" / 33"	14-5/4" x 7-7/8"	22-1/2"	17" x 15-1/2"	39-5/8" x 19-1/8"	200
371-43000	43000	1-1/2	7-7/8" / 37-1/4"	14-3/4" x 16-1/8"	29-1/2"	16-1/8" x 26-7/8"	46-3/4" x 25-5/8"	376

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com



## TRANSMISSION &amp; SPECIALTY JACKS ➔

**FULLER ROAD RANGER TRANSMISSION ADAPTER FOR HW93718**

- Fuller Transmission Kit for HW93718

Ascot No.	Mfg. No.	Description
309-93248	HW93248	Fuller Road Ranger Transmission Adapter for HW93718

**309-93248**  
Fuller Road Ranger  
Transmission  
Adapter for  
HW93718

**FUEL TANK ADAPTER FOR OMEGALIFT AND HEIN-WERNER TRANSMISSION JACKS**

- Specifically designed to enable the telescopic transmission jack to be used in the removal and installation of fuel tanks
- Maximum tank size of 40 gallons
- Two (2x) ratcheting nylon safety straps
- Four (4x) padded arms to avoid damage on metal tank

Ascot No.	Mfg. No.	Description
309-40080	40080	Fuel Tank Adapter for OmegaLift and Hein-Werner Transmission Jacks

**309-40080**  
Fuel Tank Adapter

**HEIN-WERNER MULTIPURPOSE TRANSMISSION ADAPTER**

- Optional, for use with HW93720

Ascot No.	Mfg. No.	Description
309-93721	HW93721	Hein-Werner - Multipurpose Transmission Adapter

**309-93721**  
Hein-Werner Multipurpose  
Transmission Adapter

**OMEGA LIFT****20-TON TRUCK RAMPS**

- Specifically designed for heavy-duty tasks
- 33" Long T-handle increases mobile efficiency
- Sold in sets of two only



Ascot No.	Mfg. No.	Cap. (Tons)	Frame Size	Wheel Diam.	Handle Length	WT. (Lb.)
302-93200	93200	20	13-1/2" x 45"	5"	33-3/4"	267

**302-93200**  
20-Ton Truck Ramp


[www.ascotsupply.com](http://www.ascotsupply.com)

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

**HEIN-WERNER  
AUTOMOTIVE****10-TON AIR OPERATED WHEEL LIFT SYSTEM**

- Lifts engage wheels without needing to remove panels on vehicle
- Raise front or rear end of vehicle using a single controller
- Load retention pin allows lifts to function as stands in six different positions
- Completely air operated
- 2 Year Warranty
- Sold in pairs



**308-93693**  
10-Ton Air Operated  
Wheel Lift System

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Power Raise	Wheel Diam. MIN./MAX.	Frame Size (W x D x H)	PSI	WT. (Lb.)
308-93693	HW93693	10	Floor Level / 24"	24"	19-1/2" / 24-1/2"	41-9/16" x 44-1/4" x 53-1/4"	160	1,254

**HEIN-WERNER  
AUTOMOTIVE****10-TON CAPACITY LIFT JACKS**

- Doubles as a support stand
- HW93737A has a removable handle and 10 foot air hose for safe position and operation
- Completely air-operated
- 2 Year Warranty



**308-93737**  
10-Ton Capacity  
Lift Jack

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Power Raise	Saddle Spread	Lifting to front Saddle Distance	Height Intervals	Min. PSI for Rated Load	WT. (Lb.)
308-93690	HW93690	10	17-3/4" / 40"	28"	28" to 53"	13"	N/A	200	670
308-93737	93737A	10	17" / 52-1/2"	11-1/2"	N/A	N/A	2-1/2"	200	165

**308-93690**  
10-Ton Capacity  
Lift Jack

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

[www.ascotsupply.com](http://www.ascotsupply.com)

**OMEGA LIFT**

## TRANSMISSION & SPECIALTY JACKS


**HD PIN  
LOCKING  
SYSTEM**
**FULLY AIR  
OPERAT-**

### 10-TON AIR JACK AND SUPPORT STAND

- Operates as both a support stand and air actuated jack
- Completely air operated and has a heavy duty pin locking system
- Comes with a 10 foot air hose and maneuverable wheel base for easy accurate positioning
- A total lift range of 17-1/2" to 51" makes it a very versatile and helpful piece of equipment

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Hydraulic Height	Base Size	Wt. (Lb.)
308-34100	34100	10 Ton	17-1/2" / 51-1/8"	11-1/2"	22" X 12"	189

**308-34100**  
10-Ton Air Jack and Support Stand

### 10 AND 15-TON CAPACITY PORTABLE AIR LIFT JACKS

- Designed for use in garages/repair shops of truck, farm equipment, construction equipment and bus companies
- Ideal for crowded conditions that require single point contact
- Three-way heavy duty air valve provides fine control when lifting or lowering a load
- Extension tubes and detent pins offer multiple lifting heights
- Unit easily maneuvered on two 8" diameter rubber tread wheels
- Removable handle and 8' air hose for remote safe positioning and operation
- Lifting saddle with serrated surface and locating lugs
- May be used in pairs

**308-82990**  
10-Ton Capacity Portable Air Lift Jack

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Overall Length	Overall Width	Overall Height	Stroke	Wt. (Lb.)
308-82990	82990C	10	17-3/4" / 49-3/8"	58"	13-5/8"	17-3/4"	11-1/2"	178
308-82992	82992	15	18-1/8" / 51-3/8"	59-1/2"	15"	18-1/8"	11-1/4"	279

**3-WAY  
HEAVY  
DUTY AIR  
VALVE**
**NORCO**

### 10-TON CAPACITY AIR LIFT JACK

- Designed for use in truck and farm equipment dealer garages, heavy duty construction repair shops and bus company garages
- Three-way heavy duty air valve provides fine control when lifting or lowering a vehicle
- Automatic safety lock engages in six different height positions independent of air pressure
- Designed for lifting entire front or rear of a vehicle
- Front swivel caster wheel and two 12-1/4" diameter pneumatic rear tires provide easy maneuverability
- Adjustable lifting saddles can be raised and extended to desired position

**308-82999**  
10-Ton Capacity Air Lift Jack



Ascot No.	Mfg. No.	Cap.	Min. Hgt. / Max. Hgt.	Min. PSI for Rated Load	Wt. (Lbs.)
308-82999	82999	10-Ton	12-1/2" / 50"	200	817
308-83999	83999i	10-Ton	12-1/4" / 49-1/2"	200	817

**3-WAY  
HEAVY  
DUTY AIR  
VALVE**
**ADJUST-  
ABLE  
LIFTING  
SADDLES**
**NORCO**

### 4-TON CAPACITY FORKLIFT JACK

- Two-position saddle at scissors end can be quickly rotated to handle either edges or flat surfaces of a load
- 2-1/4" low lift height at scissors end
- 30" removable handle for ease of pumping and storage when not in use
- Our "fingertip control" release knob provides slow, controlled, lowering of the load
- Safety bypass and overload systems prevent cylinder damage and prevent the jack from being used beyond the ASME/PASE load-limiting standard

#### TWO POSITION SADDLE AT SCISSORS END



Lifts at edge



Lifts flat surfaces

**TWO-  
POSITION  
SADDLE**

**302-72036**  
4-Ton Capacity Forklift Jack

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Overall Length	Overall Width	Wt. (Lb.)
302-72036	72036D	4	2-1/4" / 16-1/4"	26-1/8"	8-3/4"	75



## TRANSMISSION &amp; SPECIALTY JACKS

**OMEGA LIFT****4-TON CAPACITY FORKLIFT JACK**

- **DUAL LIFT POINTS FOR VARIOUS LIFTING APPLICATIONS:** The lower point is for forklift truck lifts and the higher point is for most farm equipment lifts
- Precision control of lifting and lowering functions

DUAL  
LIFT  
POINTS

**302-28045**  
4-Ton Capacity  
Forklift Jack



**302-93659**  
4-Ton Floor  
Forklift Jack



Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt. / Max. Hgt.	Wt. (Lb.)
302-28045	28045	4	3" / 17-1/2"	91

HEIN-WERNER  
AUTOMOTIVE**4-TON FLOOR FORKLIFT JACK**

- Specially designed seals and strong steel construction
- Low pick-up height
- Removable handle and compact size
- **2 Year Warranty**

STRONG  
STEEL  
DESIGN

Ascot No.	Mfg. No.	Cap. (Tons)	Min. Hgt./ Max. Hgt.	Power Raise	Handle Length	Base Size	Wt. (Lb.)
302-93659	HW93659	4	2-1/2" / 16-1/2"	14"	25"	8" x 26-1/2"	71

**1/2-TON CAPACITY HYDRAULIC WHEEL DOLLY**

- For the removal and installation of single, tandem and duplex tires and wheels which are mounted on trucks that are supported above ground level
- Heavy duty lift arms made with ball bearing conveyor rollers allow easy rotation of wheels for alignment with bolt pattern
- 7-1/2" of side-to-side lift arm adjustment eliminates the trial and error method of aligning the rim's lug holes with the wheel drum
- A 1500-pound capacity heavy duty winch with 5-to-1 gear ratio provides ease of operation
- The winch gear design acts as a brake and allow the load to be lowered incrementally if desired and without the need of constant hand pressure against the crank handle
- A hydraulic jack tilts the lift arms in order to match the angle of the spindle
- Safety chain provided to secure tires and wheels to the dolly
- Maneuverability is made easy by means of two rear mounted ball bearing swivel caster wheels. The caster wheels include a locking mechanism which can prevent the dolly from moving
- Perfect for use with truck lifts
- **ASSEMBLED in the USA**
- 82304 has the same great features as the 82302B but also includes an air-operated pump that allows the unit to lift the load effortlessly



407-82302

INCLUDES  
AIR-OPERATED  
PUMP

407-82304

HEAVY DUTY  
LIFT ARMSEASE OF  
OPERATIONSAFETY  
CHAIN  
PROVIDED**WHEEL DOLLY SPECIFICATIONS**

Ascot No.	Mfg. No.	Cap. (Tons)	Lift Range	Tilt Range	Lift Arm Size	Side to Side Adj.	Product Size (W x D x H)	Wt. (Lb.)
407-82302	82302B	1/2	3" - 41-1/4"	-2°-30°	24-1/4" x 21"	3-1/4" (Left), 4-1/4" (right)	45-3/4" x 43-3/4" x 62"	315
407-82304	82304	1/2	2-1/8" - 39-1/2"	-2°-30°	30-7/8" x 22-1/8"	2-1/2" (Left), 4-1/2" (right)	49-5/8" x 44-5/8" x 69-7/8"	476

## WHEEL DOLLIES



### HEAVY DUTY TIRE DOLLY

- Reduce back injuries
- Perfect stud alignment
- Perfect for 8 to 10-hole Budd-type wheels
- Removes truck wheels and tires quickly and easily
- Increases productivity
- Reduces manpower needs
- Saves time and money, maintenance free
- Works with tires 23.5" to 43.5"

Ascot No.	Mfg. No.	Description
407-03000	BJ-T300A	Heavy Duty Tire Dolly
AVAILABLE ACCESSORIES FOR HEAVY DUTY TIRE DOLLY		
407-10400	104	Roller Sets for Heavy Duty Tire Dolly
407-11100	111	Rubber Wheel for Heavy Duty Tire Dolly
407-11200	112	Deep Groove Ball Bearing for Heavy Duty Tire Dolly
407-11600	116	Pin Lock for Heavy Duty Tire Dolly
407-11900	119	Rubber Cover for Heavy Duty Tire Dolly
407-12000	120	Nylon Wheel for Heavy Duty Tire Dolly



### TW2000 TWEEL HANDLER™

- The TW2000 solution is a built-in ratcheting jack with 14" of vertical travel
- The Tweel Handler's U-shaped chassis allows you to get close to the work area, with unhindered access to the tire in the cradle
- No restraining chains are required, yet the Tweel Handler™ holds virtually any single truck wheel, including wide-based singles
- Three heavy-duty ball-bearing wheels mounted under ball-bearing swivel casters make it highly maneuverable

Ascot No.	Mfg. No.	Description
407-02000	TW2000	TW2000 Tweel Handler™



### SAFER-GO TRUCK TIRE DOLLY

- This convenient dolly makes manually lifting wheel sets completely unnecessary
- Simply slide the rollers underneath the tire and use the jack handle to raise it to the desired height
- Use the included Gaither O-LINE-ER® to perfectly position the wheel for easy installation
- Equipped with a collapsible handle frame making it easy to store and ideal for mobile service
- LIFTING CAPACITY: 350 lbs.

Ascot No.	Mfg. No.	Description
407-47110	G471106	Safer-Go Truck Tire Dolly

407-47110



www.ascotsupply.com

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



### TRUCK WHEEL DOLLY

- Tire/wheel is rotated left or right on tiltable roller pads for perfect stud alignment
- Perfect for 8-10 hole Budd type wheels
- Removes truck wheels and tires fast and easy
- Increases productivity
- Reduces manpower needs
- Saves time and money, maintenance free
- Heavy duty tubular construction lifts 280 lbs.
- 3" caster wheels roll the truck wheels for effortless removal or replacement

Ascot No.	Mfg. No.	Description
407-70130	70130	TRUCK: 8" Rollers (280 lbs. capacity)
407-70132	70132	SUPER SINGLE: 14" Rollers (450 lbs. capacity)



### TIRE DOLLIES

- Heavy-duty tubular steel construction capable of handling 300 pounds
- Easy grip handle along with improved "bent arm" design improves leverage for easier installation and minimizes back strain
- Steel alignment rollers for simple alignment of the wheel to the wheel studs
- Spring-loaded kickstand offers convenient storage
- Can accommodate tire diameters from 36" to 48"

Ascot No.	Mfg. No.	Description
407-82310	82310	22" Narrow Single Tire Handler Dolly
407-82312	82312	26" Wide Single Tire Handler Dolly



### WINNTEC TIRE DOLLY

- 500 lb. capacity allows for use on all commercial truck tire sizes
- Steel frame is more durable than Aluminum units
- Longer rollers (2-1/2" longer) makes it even easier to handle super single sizes
- Wheel position allows tech to lift tire/wheel assembly by pushing down, instead of lifting up
- O-LINE-ER and Bracket included with new production models (O-LINE-ER used for lining up stud holes with studs)

Ascot No.	Mfg. No.	Description
407-47105	G471105HD	Winntec Tire Dolly

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com



## WHEEL DOLLIES

FOUR  
SWIVEL  
CASTER  
WHEELSAIR-  
OPERATED  
CONTROLS

407-82306

### 300 LB. CAPACITY SINGLE TIRE LIFTER

- To safely assist a technician with the removal and installation of single wheels on vehicles that are supported on a lift
- Maneuverability is made easy by means of four swivel caster wheels
- Two rear caster wheels include a locking mechanism which can prevent the dolly from moving
- Unique offset design offers open access from the rear to mount wheel to the vehicle
- Onboard rollers make for easy stud-to-hole alignment
- Air-operated controls allows the unit to lift the load effortlessly
- 4" low height of support legs

Ascot No.	Mfg. No.	Cap.	Lift Travel	Min. Hgt. / Max. Hgt.	Width	Length	Wt. (Lbs.)
407-82306	82306	300 Lbs.	35-1/8"	4" / 39-1/8"	9" - 22"	17-1/2" - 33-1/4"	200

WIDE  
FRAME &  
LIFTING  
CARRIAGEMADE IN THE  
USAHANDY  
TOOL/  
PARTS  
TRAY

407-93766

### 3/4-TON WHEEL DOLLY

- For handling of dual wheels and large single wheels
- Designed to facilitate the removal and installation of pneumatic tires and wheel assemblies found on many trucks, buses and trailers
- Handles up to 52" diameter tires and wheels
- The frame is constructed from heavy gauge welded square tubular steel for maximum strength and durability
- Load levelers aid alignment
- Carriage arm rollers with self-lubricating bearings
- Restraining chain with the unit to secure the load
- 2 swivel ball bearing casters for easy positioning
- Wide frame and lifting carriage
- Handy tool/parts tray on frame
- The wheel dolly is designed to be used in conjunction with jacks and jacks stands
- 2 Year Warranty

Ascot No.	Mfg. No.	Cap. (Tons)	Lift Range	Arm length/ Spread	Overall Size (W x D x H)	Wt. (Lbs.)
407-93766	HW93766	3/4	4" - 9"	23" / 26-1/2"	39-1/2" x 38-3/4" x 32"	118

### 3/4-TON WHEEL DOLLY

- Hydraulic system actuated to provide smooth, positive power for the removal and installation of single, tandem, and duplex tires and wheels
- Lift arms can be adjusted to handle different wheel combinations
- Tilt range of -2 degrees to -5 degrees
- Width of 43" for large loads
- Load restraining chain for security

Ascot No.	Mfg. No.	Cap. (Tons)	Lift Range	Tilt Range	Lift Arm Size	Product Size (W x D x H)	Wt. (Lbs.)
407-47050	47050C	3/4	2-1/2" - 8-3/8"	2°-5°	25-7/8" x 25-1/4"	45-1/8" x 39-1/2" x 34-7/8"	222

HYDRAULIC  
SYSTEMCHAIN  
FOR LOAD  
RESTRAINT

407-47050

EASY TO  
POSITIONASSEMBLED  
IN U.S.A.

407-82320

### 3/4-TON WHEEL DOLLY

- Dolly handles any tire diameter and up to 1500 lb. combined tire and wheel weight
- Three 4" diameter swivel ball bearing caster wheels provide easy maneuverability and positioning
- Travel adjustment on rear locking caster wheel matches lifting arms with spindle angle
- 6" chain included to secure wheel assembly to dolly during removal and transport
- Quick disconnect push/pull handle provides unobstructed access to hub area
- Assembled in the USA

Ascot No.	Mfg. No.	Cap. (Tons)	Lift Travel	Lift Arm Size	Product Size (W x D x H)	Wt. (Lbs.)
407-82320	82320	3/4	4-3/4"	26" x 24-1/2"	43-1/2" x 39-1/2" x 35"	175

### 3/4-TON WHEEL DOLLY

- Hydraulic system actuated to provide smooth, positive power for the removal and installation of single, tandem, and duplex tires and wheels
- Load restraining chain for security

Ascot No.	Mfg. No.	Cap. (Tons)	Lift Range	Tilt Range	Lift Arm Size	Product Size (W x D x H)	Wt. (Lbs.)
407-47053	47053	3/4	2-1/4" - 11"	(-)2 - 5°	25-7/8" x 25-1/4"	43-1/2" x 43" x 34-7/8"	151

### WHEEL DOLLY FOR AGRICULTURAL AND EARTH MOVING MACHINERY

- Easy and safe mounting, demounting and handling of large wheels on agricultural and earth moving machinery
- Capable of handling large wheels from 45.3" up to 84.7" in diameter and up to 41.3" in depth
- CAPACITY: 3,306 lbs
- Double acting hydraulic system
- Hands-free switch between lifting and lowering action
- Safe and controlled lowering
- 2 x 4 large rollers improve handling of tires with deep treads
- Top-point wheel connection rod keeps the wheel in safe balance

Ascot No.	Mfg. No.	Description
407-90538	90538	Wheel Dolly for Agricultural and Earth Moving Machinery

EASY AND  
SAFEFOUR  
LARGE  
ROLLERS

407-90538

HYDRAULIC SHOP PRESSES & SHOP EQUIPMENT



50 AND 100-TON CAPACITY  
HYDRAULIC SHOP PRESSES

• For heavy duty use in truck garages  
and industrial work shops

- Manually operated two speed pump provides quick ram travel to load
- Hand operated winch raises and lowers press bed
- Welded frames for strength and no assembly required
- Self-retracting ram is bearing mounted for lateral movement on head channel

• Delivered Fully Assembled

• Assembled in the USA

- 78057A features air/hydraulic foot pump and 10' hose
- 78058A and 78110B feature electro/hydraulic pump

FOR  
HEAVY  
DUTY  
USE

QUICK RAM  
TRAVEL  
TO LOAD

317-78058  
50-Ton Capacity  
Hydraulic  
Shop Press



Ascot No.	Mfg. No.	Operating System	Cap. (Tons)	Ram Travel	Min. Hgt. / Max. Hgt.	Throat Width	Bed Height Adj.	Between Uprights	Between Bed Rails	Wt. (Lb.)
317-78055	78055A	Manual	50	6-1/4"	7-1/2" / 32-5/8"	34-1/2"	7 x 5"	5-5/8"	7-3/8"	804
317-78057	78057A	Air/Hydraulic	50	6-1/4"	7-1/2" / 32-5/8"	34-1/2"	7 x 5"	5-5/8"	7-3/8"	801
317-78058	78058A	Electro/Hydraulic	50	6-1/4"	7-1/2" / 32-5/8"	34-1/2"	7 x 5"	5-5/8"	7-3/8"	814
317-78077	78077	Air/Hydraulic	50	13-1/4"	7-1/2" / 32-5/8"	34-1/2"	7 x 5"	5-5/8"	7-3/8"	835
317-78078	78078	Electro/Hydraulic	50	13-1/4"	7-1/2" / 32-5/8"	34-1/2"	7 x 5"	5-5/8"	7-3/8"	846
317-78110	78110B	Electro/Hydraulic	100	10-1/4"	18-1/4" / 45-3/4"	40-1/4"	8 x 4-1/2"	5-5/8"	9"	1,777

ARBOR PLATES (FOR USE  
WITH NORCO 12 AND  
20-TON SHOP PRESSES)

- For use with Norco 12 and 20-ton shop presses only
- 1" x 4" x 10" long steel plates with "V" cutout on one edge and circle cutout on the other



317-78000

Ascot No.	Mfg. No.	Description
317-78000	78000	12 and 20-ton capacity pair of Arbor Plates. <b>WEIGHT:</b> 20 lb.

ARBOR PLATES (FOR USE  
WITH NORCO 50 AND  
100-TON SHOP PRESSES)

- For use with Norco 50 and 100-ton shop presses only

Ascot No.	Mfg. No.	Description
317-78056	78056A	50-ton capacity pair of Arbor Plates. <b>WEIGHT:</b> 108 lb.
317-78111	78111A	100-ton capacity pair of Arbor Plates. <b>WEIGHT:</b> 153 lb.

HYDRAULIC GAUGE  
WITH FITTING

- For use with Norco 12 and 20-ton capacity shop presses only
- 4" diameter face
- Dial indicates internal pressure (PSI) and corresponding pounds of force at ram end
- Accurate within 2-1/2%
- 1/4" NPT fitting



Ascot No.	Mfg. No.	Description
317-78021	78021	Hydraulic Gauge with Fitting. <b>WEIGHT:</b> 2 lb.

25-TON CAPACITY HYDRAULIC  
SHOP PRESS

- Excellent for bending, bonding or straightening applications
- Multi-position bed for work height adjustment
- Heavy steel welded construction

- Includes hand winch for easy bed adjustments
- Ideal for the removal or installation of gears, universal joints, pulleys, wrist pins, and other press jobs
- 4" pressure gauge

55-TON CAPACITY HYDRAULIC  
SHOP PRESS

- Excellent for bending, bonding or straightening applications; Ideal for the removal or installation of gears, universal joints, pulleys, wrist pins, and other press jobs

- Heavy steel welded construction
- Pressure relief valve for overload protection
- Dual stage release control valve
- Multi-position bed for work height adjustment

100-TON CAPACITY  
HYDRAULIC SHOP PRESS

- Excellent for bending, bonding or straightening applications
- 100-Ton Capacity
- Heavy steel welded construction
- Includes hand wench for easy bed adjustments
- 1 HP / 2-gallon electric pump

- Quiet operation meets OSHA regulations
- Industrial hard chrome-plated ram helps prevent rust and corrosion
- Ideal for the removal or installation of gears, universal joints, pulleys, wrist pins, and other press jobs



317-93400

SHOP PRESS SPECIFICATIONS

Ascot No.	Mfg. No.	Description	Capacity (Tons)	Stroke	Interior Width	Type of Pump	Working Height	Bed Positions	Shipping Weight (lb.)
317-93300	HW93300	25-Ton Shop Press with Manual Hand Pump	25	6"	30"	Hand Pump	6-1/2" - 49-1/2"	8	484
317-93400	HW93400	55-Ton Shop Press with Manual Pump	55	6"	35-1/2"	Air Pump	7-1/2" - 55-1/2"	9	855
317-93610	HW93610	100-Ton Shop Press with Electric Pump	100	10"	35-3/8"	Electric Pump	12-1/4" - 52-1/2"	6	1221



## BRAKE DRUM HANDLERS



## BRAKE DRUM HANDLER

• Designed for removing and installing and transporting outboard mounted brake drums and inboard mounted drums with disc wheel hubs • Reduces lost-time injuries • Handles 15" and 16-1/2" drums • Machine rotating handle provides ease of raising and lowering drum • Ball bearing wheels, semi-pneumatic tires and 3/4" diameter axle provide easy maneuverability and balance of the drum • Adjustable angle bracket secures both outboard and inboard mounted drums with disc wheel hubs to the drum handler's carriage • Detachable handle for convenient storage

FOUR ADJUSTABLE LEGS

FOR HEAVY LOADS



407-72040

Ascot No.	Mfg. No.	Low Lift Height	High Lift Height	Overall Size	Wheel Diameter	Wt. (Lb.)
407-72040	72040B	10-1/4"	15-1/4"	21" / 62-1/2"	8"	64



## BRAKE DRUM HANDLER

• Ideal for removing and installing truck brake drums • Works with 15" and 16-1/2" drums • Includes detachable handle for convenient storage



407-46000



Ascot No.	Mfg. No.	Description
407-46000	46000	Brake Drum Handler

## BACK BUDDY II

• The 350B Back Buddy II™ will make brake jobs easier and more profitable • This versatile tool was designed to prevent injuries from awkward lifting and keep workers' comp rates down • The Back Buddy II™ rolls under and bolts onto heavy drum and hub assembly, then handily rolls the assembly out and lays it over for servicing • Re-assembly is quick and precise because the Back Buddy II™ angles for perfect hub alignment, eliminating seal damage and costly fixes • The Back Buddy II™ handles all hub and drum assemblies with Universal Receiver and Adapter Sets • A simple change of adapters transforms the tool in seconds from inboard to outboard application • Adapters 6069 and 6073 10-hole inboard and outboard application are included • Other wheel adapters sold separately

REASSEMBLY IS QUICK &amp; PRECISE

407-00350



Ascot No.	Mfg. No.	Description
407-00350	350B	Back Buddy II



## DIESEL ENGINE STAND

- Rotating even a 6,000 lb. diesel engine is easy; a 96:1 ratio worm and gear set does the job
- The crank handle can be locked in any position
- Integral 12-ton jack raises the work to provide the swing radius needed for clearance
- Two front wheels and two rear casters provide mobility
- Universal adapter assembly permits use with a wide variety of mounting plates for Caterpillar, Cummins, Mack, IH, and Detroit in-line or "V" series diesel engines, as well as Allison transmissions
- COVERED BY OTC LIFETIME MARATHON WARRANTY™

Ascot No.	Mfg. No.	Description
331-01750	1750A	Diesel Engine Stand

331-01750  
Diesel Engine Stand

## TRUCK CLUTCH/FLYWHEEL HANDLER

- Replaces 14" and 15-1/2" clutch assemblies
- Swivel casters provide easy maneuverability
- Lifting range of 9" to 37"
- CARRIES A LIFETIME MARATHON WARRANTY™

Ascot No.	Mfg. No.	Description
331-05015	5015A	Truck Clutch/Flywheel Handler

331-05015  
Truck Clutch/  
Flywheel Handler

## HD CLUTCH ADJUSTING WRENCH

- Used for the internal adjustment of Spicer angle-spring and multiple-lever clutches

Ascot No.	Mfg. No.	Description
372-07028	7028	HD Clutch Adjusting Wrench

372-07028  
HD Clutch  
Adjusting Wrench

## HYDRAULIC JACK OIL

- Formulated with oxidation stable base oils, rust inhibitors, antiwear agents & antifoam agents to provide protection for hydraulic jacks and lifting equipment
- 32 oz. bottle • 6 bottles per case

PROTECTS LIFTING EQUIPMENT

309-00925



Ascot No.	Mfg. No.	Description
309-00925	MAG-925	Hydraulic Jack Oil (6 per Case)

## HYDRAULIC JACK OIL

309-93294



309-93291

Ascot No.	Mfg. No.	Description
309-93291	HW93291	Hydraulic Jack Oil - 1 Quart
309-93294	HW93294	Hydraulic Jack Oil - 1 Gallon



TIRE & WHEEL SERVICE ACCESSORIES



TUBE BRUSHES

- For internal cleaning and deburring of copper tube fittings

Ascot No.	Mfg. No.	Length	Brush Length	Dia.	Fill Wire	Trim Length
535-14168	14168	6-1/2"	1"	5/8"	Steel	—
535-14169	14169	6-1/2"	1"	1/2"	Steel	—
535-14180	14180	6-1/2"	1"	3/4"	Steel	—
535-14166	14166	8"	2"	1/2"	Steel	0.004

SCRATCH BRUSH

- 7 rows of steel bristles
- Ridged handle for better grip
- Common applications include cleaning dirt, rust, scale, chips and paint as well as plating and welding operations

Ascot No.	Mfg. No.	Size	Width/Face	Rows	Fill Wire	Wire Dia.	Trim Length
535-14159	14159	7-1/2"	7-1/2"	3x7	Stainless Steel	0.006"	7-1/2"

MISCELLANEOUS TIRE SWABS AND BRUSHES

Ascot No.	Mfg. No.	Description
437-00001	TS-1	Tire Swab - 11" OAL X 2" Diameter
437-00002	TS-2	Tire Swab - 15" OAL X 2" Diameter
437-00003	TS-3	Tire Swab - 18" OAL X 3" Diameter
437-40006	40006	Tire Lubricating Brush
437-13014	313014	Hunter-Style Tire Lubricating Brush













## STS SEALANTS

MORE SEALING. MORE SECURITY

### STS TIRE SEALANTS

- Seals 2x more punctures than the competition
- Permanently seals punctures up to 1/4"
- Prevents wheel corrosion, glycol free
- Non-toxic, non-flammable, non-combustible
- 100% bio-degradable and water soluble
- Lasts for the lifetime of the tire
- Wide range of applications
- Low freeze point, freeze/thaw stable

PREVENTS  
WHEEL  
CORROSION

FREEZE/  
THAW  
STABLE



STS Tire Sealants

Ascot No.	Mfg. No.	Description
<b>STS TIRE SEALANT</b>		
451-02416	STSC24-16	(24) 16 oz. Bottles
451-04128	STSCS4128	4 (1) Gallon Per Case
451-00640	STS640	5-Gallon Pail
451-00006	STS6G	6-Gallon Pail
451-00055	STS55G	55-Gallon Drum
451-00275	STS275T	275-Gallon Tote
<b>STS CONCENTRATE TIRE SEALANT</b>		
451-14128	STSCONCS4128	4 (1) Gallon Per Case
451-01640	STSCON640	5-Gallon Pail
451-00026	STSCON6G	6-Gallon Pail
<b>STS OTR TIRE SEALANT</b>		
451-24128	STSOOTRCS4128	4 (1) Gallon Per Case
451-02640	STSOOTR640	5-Gallon Pail
451-00036	STSOOTR6G	6-Gallon Pail
451-00255	STSOOTR55G	55-Gallon Drum

### STS TOOLS AND ACCESSORIES



Ascot No.	Mfg. No.	Description
451-00101	ST-XM-1	1 Gal. Hand Pump
451-00440	ST-XM-44	5 Gal. Hand Pump
451-00551	STXM55	55 Gal. Transfer Pump
451-00707	ST-TTS-WW	STS Display Stand
469-02311	VCR-A	Auto Valve Core Tool
469-02312	VCR-F	Farm Valve Core Tool

### ECO SEAL

- 7x corrosion resistance
- Maintains non-acidic pH levels, even in high temperatures
- Permanently seals punctures up to 1/4"
- Glycol-free; prevents wheel corrosion
- Environmentally friendly formula, uses recycled rubber and 100% biodegradable ingredients
- Non-toxic, non-flammable, non-combustible
- Low freeze point (-10°F)



USES  
RECYCLED  
RUBBER

LOW  
FREEZE  
POINT  
-10°F

Ascot No.	Mfg. No.	Description
451-05510	ST-XM55	5 Gal. EcoSeal Hand Pump
504-00005	ECO5G	5 Gal. Pail
504-00055	ECO55G	55 Gal. Drum
504-00275	ECO275G	275 Gal. Tote

 **WARNING:** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

[www.ascotsupply.com](http://www.ascotsupply.com)

## MARKERS

### PAINTSTIK® MARKERS

• **Real paint in stick form** • Ideal for coding tire casings • Marks are long lasting, water resistant and weather resistant • Marks will withstand vulcanizing and recap temperatures • Non-toxic, contains no lead • Marking range -50°F to 150°F (-46°C to 66°C) • **INCLUDES:** 12 sticks per box, 12 boxes per case

Ascot No.	Color	Ascot No.	Color	Ascot No.	Color
459-80220	White (Markal B)	459-80226	Green	459-80231	Gold
459-80221	Yellow (Markal B)	459-80227	Pink	459-80232	Aluminum
459-80222	Red	459-80228	Purple	459-80257	White
459-80223	Black	459-80229	Brown	459-80258	Yellow
459-80225	Blue	459-80230	Gray	459-80271	Orange

### MARKAL TYRE MARQUE

• **Ideal for temporary marking of tires** • Marks easily on wet or cold surfaces • Lead-free, zinc-free marks can be painted over • **SIZE:** 1/2" X 4-5/8" • **MARKING RANGE:** -20°F to 130°F (-29°C to 24°C) • **INCLUDES:** 12 sticks per box, 12 boxes per case

Ascot No.	Mfg. No.	Color
459-54220	51420	White
459-54222	51421	Yellow

### B® HEX WHITE TIRE PAINTSTIK

• **Ideal for temporary marking of tires** • Marks easily on wet or cold surfaces • **INCLUDES:** 12 sticks per box, 12 boxes per case

Ascot No.	Mfg. No.	Description
459-80250	80250	B® Hex White Tire Paintstik

### PAINTSTIK® MARKER HOLDER

Ascot No.	Mfg. No.	Description
459-85100	85100	6" Push-Button Metal Holder for B-Paintstik


### QUIK STIK® MINI

• Fast-drying, vibrant paint marks dry in 5 to 7 minutes • Compact plastic holder with clip cap stores easily in pocket and keeps hands and clothing clean • Marks on virtually any surface; wet, smooth, rough, or hot • Weather- and UV-resistant paint for long-lasting marks • Solid paint marker advances and retracts by turning twist-up knob • Xylene and 2-Butoxyethanol free formula to reduce health risks • **MARKING RANGE:** 0°F to 392°F (-18°C to 200°C)

Ascot No.	Mfg. No.	Description	Qty./Box
459-61126	61126	Mini Quik Stik® Marker (White)	12
459-61127	61127	Mini Quik Stik® Marker (Yellow)	12
459-61128	61128	Mini Quik Stik® Marker (Red)	12
459-61129	61129	Mini Quik Stik® Marker (Black)	12

[www.ascotsupply.com](http://www.ascotsupply.com)

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



## TIRE BRANDERS & ACCESSORIES

### TIRE REGROOVING TOOLS & ACCESSORIES

Ascot No.	Mfg. No.	Description
455-00003	RC414	Rubber Cut 414 Rema Regroover
455-00129	N/A	Set Screw for PS-15 Regroover
455-00401	W-1	Regroover Blades 20-Pack
455-00402	W-2	Regroover Blades 20-Pack
455-00403	W-3	Regroover Blades 20-Pack
455-00404	W-4	Regroover Blades 20-Pack
455-00405	W-5	Regroover Blades 20-Pack
455-00406	W-6	Regroover Blades 10-Pack
455-00444	No. 4 Head	Replacement Head for 125 Groover
455-04444	No. 4 Bld.	Replacement Blades for 125 Groover
455-12500	125	Heavy Duty Pistol Grip Tire Groover
455-15017	N/A	Transformer for PS-15 Regroover
455-15019	N/A	Rotative Switch for PS-15 Regroover



455-00003



The Rubber Cut 414 in use.

### SERIAL NUMBER REMOVER TOOL

Ascot No.	Mfg. No.	Description
531-95001	TTHB-1	Serial Number Remover Tool
531-95002	RRB-1	12-Pack Replacement Blades



531-95001

531-95002

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

[www.ascotsupply.com](http://www.ascotsupply.com)



LETTERS AND NUMBERS  
FOR TIRE BRANDERS1" Letters  
and Numbers

Ascot No.	Mfg. No.	Description
<b>1" LETTERS &amp; NUMBERS</b>		
452-00001	TBINOSET	Tire Brander 1" Number Set
452-00011	TBLETSET	Tire Brander 1" Letter Set
452-00100	BI-CC-1/2BR-0	Tire Brander 1" Insert: 0
452-00101	BI-CC-1/2BR-1	Tire Brander 1" Insert: 1
452-00102	BI-CC-1/2BR-2	Tire Brander 1" Insert: 2
452-00103	BI-CC-1/2BR-3	Tire Brander 1" Insert: 3
452-00104	BI-CC-1/2BR-4	Tire Brander 1" Insert: 4
452-00105	BI-CC-1/2BR-5	Tire Brander 1" Insert: 5
452-00106	BI-CC-1/2BR-6	Tire Brander 1" Insert: 6
452-00107	BI-CC-1/2BR-7	Tire Brander 1" Insert: 7
452-00108	BI-CC-1/2BR-8	Tire Brander 1" Insert: 8
452-00109	BI-CC-1/2BR-9	Tire Brander 1" Insert: 9
452-00201	BI-CC-1/2BR-A	Tire Brander 1" Insert: A
452-00202	BI-CC-1/2BR-B	Tire Brander 1" Insert: B
452-00203	BI-CC-1/2BR-C	Tire Brander 1" Insert: C
452-00204	BI-CC-1/2BR-D	Tire Brander 1" Insert: D
452-00205	BI-CC-1/2BR-E	Tire Brander 1" Insert: E
452-00206	BI-CC-1/2BR-F	Tire Brander 1" Insert: F
452-00207	BI-CC-1/2BR-G	Tire Brander 1" Insert: G
452-00208	BI-CC-1/2BR-H	Tire Brander 1" Insert: H
452-00209	BI-CC-1/2BR-I	Tire Brander 1" Insert: I
452-00210	BI-CC-1/2BR-J	Tire Brander 1" Insert: J
452-00211	BI-CC-1/2BR-K	Tire Brander 1" Insert: K
452-00212	BI-CC-1/2BR-L	Tire Brander 1" Insert: L
452-00213	BI-CC-1/2BR-M	Tire Brander 1" Insert: M
452-00214	BI-CC-1/2BR-N	Tire Brander 1" Insert: N
452-00215	BI-CC-1/2BR-O	Tire Brander 1" Insert: O
452-00216	BI-CC-1/2BR-P	Tire Brander 1" Insert: P
452-00217	BI-CC-1/2BR-Q	Tire Brander 1" Insert: Q
452-00218	BI-CC-1/2BR-R	Tire Brander 1" Insert: R
452-00219	BI-CC-1/2BR-S	Tire Brander 1" Insert: S
452-00220	BI-CC-1/2BR-T	Tire Brander 1" Insert: T
452-00221	BI-CC-1/2BR-U	Tire Brander 1" Insert: U
452-00222	BI-CC-1/2BR-V	Tire Brander 1" Insert: V
452-00223	BI-CC-1/2BR-W	Tire Brander 1" Insert: W
452-00224	BI-CC-1/2BR-X	Tire Brander 1" Insert: X
452-00225	BI-CC-1/2BR-Y	Tire Brander 1" Insert: Y
452-00226	BI-CC-1/2BR-Z	Tire Brander 1" Insert: Z

## TIRE BRANDERS &amp; ACCESSORIES

1/2" Letters  
and Numbers

Ascot No.	Mfg. No.	Description
<b>1/2" LETTERS &amp; NUMBERS</b>		
452-00012	TBI/2NOSET	Tire Brander 1/2" Number Set
452-00012	TBI/2LETSET	Tire Brander 1/2" Letter Set
452-02100	BI-CC-1/2BR-0	Tire Brander 1/2" Insert: 0
452-02101	BI-CC-1/2BR-1	Tire Brander 1/2" Insert: 1
452-02102	BI-CC-1/2BR-2	Tire Brander 1/2" Insert: 2
452-02103	BI-CC-1/2BR-3	Tire Brander 1/2" Insert: 3
452-02104	BI-CC-1/2BR-4	Tire Brander 1/2" Insert: 4
452-02105	BI-CC-1/2BR-5	Tire Brander 1/2" Insert: 5
452-02106	BI-CC-1/2BR-6	Tire Brander 1/2" Insert: 6
452-02107	BI-CC-1/2BR-7	Tire Brander 1/2" Insert: 7
452-02108	BI-CC-1/2BR-8	Tire Brander 1/2" Insert: 8
452-02109	BI-CC-1/2BR-9	Tire Brander 1/2" Insert: 9
452-00501	BI-CC-1/2BR-A	Tire Brander 1/2" Insert: A
452-00502	BI-CC-1/2BR-B	Tire Brander 1/2" Insert: B
452-00503	BI-CC-1/2BR-C	Tire Brander 1/2" Insert: C
452-00504	BI-CC-1/2BR-D	Tire Brander 1/2" Insert: D
452-00505	BI-CC-1/2BR-E	Tire Brander 1/2" Insert: E
452-00506	BI-CC-1/2BR-F	Tire Brander 1/2" Insert: F
452-00507	BI-CC-1/2BR-G	Tire Brander 1/2" Insert: G
452-00508	BI-CC-1/2BR-H	Tire Brander 1/2" Insert: H
452-00509	BI-CC-1/2BR-I	Tire Brander 1/2" Insert: I
452-00510	BI-CC-1/2BR-J	Tire Brander 1/2" Insert: J
452-00511	BI-CC-1/2BR-K	Tire Brander 1/2" Insert: K
452-00512	BI-CC-1/2BR-L	Tire Brander 1/2" Insert: L
452-00513	BI-CC-1/2BR-M	Tire Brander 1/2" Insert: M
452-00514	BI-CC-1/2BR-N	Tire Brander 1/2" Insert: N
452-00515	BI-CC-1/2BR-O	Tire Brander 1/2" Insert: O
452-00516	BI-CC-1/2BR-P	Tire Brander 1/2" Insert: P
452-00517	BI-CC-1/2BR-Q	Tire Brander 1/2" Insert: Q
452-00518	BI-CC-1/2BR-R	Tire Brander 1/2" Insert: R
452-00519	BI-CC-1/2BR-S	Tire Brander 1/2" Insert: S
452-00520	BI-CC-1/2BR-T	Tire Brander 1/2" Insert: T
452-00521	BI-CC-1/2BR-U	Tire Brander 1/2" Insert: U
452-00522	BI-CC-1/2BR-V	Tire Brander 1/2" Insert: V
452-00523	BI-CC-1/2BR-W	Tire Brander 1/2" Insert: W
452-00524	BI-CC-1/2BR-X	Tire Brander 1/2" Insert: X
452-00525	BI-CC-1/2BR-Y	Tire Brander 1/2" Insert: Y
452-00526	BI-CC-1/2BR-Z	Tire Brander 1/2" Insert: Z

1/4" Letters  
and Numbers

Ascot No.	Mfg. No.	Description
<b>1/4" LETTERS &amp; NUMBERS</b>		
452-00014	TBI/4NOSET	Tire Brander 1/4" Number Set
452-00014	TBI/4LETSET	Tire Brander 1/4" Letter Set
452-01100	BI-CC-1/4BR-0	Tire Brander 1/4" Insert: 0
452-01101	BI-CC-1/4BR-1	Tire Brander 1/4" Insert: 1
452-01102	BI-CC-1/4BR-2	Tire Brander 1/4" Insert: 2
452-01103	BI-CC-1/4BR-3	Tire Brander 1/4" Insert: 3
452-01104	BI-CC-1/4BR-4	Tire Brander 1/4" Insert: 4
452-01105	BI-CC-1/4BR-5	Tire Brander 1/4" Insert: 5
452-01106	BI-CC-1/4BR-6	Tire Brander 1/4" Insert: 6
452-01107	BI-CC-1/4BR-7	Tire Brander 1/4" Insert: 7
452-01108	BI-CC-1/4BR-8	Tire Brander 1/4" Insert: 8
452-01109	BI-CC-1/4BR-9	Tire Brander 1/4" Insert: 9
452-00401	BI-CC-1/4BR-A	Tire Brander 1/4" Insert: A
452-00402	BI-CC-1/4BR-B	Tire Brander 1/4" Insert: B
452-00403	BI-CC-1/4BR-C	Tire Brander 1/4" Insert: C
452-00404	BI-CC-1/4BR-D	Tire Brander 1/4" Insert: D
452-00405	BI-CC-1/4BR-E	Tire Brander 1/4" Insert: E
452-00406	BI-CC-1/4BR-F	Tire Brander 1/4" Insert: F
452-00407	BI-CC-1/4BR-G	Tire Brander 1/4" Insert: G
452-00408	BI-CC-1/4BR-H	Tire Brander 1/4" Insert: H
452-00409	BI-CC-1/4BR-I	Tire Brander 1/4" Insert: I
452-00410	BI-CC-1/4BR-J	Tire Brander 1/4" Insert: J
452-00411	BI-CC-1/4BR-K	Tire Brander 1/4" Insert: K
452-00412	BI-CC-1/4BR-L	Tire Brander 1/4" Insert: L
452-00413	BI-CC-1/4BR-M	Tire Brander 1/4" Insert: M
452-00414	BI-CC-1/4BR-N	Tire Brander 1/4" Insert: N
452-00415	BI-CC-1/4BR-O	Tire Brander 1/4" Insert: O
452-00416	BI-CC-1/4BR-P	Tire Brander 1/4" Insert: P
452-00417	BI-CC-1/4BR-Q	Tire Brander 1/4" Insert: Q
452-00418	BI-CC-1/4BR-R	Tire Brander 1/4" Insert: R
452-00419	BI-CC-1/4BR-S	Tire Brander 1/4" Insert: S
452-00420	BI-CC-1/4BR-T	Tire Brander 1/4" Insert: T
452-00421	BI-CC-1/4BR-U	Tire Brander 1/4" Insert: U
452-00422	BI-CC-1/4BR-V	Tire Brander 1/4" Insert: V
452-00423	BI-CC-1/4BR-W	Tire Brander 1/4" Insert: W
452-00424	BI-CC-1/4BR-X	Tire Brander 1/4" Insert: X
452-00425	BI-CC-1/4BR-Y	Tire Brander 1/4" Insert: Y
452-00426	BI-CC-1/4BR-Z	Tire Brander 1/4" Insert: Z

## CHARACTER SETS

Ascot No.	Mfg. No.	Description	Ascot No.	Mfg. No.	Description
452-00001	TBINOSET	1" Tire Brander Number Set	452-00014	TBI/4NOSET	1/4" Tire Brander Number Set
452-00011	TBLETSET	1" Tire Brander Letter Set	452-00012	TBI/2LETSET	1/2" Tire Brander Letter Set
452-00012	TBI/2NOSET	1/2" Tire Brander Number Set	452-00014	TBI/4LETSET	1/4" Tire Brander Letter Set

## BEAD BREAKERS

"COMBI" TIRE BEAD  
BREAKER

- Works on a single, two and three-piece truck, agricultural and earthmover tire/rim
- Breaks beads in seconds using 10,000 lbs. of force • No screws, bolts or attachments
- "Combi" bead breaker will not work on five-piece earth mover giant wheel/rim

QUICKLY  
BREAKS  
BEADS

Ascot No.	Mfg. No.	Description
422-11010	11010	Bead Breaker
422-12000	12000	Bead Breaker Kit. <b>INCLUDES:</b> 11010 Bead Breaker, 15000 Pump and 16040 Hose Assembly
422-12020	12020	Bead Breaker Kit. <b>INCLUDES:</b> 11010 Bead Breaker, 15920 Pump and 16040 Hose Assembly
422-16200	16200	Conversion Kit for Combi Bead Breaker

MODIFIED "COMBI" TIRE  
BEAD BREAKER

- Modified 11010, the most popular tool for breaking beads on all agriculture wheels
- Most affordable bead breaker for new 3 piece wheel assemblies • Modified jaw and feet allow for larger grab on larger wheel assemblies • Can be used on the front and back side of the wheel assembly • All parts (except for modified feet and jaw) can be interchanged with 11010

MOST  
POPULAR

Ascot No.	Mfg. No.	Description
422-11020	11020	Modified "Combi" Tire Bead Breaker

## PNEUMATIC BEAD BREAKER



- Recommended for agricultural, small OTR and most truck tires
- **EXTREMELY FAST:** saves time over conventional hydraulic bead breakers
- **LIGHTER WEIGHT THAN CONVENTIONAL BEAD BREAKERS:** only 17 lb. • Includes storage case • Requires a minimum of 85 psi



Ascot No.	Mfg. No.	Description
423-00101	GTABB-01	Pneumatic Bead Breaker

"COMBI" HYDRAULIC TIRE  
BEAD BREAKER

- The ESCO Professional Bead Breaker Series have become a staple in the tire service industry for well over 30 years
- Works on single, two and three-piece truck tires/rims
- Breaks beads in seconds using 15.8 tons of force
- Weighs 36 lbs. (16 kg)
- Also available in kits



Ascot No.	Mfg. No.	Description
422-10101	10101	Bead Breaker Tool
422-10200	10200	Bead Breaker Kit. <b>INCLUDES:</b> Bead Breaker, 3 1/2 qt. Turbo II Hydraulic Air Pump, Hose Assembly and Whip-Hose, Air Reducer
422-10201	10201	Bead Breaker Kit. <b>INCLUDES:</b> Bead Breaker, 2 1/2 qt. Turbo II Hydraulic Air Pump, Hose Assembly and Whip-Hose, Air Reducer
422-10202	10202	Bead Breaker Kit. <b>INCLUDES:</b> Bead Breaker, 5 qt. Turbo II Hydraulic Air Pump, Hose Assembly and Whip-Hose, Air Reducer
422-10825	10825	Bead Breaker Kit. <b>INCLUDES:</b> Bead Breaker, Yellow Jackit 5 qt. Plastic Air Pump, Hose Assembly and Whip-Hose, Air Reducer
422-10839	10839	Bead Breaker Kit. <b>INCLUDES:</b> Bead Breaker, Yellow Jackit 5 qt. Metal Air Pump, Hose Assembly and Whip-Hose, Air Reducer





## BEAD BREAKERS

### GIANT TIRE/EARTHMOVER TIRE BEAD BREAKER

- Use on 5-piece rims 15" to 51" without pry bar/bead loosening pockets
- Model 15000, 15920 or 15040 air/hydraulic pump recommended for operation
- Replaces Goodyear TO-100-HA

Ascot No.	Mfg. No.	Description
422-11040	11040	Giant Tire/Earthmover Tire Bead Breaker

### GIANT TIRE/EARTHMOVER TIRE BEAD BREAKER

- 4-1/4" stroke, 14-ton ram will break the toughest beads
- Use on 5-piece rim 25" to 51" with pry bar/bead loosening pocket
- Replaces Goodyear TO-1600-HA
- Same as IMT-1800
- Model 15000, 15020 or 15040 air/hydraulic pump recommended

Ascot No.	Mfg. No.	Description
422-11000	11000	Bead Breaker
422-12070	12070	Bead Breaker Kit. INCLUDES: 11000 Bead Breaker, 15000 Pump, 16040 Hose Assembly
422-12090	12090	Bead Breaker Kit. INCLUDES: 11000 Bead Breaker, 15920 Pump, 16040 Hose Assembly

### TITAN EARTHMOVER BEAD BREAKER

- Ideal for tire dealer who requires occasional use of bead breaker
- 10-ton cylinder has enough force to break most beads
- 4" (10 cm) stroke length
- Unit will work on 5 piece wheels with bead loosening pockets
- WEIGHT: 34 lbs. (15.5 kg)

Ascot No.	Mfg. No.	Description
422-11005	11005	Titan Earthmover Bead Breaker

### OTR GIANT TIRE BEAD BREAKER

- Compact, lightweight tool used primarily on 25" and 29" earthmover wheels
- Originally marketed as Goodyear TO-1600-HA
- Works only on 5 piece wheels with bead loosening pockets
- 2 1/8" (5.4 cm) stroke
- 10 tons of hydraulic force
- Used with 10,000 PSI (700 bar) air/hydraulic pump
- WEIGHT: 23 lbs. (10 kg)

Ascot No.	Mfg. No.	Description
422-11050	11050	OTR Giant Tire Bead Breaker



BREAKS TOUGHEST BEADS



The Giant Tire/Earthmover Tire Bead Breaker in use.

422-11000

422-11005



COMPACT & LIGHTWEIGHT

422-11050



### OTR 3000 GIANT TIRE BEAD BREAKER

- Designed specifically to work on Topy and Rimex OE wheels found on Terex, Komatsu, Liebherr and Le Tourneau
- Designed to prevent the tool from kicking out while under load
- 6" Stroke ram delivers maximum force
- New Universal Jaw design works on ALL wheels 51" - 63" • WEIGHT: 54 lbs. (24.5 kg)

Ascot No.	Mfg. No.	Description
422-11044	11044	OTR 3000 Giant Tire Bead Breaker



422-11044

### DUAL AGRICULTURAL TRACTOR TIRE BEAD BREAKER

- HEAVY DUTY: 10-tons of force breaks the toughest beads
- Breaks inside bead on outside dual farm tractor tires
- Requires just 3" of operating space between dual tractor tires
- Use with 10,000 PSI air/hydraulic pump • No need to remove outside wheel to change tire on outside dual



422-11060

Ascot No.	Mfg. No.	Description
422-11060	11060	Dual Agricultural Tractor Tire Bead Breaker

### GIANT TIRE/EARTHMOVER TIRE BEAD BREAKER

- Use on all 39", 45", 49", 51", 57" and 63" wheel sizes • In most cases you must first use Model 10105 or 10100 bead breaker to start the movement of the rim flange. Model 11030 can then be used • Model 15020 or 15040 air/hydraulic pump recommended for operation
- Replaces Goodyear TO-2000-HA

Ascot No.	Mfg. No.	Description
422-10103	11030	Giant Tire Earthmover Bead Breaker
422-12110	12110	Kit Contains 11030 Bead Breaker, 15040 Pump And 16020 Hose Assembly



422-10103

### DUAL AGRICULTURAL 300 TIRE BEAD BREAKER

- Designed for all agricultural applications • Lightweight and easy to handle • Requires only 4 1/2" (11.5 cm) operating space • 5 Tons of pushing force • Opens to 12" (30.5 cm) wide • WEIGHT: 20 lbs. (9kg)



422-11065

Ascot No.	Mfg. No.	Description
422-11065	11065	Dual Agricultural 300 Tire Bead Breaker

### TITAN FARM TIRE BEAD BREAKER

- Ideal for tire dealer who requires occasional use of bead breaker • 10-ton cylinder has enough force to break most beads • 4" (10 cm) stroke length
- Unit will break all single and 2-piece and most 3-piece wheels
- WEIGHT: 34 lbs. (15.5 kg)



FOR OCCASIONAL USE

422-11015

Ascot No.	Mfg. No.	Description
422-11015	11015	Titan Farm Tire Bead Breaker



### GIANT TIRE/EARTHMOVER BEAD BREAKER

- Use on 5-piece 25" to 51" with pry bar/bead loosening pockets
- Ram will break the toughest of beads
- Use with 10,000 PSI Hydraulic Pump



422-10100

Ascot No.	Mfg. No.	Description
422-10100	10100	Giant Tire/Earthmover Bead Breaker





## BEAD BREAKERS

### TITAN PRO MODIFIED COMBI BEAD BREAKER

- Compact design allows tool to be used on front or back of wheel
- Ideal to break large OTR 3-piece wheels
- Larger clamp and feet allow tool to easily clamp onto wheels
- Most parts interchange with common bead breakers in the market
- Designed for use on 25" multi-piece wheels
- Tire Sizes: 23.5x25, 26.5x25, 29.5x25 • 11 Ton
- 10,000 PSI (700 BAR)



Ascot No.	Mfg. No.	Description
422-11025	11025	Titan Pro Modified Combi Bead Breaker



### DIAMONDBACK ALUMINUM BEAD BREAKER KIT

- Lightweight Aluminum reduces weight by 40%
- Longer feet allow better fit onto wheel/rim
- Feet fully engage rim flange and push against the bead of the tire
- WEIGHT: 31 lb. (14kg)



Ascot No.	Mfg. No.	Description
422-11076	11076	Diamondback Aluminum Bead Breaker Kit

422-11076

LIGHTWEIGHT ALUMINUM



### STINGER BEAD BREAKER

- OTR Bead Breaker for heavy duty
- 3-piece rims that replace standard 5-piece rims
- Works on both front and back of wheel without dismounting wheel from vehicle
- Works on all new 3-piece 25" wheels or larger
- Works on all wheels with CAT "Shur-Lok" safety feature



Ascot No.	Mfg. No.	Description
318-11090	11090	Stinger Bead Breaker

318-11090

"SHUR-LOK" SAFETY FEATURE

### FLOOR TYPE BEAD BREAKER

- Use on custom wheels, without center holes, wide based motorcycle tires, ATV tires
- Used to prevent bending of wheels



PREVENTS BENDING OF WHEELS

421-00098

Ascot No.	Mfg. No.	Description	Tread Width	Weight
421-00098	T98	Deluxe	Up to 11"	28.5 lb.

### PORTABLE BEAD BREAKER

- Breaks beads on most sizes of passenger tires & light trucks



421-00100

Ascot No.	Mfg. No.	Description	Handle Length	Weight
421-00100	T100	Portable Bead Breaker	36"	5.2 lb.

### COMBI STYLE ALUMINUM BEAD BREAKER

- Lightweight aluminum construction
- 10 tons of bead breaking force
- Comparable to the Model #10101 Combi bead breaker
- To be used on 3-piece wheel assemblies
- Extended jaw for deep dish style wheels (extended flange)



422-40801

Ascot No.	Mfg. No.	Description
422-40801	40801	COMBI Style Aluminum Bead Breaker

### WINNTEC WHEEL BREAKER SET

- Provides a safe and easy way to loosen oxidized (stuck) wheels
- Simply place the ram between the duals or between the inside wheel & frame
- The manual pump allows the technician to feel how much pressure is being applied
- Adaptors included for wider work spaces



Ascot No.	Mfg. No.	Description
422-47180	G47180	Winntec Wheel Breaker Set

### 10-TON CHASSIS BEAD BREAKING KIT

- Great for use in multiple applications in the tire/wheel service market and many more
- Ideal for low clearance applications
- Easy snap in extensions
- Made of high quality steel
- Most versatile 10 Ton Ram on the market
- Easy to switch out extensions for optimal extension length
- Includes Carrying Case



422-10316

Ascot No.	Mfg. No.	Description
422-10316	10316	ESCO Stak-Able Hydraulic Ram Kit

### PRO SERIES 3 QUART AIR/HYDRAULIC PUMP

- Equipped with an air exhaust muffler for quiet pumping of air motor
- Air and oil inlet filters for reducing risk of damage from contamination
- Internal pressure relief valve system (load limit device) for overload protection
- Engineered with durable lightweight and corrosion resistant plastic components - increasing the life of the air motor and hydraulic pump
- Includes installable fluid level dip stick to check that the appropriate amount of hydraulic fluid is installed
- Hydraulic hose sold separately



Ascot No.	Mfg. No.	Description
318-10518	10518	ESCO Pro Series 3-Qt. Air/Hydraulic Pump

### SLIDE HAMMER BEAD BREAKER

- Protect your expensive wheels from swinging hammers by breaking the bead loose with this slide hammer
- Use only on wheels without a hump



Ascot No.	Mfg. No.	Description
427-12026	12026B	Slide Hammer Bead Breaker

PROTECTS WHEELS FROM DAMAGE

### IMPACT BEAD BREAKER

- Loosens the most stubborn beads with floating bead breaking foot and ram bar
- Forces wedge foot between head and rim flange
- Delivers blow directly to the tip
- Designed for shop or road use



LOOSENS STUBBORN BEADS



427-35926

427-45926

Ascot No.	Mfg. No.	Description	Length	Length Ext.	Weight
427-35924	T24B	Economy	46"	72"	13.5 lb.
427-35926	T26B	Heavy Duty	50"	80"	23 lb.
427-45926	35926-11	Impact Bead Breaker Replacement Grips			



### SPECIALTY IMPACT DRIVEN OFF-ROAD DEMOUNTER

- Safe, Easy and Fast way to demount the second bead on a wide range of tires with difficult stiff sides
- Works Great for Sprinkler and Off-Road Super Single Float Tires
- Pulls Wheel Off of the Tire
- Built to be used on tough Superwides
- 100% Pneumatic Tool - Can be used with Impact Gun
- Lightweight and build strong to withstand contact use



402-20418

Ascot No.	Mfg. No.	Description
402-20418	20418	Impact Driven Off-Road Demounter



## BEAD SEATING DEVICES



### RPG 5-GALLON BEAD SEATERS

- 5-gallon capacity
- Equipped with a butterfly valve for maximum air discharge
- Designed for commercial use on large truck tires, passenger and ATV tires to 24.5"
- Rubber foot pads to lessen vibration
- Made in Taiwan

Ascot No.	Mfg. No.	Description
473-01500	RPG-05GAL	5-Gallon Bead Seater with Butterfly Valve
473-02505	RPG-05GALED	5-Gallon Bead Seater with Butterfly Valve - End Discharge
473-02501	RPG-05GALAL	5-Gallon Bead Seater with Butterfly Valve - ALUMINUM

### RPG 10-GALLON BEAD SEATERS

- 10-gallon capacity
- Equipped with a butterfly valve for maximum air discharge
- Designed for commercial use on large truck tires, passenger and ATV tires to 24.5"
- Made in Taiwan

Ascot No.	Mfg. No.	Description
473-02510	RPG-10GAL	10-Gallon Bead Seater with Butterfly Valve
473-02511	RPG-10GALAL	10-Gallon Bead Seater with Butterfly Valve - ALUMINUM

### RPG 13-GALLON BEAD SEATER

- Aluminum tank
- 10-gallon capacity
- Equipped with a butterfly valve for maximum air discharge
- Designed for commercial large truck tires 24" to 54"
- Made in Taiwan

Ascot No.	Mfg. No.	Description
473-02513	RPG-13GALAL	13-Gallon Bead Seater with Butterfly Valve - ALUMINUM

### RPG BEAD SEATERS PARTS & ACCESSORIES

Ascot No.	Mfg. No.	Description
473-01502	RPG-05GAL-02	Safety Valve for RPG Bead Seater
473-01504	RPG-05GAL-04	Butterfly Valve for RPG Bead Seater
473-01505	RPG-05GAL-05	Threaded Barrel for RPG Bead Seater
473-01506	RPG-05GAL-06	Air Pressure Gauge for RPG Bead Seater
473-01507	RPG-05GAL-07	1-1/2" Pipe Nipple for RPG Bead Seater
473-01508	RPG-05GAL-08	1-1/2" Lock Nut for RPG Bead Seater
473-01509	RPG-05GAL-09	90° NPT Elbow for RPG Bead Seater
473-01510	RPG-05GAL-10	Ball Valve for RPG Bead Seater
473-01511	RPG-05GAL-11	Rubber Pad for RPG Bead Seater



Ascot No.	Mfg. No.	Description
473-01512	RPG-05GAL-12	Rounded Head Bolt for RPG Bead Seater
473-01513	RPG-05GAL-13	Handle for RPG Bead Seater
473-01514	RPG-05GAL-14	Handle Nut for RPG Bead Seater
473-01515	RPG-05GAL-15	Valve Body for RPG Bead Seater



### 38-LITER BEAD BOOSTER

- Newly-patented Turbo Barrel option delivers even greater volume of air by drawing surrounding air into the tire chamber upon firing
- 38L (10-gallon) Bead Booster™ for larger tires
- 2" RAR Valve release for added release velocity
- Aluminum tank weighs only 28 lbs.
- Includes new trigger safety

Ascot No.	Mfg. No.	Description
473-00038	GB38L	38-Liter Bead Booster w/ Jet Assisted Barrel



### VIPER™ BEAD SEATERS

- Push button discharge
- Unique handle design for stability and control
- ASME Certified
- Rapid release of air
- Newly designed jet barrel for greatly increased air volume delivery
- More power less air pressure
- Reduces air noise
- Greater air distribution
- No wheel damage
- Works on large range of tires

Ascot No.	Mfg. No.	Description
473-01110	VP 10S	Viper™ 11.5 Liter Bead Seater, Steel Tank
473-01113	VP 13AL	Viper™ 13 Liter Bead Seater, Aluminum Tank
473-01118	VP 18AL	Viper™ 18 Liter Bead Seater, Aluminum Tank



\*Please note we recommend the use of a good quality inline filter to remove contaminants and moisture.  
\*Please note we recommend the use of silicone spray or air tool oil occasionally to properly maintain the valve.



## BEAD SEATING DEVICES



### 5-GALLON CHEETAH BEAD SEATER

- Makes seating the most difficult bead safe and simple
- 5-gallon capacity • **APPLICATIONS:** Designed for commercial use on large truck tires, passenger and ATV tires to 24.5" • Fill tank from any service station chuck or service truck air compressor



473-00500

Includes easy carry handle for portability  
Features a 5-gallon ASME-certified steel tank w/powder coat finish for durability

Quick-release 1-1/2" butterfly valve allows for full impact of air discharge into tire

Lip on threaded barrel allows for proper angle for air insertion for correct bead seating

1/4" air inlet shutoff valve allows for the correct amount of air for the size of tire being seated

Pneumatic gauge makes it easy to fill the correct amount of air for the size of tire being seated

Included mounting feet makes storing the unit easy and helps protect the barrel assembly from damage (not shown)

Ascot No.	Mfg. No.	Description
473-00500	CH-5	Cheetah Bead Seater, 5-Gallon
473-00501	CH-5AL	Same As Above With Aluminum Tank

### 10-GALLON CHEETAH BEAD SEATER

- 10-gallon capacity with ASME certified tank • **APPLICATIONS:** Designed for small rear agri/grader or smaller tires; Standard for fleet work, farm and service trucks



473-00010

Ascot No.	Mfg. No.	Description
473-00010	CH-10	10-Gallon
473-00011	CH-10AL	10-Gallon With Aluminum Tank

### 13-GALLON CHEETAH BEAD SEATER

- 13-gallon capacity with ASME certified tank
- **APPLICATIONS:** Seats bead on tractor & heavy equipment tires from 24.5" to 34" • Includes a straight barrel, new Magnum barrel (for larger tires) and safety goggles as standard equipment
- Extends tire service capability not possible with smaller units



473-00013

Ascot No.	Mfg. No.	Description
473-00013	CH-13AL	13-Gallon With Aluminum Tank

### BS-07 CHEETAH BEAD SEATER

- "End of Tank" discharge design, flared discharge barrel and a 2" discharge valve for maximum bead seating power
- Makes seating the most difficult bead not only safe but simple, fast and economical • 5-gallon capacity, ASME certified tank
- **SIZE:** 34"(L) x 12"(W) x 15"(H)



473-00207

Ascot No.	Mfg. No.	Description
473-00207	BS-07	BS-07 Cheetah Bead Seater

MAX BEAD SEATING POWER

### CHEETAH BEAD SEATER REPLACEMENT PARTS



Ascot No.	Mfg. No.	Description	Ascot No.	Mfg. No.	Description	Ascot No.	Mfg. No.	Description
473-01104	'01.10.4	1-1/2" Pipe Nipple for Cheetah Bead Seaters	473-02103	'02.10.3	1-1/2" Threaded Barrel for Cheetah Bead Seaters	473-03104	'03.10.4	90° NPT for Cheetah Bead Seaters
473-01106	'01.10.6	Pressure Gauge for Cheetah Bead Seaters	473-02106	'02.10.6	Magnum I Barrel for Cheetah Bead Seaters	473-03106	'03.10.6	Magnum II Barrel for Cheetah Bead Seaters
473-01107	'01.10.7	3/4" - 1/4" Bushing for Cheetah Bead Seaters	473-02107	'02.10.7	1-1/2" Lock Nut for Cheetah Bead Seaters	473-04103	'04.10.3	Ball Valve for Cheetah Bead Seaters
473-01109	'01.10.9	Cheetah Air Hose Assembly	473-03102	'03.10.2	2" Discharge Valve for Cheetah Bead Seaters	473-05102	'05.10.2	Safety Release Valve for Cheetah Bead Seaters
473-01230	'01.23.0BT	Handle & Nut for Butterfly Valve for Cheetah Bead Seaters	473-03103	'03.10.3	2" Barrel for Cheetah Bead Seaters	473-06813	'6813	Flared Barrel for BS-07 for Cheetah Bead Seaters
473-02102	'02.10.2	1-1/2" Discharge Valve for Cheetah Bead Seaters						



### HURRICANE HIGH-FORCE BEAD SEATERS

- All models equipped with robust air tanks, cast out of aluminum and ASME certified • Lightweight hassle-free, simple solution to seat the beads on small ATV up to OTR-sized tires • **Fast, easy and powerful push button style discharge system** • Designed to support full control of tank while seating tire/wheel • "High-Force" Discharge Barrel for precise, maximum air release for best seating of the bead the first time • **Safety glasses and ear protection included • Maximum PSI: 165 PSI**
- **Recommended Operating Pressure: 40-155 PSI**



473-20387

473-20388

Ascot No.	Mfg. No.	Description	Weight	Dimensions	Applications
473-20387	20387	Hurricane Cat-5 Push Button Alum Bead Seater, 5-Gallon	19 lbs.	30" x 11" x 12.5"	Small and passenger tires
473-20388	20388	Hurricane Cat-9 Push Button Alum Bead Seater, 9-Gallon	23 lbs.	28" x 14" x 14.5"	Most commercial tire sizes, skid steers & some tractor tires
473-20389	20389	Hurricane Cat-13 Push Button Alum Bead Seater, 13-Gallon	24 lbs.	31" x 14" x 15"	Heavy-duty truck applications, most construction & agricultural tires

FULLY SERVICEABLE 2" DISCHARGE VALVE

ROBUST AIR TANKS



## BEAD BAZOOKA®

- Smaller and more powerful than previous designs
- Serviceable/Replaceable 2" RAR valve
- Utilizes ultra-compact design
- Anti-corrosion interior tank coating
- Perfect for motorcycle, cars, or light commercial vehicle tire service (3L2)
- Perfect for cars and commercial vehicle tire service (6L2)
- Perfect for commercial and light agricultural vehicle tire service (10L2)

## BEAD SEATING DEVICES

SMALLER  
& MORE  
POWERFULUPGRADED  
RELEASE  
VALVE

## BEAD BAZOOKA®



473-00103



473-00106



473-00110

The Bead Bazooka®  
3L2 in use.

## BEAD BAZOOKA® SPARE PARTS:

Ascot No.	Mfg. No.	Description
473-12913	12913B	Slotted Double Barrel
473-12914	12914B	Pressure Gauge
473-12915	12915B	Y-Connect
473-12916	12916B	Intake Valve
473-12917	12917B	Safety Valve
473-12919	12919B	Switch Valve
473-12920	12920B	Grip with Trigger Guard
473-12921	12921B	Plastic Plug
473-12923	12913BC	Slotted Double Barrel without Clip
473-12930	12930M	F3 Connector



473-00100



473-12914



473-12930



473-12917



473-12916



473-12923

JET PAK BEAD SEATER  
UPGRADE DEVICE

- Faster and easier than standard ball or butterfly discharge valve operation • Discharges tank with the press of a button • Safety cover prevents accidental trigger release
- **TWO PORT SIZES AVAILABLE:** CH1.5JP (1.5") and CH2.0JP (2") to fit any standard bead seater in a variety of tank sizes • Attaches easily to existing pipe nipple, replacing manual discharge valve • Includes our new improved Jet Barrel (VP 3.103 or VP 2.103) for greater air volume delivery • Comfortable handle assures firm grip and ease of use
- All internal components can be removed and serviced if required



473-00020

GREATER  
AIR  
VOLUMEGAITHER RAR VALVE  
UPGRADE KITS

- The Gaither RAR Valves are the most powerful inflation valves available - same as used on the popular Bead Bazookas • 1.5" and 2" available to upgrade your current inflation tank • Completely serviceable!! This means that if something should become defective down the road, the seal, valve, spring or all three can be replaced!
- Push-button release trigger allows technician to keep both hands on the tank for optimum control during use
- Reversible handle allows for both right hand and left hand users based on preference • Each valve includes a barrel for immediate use after installation



473-12941

473-12942

EASY-LIFT™ BEAD  
SEATING STAND

- Portable for field service, or can be bolted to the floor • With hub facing out, simply roll mounted tire and wheel assembly to front of stand • Push assembly onto crown - tire and wheel will automatically fall onto center of stand and rest with bead centered on bottom wheel flange • Seat beads by inflating tire to 4 PSI (max.) • Step around stand and easily lift assembly into vertical position • Roll assembly into tire inflation safety cage for final inflation • **SIZE:** 4"H x 26"W x 27"L
- Made of high grade steel

HIGH  
GRADE  
STEELPORTABLE  
IF NEEDED

473-36016

MADE IN THE  
USA

Ascot No.	Mfg. No.	Description	Ascot No.	Mfg. No.	Description
473-00020	CH-2.0JP	Jet Pak Bead Seater Upgrade Device - 2" Port Size	473-12941	12941R	1.5" RAR Valve Upgrade Kit
473-00015	CH-1.5JP	Jet Pak Bead Seater Upgrade Device - 1.5" Port Size	473-12942	12942R	2" RAR Valve Upgrade Kit

Ascot No.	Mfg. No.	Description	Weight
473-36016	36016	Std. Crown for 8-3/4" Dia. Hubs	16,000 lb.
473-36017	36017	Large Crown for 11" Euro Hubs	12,000 lb.



## BEAD SEATING DEVICES



### GAITHER'S BEAD SAVER SYSTEM

• By using simple principles of leverage, the Bead Saver System actually works with tire and rim to do the work for you • Patented design • Safest, fastest, easiest way ever invented to change tubeless truck tires • Guaranteed not to damage tire beads

SAFE,  
FAST &  
EASY  
SYSTEM

PATENTED  
DESIGN

Ascot No.	Mfg. No.	Description
448-12880	12880	Bead Saver System



448-12880

### PNEUMATIC BEAD EXPANDERS

• Fits most bias ply passenger tires • Pliable neoprene rubber tube encased in tough nylon cover • Withstands contact with oil, grease, solvents and acid

Ascot No.	Mfg. No.	Min./Max. Diam.	Tube Diam.	Weight
471-31432	31432	24"-34"	2-1/4"	2.8 lb.
471-31433	31433	22"-32"	3/4"	.75 lb.



448-00001

### GAITHER J1 MOUNT/DEMOUNT TOOL

• Slightly altered and condensed version of the original Bead Saver System • 2-piece system that mounts and dismounts all standard 19.5", 22.5" and 24.5" tubeless tires up to a 315/80R22.5, including those mounted on aluminum wheels • Differs from the original system in that each process is done completely while the tire is flat on the ground • The first Bead is dismounted with the clevis & crook/spoon end • The second Bead is dismounted with the J-1 end without picking the tire up • The first bead can be mounted with the J-1 end • The second Bead is mounted with the spoon end • Two Beadkeepers can be used to assist with mounting

Ascot No.	Mfg. No.	Description
448-00001	J1	Mount/Demount Tool

### GAITHER SUPER SLICK'EM™

• Gaither's Super Slick'em™ should be applied to all tires before being mounted or before deflation if being dismounted • Super Slick'em™ is a special non-water based lubricant that penetrates and aids in breaking the tire bead from the wheel by eating away rust and grease. Because it does not contain water, Super Slick'em™ will not freeze or cause rust to form • SUPER SLICK'EM™ 12904 INCLUDES: 4-1 gallon (3.8 liter) containers and 1 applicator bottle



WILL NOT  
FREEZE

421-12904

Ascot No.	Mfg. No.	Description
421-12904	G12904	Gaither Super Slick'em™



### 5-GALLON BEAD BOOSTER

• Creates a blast of air used for seating tubeless tire beads  
• Release valve safety lock prevents inadvertent discharge  
• Powder-coated inside and out to protect from rust and deterioration caused by moisture • Double Barrel directs the air around the tire for a better "lift"  
• Safety pop-off valve prevents overloading with too much air pressure

473-00005

Ascot No.	Mfg. No.	Description
473-00005	GB-5Z	5-Gallon Bead Booster



DOUBLE  
BARREL

### 5-GALLON BEAD BOOSTER WITH MIS VALVE

• The BEAD BOOSTER® GB-5M comes equipped with the same MIS valve as the famous BEAD BAZOOKA® Tommy Gun giving it the ability to seat almost any tire • CE/ASME certified tank • New MIS valve with a 2" opening • Internal proprietary coating protects against rust • Includes Gaither's trusted 3 year warranty



473-42561

EQUIPPED  
WITH MIS  
VALVE

Ascot No.	Mfg. No.	Description
473-42561	GB-5M	5-Gallon Bead Booster with MIS Valve

### YELLOW RUBBER COATED BEADKEEPER

• Keeps truck tire bead from slipping during mounting of top bead • Rubber coated steel construction • Will not scratch aluminum wheels • Great for hard to mount tires, a must for all super singles • Equivalent to Gaither 12894C & ESCO 70140

Ascot No.	Mfg. No.	Description
448-12894	12894C	Yellow Rubber Coated Beadkeeper



448-12894

### BLUE WIDE MOUTH RUBBER COATED BEADKEEPER

• Wider mouth works on newer, wider Alcoa wheels • Keeps truck tire bead from slipping during mounting of top bead • Rubber coated steel construction • Will not scratch aluminum wheels • Great for hard to mount tires, a must for all super singles • Equivalent to Gaither 12894-CW

Ascot No.	Mfg. No.	Description
448-32894	12894-CW	Wide Mouth Blue Rubber Coated Beadkeeper



448-32894

### STEEL BEADKEEPER

• THE ORIGINAL BEADKEEPER® • Used to hold a tire bead in place during the mounting process • Eliminates the need to stand on the tire and/or use a second mounting bar

Ascot No.	Mfg. No.	Description
448-22894	12894	Steel Beadkeeper



448-22894

### BEADKEEPERS-ON-A-ROPE

• Used to hold the tire in place while mounting the second bead • These tools eliminate the dangerous job of standing on the tire in order to mount it • After the first bead is mounted, simply place two Beadkeepers on the flange of the wheel and spread them apart as far as possible; Use the Spoon End of the bar to mount a small part of the bead and slide the closest Beadkeeper to the bar; Repeat this step until the entire second bead is mounted

Ascot No.	Mfg. No.	Description
448-42894	12894-P	Beadkeepers-On-A-Rope



448-42894



## VALVE ADAPTER GUN

- Will attach to any calcium tire filling pump • 1/2" female pipe thread • Will extract valve core from a standard bore valve or core housing from tractor valve • Securely holds valve core or core housing up in the gun body during the filling or evacuation of liquid from tire



464-00310

4-WAY  
VALVE

Ascot No. Mfg. No. Description

VALVE ADAPTER GUN PARTS		
464-00134	FP-134	Large Bore Core Remover
464-00135	FP-135	Adapter For Standard Valve
464-00136	FP-136	O-Ring For FP-135
464-00137	FP-137	Standard Valve Core Remover
464-00138	FP-138	Ejector Union With FP-136 O-Ring
464-00139	FP-139	Gasket
464-00140	FP-140	Stem
464-00141	FP-141F	Adapter Body
464-00142	FP-142	Stem Sealing Nut
464-00143	FP-143	O-Ring For FP-142
464-00144	FP-144	Hand Wheel
464-00145	FP-145	Lock Nut
464-00146	FP-146	Teflon Gasket

Ascot No.	Mfg. No.	Description
464-00310	310	Valve Adapter Gun

## CHLORIDE PUMPS


**MTP, Inc.**  
 CALCIUM CHLORIDE PUMP

- Now available with polyvinyl valve (Model #10509) or anodized aircraft aluminum valve (Model #10509M) • Pumps 34 gallons of calcium chloride per minute • Newly designed valve will not leak • Spring reinforced hoses for fill and evacuate • Comes complete with valve adapters for all valves (large bore and standard) • Gauges are protected • Unit is portable or can be mounted in tire service trucks • Double diaphragm pump, 1 to 1 ratio • 10' hoses gives plenty of room to operate • Includes hoses & calcium tire filled gun • USA MADE PUMP



475-11590

Ascot No.	Mfg. No.	Description
475-10509	10509	Calcium Chloride Pump with Polyvinyl Valve
475-11590	10509M	Calcium Chloride Pump with Aircraft Aluminum Valve

## GRACO CALCIUM CHLORIDE PUMP

- 50-gallon (189 liter) per minute capacity; 1 to 1 ratio double diaphragm pump • WEIGHT: 38 lb. (17.2 kg) • Pump only P/N 15091, pump with quick connectors 15090-Q



475-15090

Ascot No.	Mfg. No.	Description
475-15090	15090	GRACO Calcium Chloride Pump

DOUBLE DIAPHRAGM  
CALCIUM CHLORIDE PUMP

- No lubrication required
- Self-priming, non-stalling, low noise level
- Diaphragms have no stress points and less flex for longer life
- No gradual loss of pump performance due to wear
- Can run dry indefinitely
- Protected by an air filter/regulator
- 35 gallon per minute free flow



475-30280

475-30281

Ascot No.	Mfg. No.	Description
475-15103	15103	Double Diaphragm Calcium Chloride Pump
475-30280	A3028	Replacement 4-Way Valve for Calcium Chloride Pump
475-30281	HL-B	Replacement Handle for Calcium Chloride Pump 4-Way Valve

## "WONDER PUMP" PNEUMATIC DOUBLE DIAPHRAGM CALCIUM CHLORIDE PUMP

- No lubrication required • Self-priming; non-stalling; low noise level • Diaphragms have no stress points and "less flex" for longer life • No gradual loss of pump performance due to wear • Can run dry indefinitely
- Protected by an air filter/regulator • 4-WAY VALVE: 1/4 turn reverses the flow
- no need to change hoses
- 35 gallon per minute free flow



475-18001

Ascot No.	Mfg. No.	Description
475-18001	30A Plus	1" Capacity Standard Package



Ascot No. Mfg. No. Description

"WONDER PUMP" PARTS & ACCESSORIES		
475-13011	30A-11	310 Calcium Gun
475-13018	30A-18	3/4" Brass Quick Coupler-Hose Saver
475-13019	30A-19	3/4" Brass Plug - Hose Saver (Needed for 30A-18)
475-13021	30A-21	1/2" Brass Quick Coupler - Calcium Gun
475-13022	30A-22	1/2" Brass Plug - Calcium Gun (Needed for 30A-21)
475-13026	30A-26	1/8" Back Mount Air Gauge - 0-100 PSI
475-13027	30A-27	2-1/2" Dia. S.S. 1/4" Back Mount Press/Vac Gauge - 30/0/150 Glycerin Filled
475-82515	682515	Extra Large Exhaust Muffler
475-13028	30A-28	3/4" Brass 4-Way Directional Valve w/ O-Ring Seals w/ Handle for 30A-28
475-13030	30A-30	10' Supply Hose (3/4" x 1" MPT Ends) 300 PSI - Wingfoot
475-13031	30A-31	15' Fill/Evac Hose (3/4" x 1/2" MPT Ends) 300 PSI - Wingfoot
475-13032	30A-32	PVC Suction Bypass Hose for Silver Pump
475-13033	30A-33	1" FPT Stainless Steel Strainer for 30A-30 Prior to 2002
475-13034	30A-34	3/4" FPT Stainless Steel Strainer for Current 30A-Plus
475-12532	25A-32	PVC Bypass Hose for Black Pump




## MOUNT/DEMOUNT TOOLS



## GOLDEN TOOL TUBELESS TRUCK TIRE MOUNT DEMOUNT TOOL

• Demounts most tubeless tires in 8 seconds with ease - remount them in 20 seconds with equal ease - all without the need to lift tire and rim to remove rear bead • Demounts/ mounts 17.5" to 24.5" tires • **APPLICATIONS:** Use on all tubeless truck tires including super single/ duplex tires, radial and bias • For Dayton-type wheels (centerless) and Budd type disc wheels • Eliminates the need to lift tire and rim to remove the bottom bead, preventing possible strain or even serious injury

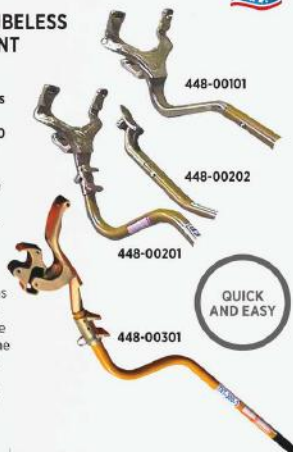

Ascot No.	Mfg. No.	Description
448-00100	TNT-100	Tire Mount/ Demount Tool Complete
448-00101	TNT-100-1	Demount Tool Only
448-00200	TNT-200	Super Single Tire Mount/ Demount Tool
448-00201	TNT-200D	Super Demount Tool
448-00202	TNT200M	Single Mount Tool
448-00301	TNT-300-1	New 445 Super Single Demount Tool



## GOLDEN BUDDY TIRE CHANGING SYSTEM

• Mount and demount tool assemblies for 22.5 & 24.5 tires/wheels • Heavy duty steel construction ensures long life • Nylon rollers protect the bead • Bead holder • **WEIGHT:** 32 lb. (14.5 kg) • Sold as a complete set



Ascot No.	Mfg. No.	Description
448-12320	71050	Golden Buddy Tire Mount/ Demount Tool Set
448-22320	71051	Golden Buddy Dismount Assembly
448-32320	71052	Golden Buddy Mount Tool Assembly



## EASY BUDDY TIRE DEMOUNT TOOL

• Mount and dismount tire assemblies for 22.5 and 24.5 tires/wheels • Easy-to-follow instructions • **WEIGHT:** 35 lb. (16 kg) • Includes top bead removal tool and bottom bead removal tool • Includes Rim Protector to prevent rim scarring



Ascot No.	Mfg. No.	Description
448-71000	71000	Easy Buddy Tire Demount Tool

## STEEL TRUCK BEAD HOLDER

• Clamps securely to the wheel to prevent tire from "walking" • Eliminates the use of vise grips which can damage wheels • For use with automatic tire changers and/or manual tire changing tools • Heavy duty steel construction



Ascot No.	Mfg. No.	Description
448-00010	BJ-BP10	Steel Truck Bead Holder

## BL-100 BEAD LOCK

• Helps prevent bead damage • Large roller directs bead into drop center, making tire mounting easier • Prevent damage to rims • Tool will not slip or dislodge during the mounting process



Ascot No.	Mfg. No.	Description
448-01100	BL-100	Bead Lock

## TIRE MOUNT/DEMOUNT IRONS



• Many sizes for use on truck, agricultural and industrial tires • **APPLICATIONS:** Straight and offset tire irons for use on large, wide-base tires; T45 series for use on standard truck tires • New 402-45005 allows the professional to lift the bead over the rim with less effort than conventional methods

Ascot No.	Mfg. No.	Length	Stock	Weight
402-45003	T45A	37"	3/4"	4.6 lb.
402-45005	T45A-2000K	38"	3/4"	5 lb.
402-45004	T45HD	41"	7/8"	7 lb.
402-47001	T47A	52"	1"	11 lb.



## TIRE DEMOUNTING TOOL &amp; KITS

• Removes both top and bottom bead from short side - no need to flip tire/rim • Demounts 22.5" to 24.5" tubeless truck tires with ease • Including most radial and bias ply tires • Demounts tire in 8 seconds • Also available as a kit to include demounting tool, mounting tool and bead holder

402-00100  
ESC100  
Demounting  
Tool

Ascot No.	Mfg. No.	Description
402-00100	90518-100-1	ESC100 Tire Demounting Tool
402-00101	90518-100-KIT	ESC100 Demount & Mounting Tool Kit. Includes: 100 Demounting Tool, 100 Mounting Tool, 70141 Bead Holder
402-00200	90518-200-1	ESC200 Tire Demounting Tool
402-00201	90518-200-KIT	ESC200 Demount & Mounting Tool Kit. Includes: 200 Demounting Tool, 200 Mounting Tool, 70141 Bead Holder

## MTP, Inc.

## TUBELESS TRUCK TIRE DEMOUNT TOOL

• High Quality, economical price • Nylon rollers • 3-Step demount of 22.5 and 24.5 tires • Parts Available



Ascot No.	Mfg. No.	Description
448-00400	EZT-100D	Tubeless Truck Tire Demount Tool



## TYR-X TRUCK TIRE DEMOUNT SYSTEM

• A safe, quick, and reliable tire demounting tool that makes tire demounting a simple process • The pivot hooks ensure easy and positive operation and its design eliminates aggressive stretching of the tire bead • One of the easiest and fastest manual truck tire demounting tool on the market • Works on standard truck tires (22.5-24.5) and can be used for the first bead of super singles or double wide truck tires • **WEIGHT:** 17 lb. (8 kg)



Ascot No.	Mfg. No.	Description
402-20416	20416-A	Demount Truck Tire Tool Kit. <b>INCLUDES:</b> 20396, 20397, 20430, 20406
402-20396	20396	Demount Tool, Truck Tire, "Tyr-X", All In One Demount System
402-20397	20397	Bead Wedge (Puts Tire in Drop Center)
402-20406	20406	Bead Holder, Commercial Truck Tires (Pair)
402-20430	20430	Mounting Bar, Truck Tires

## PLATINUM DEMOUNT TOOL

• Demounts tire sizes 17.5" - 24.5" • Only a single tool needed to demount tires • Eliminates the need to lift the tire and heel making a hard job easy and protecting against insurance claims • Unique design protects valuable tire casings for retreading • Handle design protects against damage to the tool and other objects that may come in contact



Ascot No.	Mfg. No.	Description
448-12100	G12100	Platinum Demount Tool



## MOUNT/DEMOUNT TOOLS



## IRONMAN™ ERGONOMIC WHEEL LIFTING BAR

- Easily and safely lift heavy, awkward truck tire and wheel assemblies • Extremely useful in outdoor conditions when truck tire and wheel assemblies can become wet & slippery
- Protect your workers and yourself: reduce injuries & claims, keep insurance premiums down
- Specially designed forged ends work from either side of the wheel assembly as it lays flat
- **APPLICATIONS:** Lift all sizes and types of small and large heavy truck wheels: Standard sizes including 22.5" and 24.5" wheels, plus European (which have 1" lug holes), Super Wide and even the Super Single (a 340 lb. assembly) size

EASY AND SAFE TO USE

LIFT ALL SIZES &amp; TYPES OF TIRES

402-34950



The Ironman™ Ergonomic Wheel Lifting Bar in use.

Ascot No.	Mfg. No.	Length	Weight
402-34950	34950	58"	10 lb.

## NINETEEN-FIVE™ TIRE MOUNTING &amp; DEMOUNTING TOOL SET FOR 19.5" TRUCK TIRES

- New tire bar uniquely designed to work on hub side of wheel, where hub protrudes above rim • Specially designed ends manipulate tire with less effort • Forged from high-grade carbon steel and heat-treated for longlasting strength and durability
- **APPLICATIONS:** Specially designed Bead Holder to hold bead on 19.5" aluminum wheels • Solid brass Bead Holder for steel wheels • Aluminum Wheel Protector - thick leather pad helps protect rims from marring and scratching

Ascot No.	Mfg. No.	Description	Length	Weight
-----------	----------	-------------	--------	--------

## NINETEEN-FIVE™ TIRE MOUNTING &amp; DEMOUNTING TOOL SET

402-33195	33195	Nineteen-Five™ Tire Mounting and Demounting Set. <b>INCLUDES:</b> 31710, 31810, 33196, 33199		
472-31710	31710	Bead Holder for Steel Wheels - Solid Brass	4-1/2"	2.5 lb.
472-31810	31810	Aluminum Wheel Protector - Leather	6"	3.4 lb.
402-33196	33196	Bead Holder for 19.5" Aluminum Wheels	7-1/2"	3 lb.
402-33199	33199	Tire Mounting/ Demounting Tool	38"	2.5 lb.

## BEAD HOLDER

- Holds the bead in place against the wheel when mounting the tire on the wheel • 31713 Bead Holder works on Super Singles and Super Wides

Ascot No.	Mfg. No.	Material	Stock	Weight
472-31710	31710	Solid Brass	1.4 lb.	1.8 lb.
472-31713	31713	Aluminum Bead Holder - Works on Super Singles		

## ALUMINUM WHEEL PROTECTOR

- Protects wheel rims from damage
- U.S. Patent No. 6,991,018

Ascot No.	Mfg. No.	Weight
472-31810	31810	12 lb. (5.4 kg)



## BLUE COBRA™ TRUCK TIRE DEMOUNT TOOL

- Ergonomic shaped steel handle with no-slip grip for optimum leverage • **APPLICATIONS:** Change nearly any 20", 22.5" and 24.5" tube-type and tubeless truck tires, up to a 13" wide one-piece wheel

Ascot No.	Mfg. No.	Length	Weight
402-35440	35440	54"	22 lb.




## SUPER SERPENT DEMOUNT TOOL

- At only 5-1/2 pounds, this unique, lightweight demount tool for super singles can be lugged around on a fingertip
- Delivers incredible leverage right where it's needed



Ascot No.	Mfg. No.	Length	Stock	Weight
402-02006	T2006	37"	3/4"	5.5 lb.



## TIRE SPOONS

- General purpose tire irons for all mounting and demounting needs • **APPLICATIONS:** Use 18" and 24" spoons to mount or demount passenger car, motorcycle, ATV and light truck tires; 30" spoons provide enough strength and leverage to work on large truck, bus, off-road vehicle, tractor and aircraft tires

Ascot No.	Mfg. No.	Length	Stock	Weight
<b>A. STRAIGHT</b>				
402-32101	T1X	18"	11/16"	1.8 lb.
402-32119	T19	24"	11/16"	2.5 lb.
402-33022	33022	30"	3/4"	3.4 lb.
402-33219	T19A	30"	11/16"	3 lb.
402-33238	T38	30"	7/8"	4.8 lb.

<b>B. DROP-CENTER</b>				
402-02100	T21R	18"	11/16"	1.8 lb.
402-02101	T21F	24"	11/16"	2.5 lb.
402-02102	T21HD	30"	7/8"	4.5 lb.
402-33020	33020	30"	11/16"	3.1 lb.
402-33024	33024	30"	3/4"	3.4 lb.

<b>C. CURVED</b>				
402-31820	31820	18"	11/16"	1.8 lb.
402-32102	T2X	18"	11/16"	1.8 lb.
402-32120	T20	24"	11/16"	2.4 lb.
402-32420	32420	24"	11/16"	2.5 lb.
402-33021	33021	30"	11/16"	3.1 lb.
402-33052	33052	30"	3/4"	3.1 lb.
402-33062	33062	30"	7/8"	3.4 lb.
402-33220	T20A	30"	11/16"	3.1 lb.
402-33239	T39	30"	7/8"	4.5 lb.



A B C

GENERAL PURPOSE TIRE IRONS

HEAVY DUTY &amp; DURABLE



## TIRE DEMOUNT TOOL

- Demounts both beads on most truck tires with the need for lifting the tire/wheel assembly off the ground and then dropping it • Heat-treated alloy steel for maximum durability and strength

HEAT-TREATED ALLOY STEEL

STRONG AND DURABLE

402-02001

Ascot No.	Mfg. No.	Length	Stock	Weight
402-02001	T2001	39"	3/4"	6.5 lb.

## TIRE MOUNT TOOL

- Wing shaped designed to stop against rim, remove itself from between rim and bead • Small end gets under stretched bead for last pull

WING SHAPED DESIGN

402-02002

Ascot No.	Mfg. No.	Length	Stock	Weight
402-02002	T2002	38"	11/16"	4 lb.

## SUPER SERPENT MOUNT TOOL

- It may seem funny looking, but every inch of this innovative design is purely serious • Delivers twice the leverage of any "Straight-type" tire mounting tool

402-02005

Ascot No.	Mfg. No.	Length	Stock	Weight
402-02005	T2005	37"	3/4"	6.6 lb.



PROUD PARTNERS FOR OVER 50 YEARS!

**Ken-Tool**  
WHEREVER TIRES ARE CHANGED™

**TG11E**  
FIBERGLASS  
HANDLED WEDGE

**T45A**  
TIRE IRON

**ASCOT**  
Supply Corporation

**TIRE MOUNT/  
DEMOUNT  
SPOONS**

STRAIGHT, DROP-CENTER,  
CURVED,  
CURVED WITH FLAT



**Mega**  
AIRBLAST™  
BEAD SEATING TOOLS

**PREMIUM DIGITAL  
TIRE INFLATORS**

24" OR 12" HOSE, CLIP-ON CHUCK AND 8" DUAL  
FOOT CHUCK INCLUDED.

**LOCKING RING TOOLS**



**CLASSIC TUBELESS TIRE IRON**

• Ken-Tool's patented designs offer one-piece construction and assure long life for many tire changing applications • **TIP ENDS** insert easily and will not cut or rip bead or sidewall • These designs make it easier to mount and demount tires without changing the way the tool is used • **MOUNT END:** Precision-forged knob grips rim. Tip designs won't slip during tire mounting. Special curve design always grabs the bead edge • **DEMOUNT END:** Precision-forged angled tip slides between bead and rim easily. Forged design won't slip when demounting the second bead

TIP ENDS  
INSERT  
EASILY

PRECISION-  
FORGED  
ENDS



402-34645

Ascot No.	Mfg. No.	Length	Stock	Weight
402-34645	T45AC	37"	3/4"	4.6 lb.
402-34649	T45AS	52"	7/8"	8.25 lb.

**TUBELESS TIRE IRON SETS**


• Sets provide all irons necessary for a variety of tire changing applications • **APPLICATIONS:** Use C bar with the B extension bar for easier use on large, wide-base truck tires; Use on standard and large truck tires, including industrial, farm, buses and tractors

Ascot No.	Mfg. No.	Description	Length	Stock	Weight
<b>ADAPTER PLUGS</b>					
402-46000	T46	Tire Iron Set. <b>INCLUDES:</b> T46A, T46B, T46C	—	3/4"	12 lb.
402-46001	T46A	Med. Duty Mount/Demount Iron	36"	3/4"	4.5 lb.
402-46002	T46B	Mount/Demount Iron	36"	3/4"	4.5 lb.
402-46003	T46C	Offset Bar For Deep Well Tires	22"	3/4"	3 lb.
<b>HEAVY</b>					
402-47000	T47	Tire Iron Set. <b>INCLUDES:</b> T47A, T47B, T47C	—	1"	29 lb.
402-47001	T47A	Ultra Duty Mount/Demount Iron	52"	1"	11 lb.
402-47002	T47B	Mount/Demount Iron	49-1/2"	1"	11 lb.
402-47003	T47C	Offset Bar For Deep Well Tires	27"	1"	6.66 lb.

**Ken-Tool**  
WHEREVER TIRES ARE CHANGED™

**TRUCK LOCK RING REMOVER**

• **APPLICATIONS:** Designed for small diameter wheels



402-32123

Ascot No.	Mfg. No.	Length	Diameter	Weight
402-32123	T23	24"	11/16"	2.4 lb.
402-33223	T23A	30"	11/16"	3.1 lb.



402-46003



402-46002

402-46001



## HEAVY DUTY HAMMERS



## FIBERGLASS HANDLE HAMMERS



Ascot No.	Mfg. No.	Handle No.	Length	Head Weight	Weight
425-35421	TG34	TG11CH	18"	5.5 lb.	6 lb.
425-35423	TG35	TG11CH	18"	4.8 lb.	6.6 lb.
425-35425	TG36	TG11CH	18"	5.8 lb.	6 lb.



## WOODEN HANDLE HAMMERS

• Used for mounting and demounting tires • APPLICATIONS: Makes tire changing easier for passenger car, truck, bus, farm tractor and aircraft tires



Ascot No.	Mfg. No.	Handle No.	Length	Weight
425-35321	T34	T11CH	17"	4.8 lb.
425-35323	T35	T11CH	16-1/2"	5.5 lb.
425-35325	T36	T11CH	16-1/2"	5.8 lb.
425-35105	T34RH			Rubberhead Replacement



## ALL-WEATHER HEAVY DUTY HAMMERS

• Handles are constructed with a solid core with thousands of fiberglass strands and a unique resin to make them super strong, all-weather, chemical and insect-resistant • Ergonomic non-slip grips for slippery conditions • MADE IN THE USA

Ascot No.	Mfg. No.	Description	Details
426-10062	10062	2 lb. Dead Blow Hammer	Engineered to perform better than rubber or plastic face hammers. Shot-loaded composite interior cavities of these Dead Blow hammers are fullyencased in a tough polymer outer jacket.
426-10064	10064	4 lb. Dead Blow Hammer	Free flowing inner shot concentrates striking power and increases driving force creating a dead blow effect.
426-10066	10066	2 lb. Dead Blow Hammer w/ Steel face	
426-27804	27804	8 lb. Slugging Hammer	Features drop forged, heat treated and tempered carbon steel sledge heads with dual machined striking faces and chamfers.
426-28045	28045	4 lb. Hand Drilling Hammer	High quality drop forged, heat treated and tempered carbon steel heads with a black crown and polished striking faces.
426-29045	29045	4 lb. Cross-Pein Hammer	High quality forged, heat treated and tempered heads with one radiused pein.
426-30025	30025	2.5 lb. Brass Hammer	High quality cast brass head with polished striking face.



## GENERAL PURPOSE HAMMERS &amp; WEDGES



## FIBERGLASS HANDLE HAMMERS



Ascot No.	Mfg. No.	Handle No.	Length	Weight
426-35411	TG11B	TG11BH	16"	4.8 lb.
426-35417	TG33R	TG31H	16"	2.5 lb.

## DUCK BILLED BEAD BREAKING WEDGES - WOOD HANDLED



Ascot No.	Mfg. No.	Handle No.	Length	Weight
424-35327	T11D	T11DH	17"	4.8 lb.
424-35329	T11E	T11EH	30"	9.2 lb.

## DUCK BILLED BEAD BREAKING WEDGES - FIBERGLASS HANDLED



Ascot No.	Mfg. No.	Handle No.	Length	Weight
424-35427	TG11D	TG11DH	18"	4.8 lb.
424-35429	TG11E	TG11EH	32"	9.1 lb.



## TIRE KNOCKER



Ascot No.	Mfg. No.	Handle Length	Weight
426-35110	35110	18"	.7 lb.

## FIBERGLASS REPLACEMENT HANDLES



Ascot No.	Mfg. No.	For Hammer No.	Length	Weight
429-35206	TG31H	TG11R, TG31, TG33R	16"	1 lb.
429-35211	TG11BH	TG11B	16"	1.3 lb.
429-35219	TG11CH	TG11C, TG34, TG35, TG36	18"	2.5 lb.
429-35218	TG11DH	TG11D	18"	1.2 lb.
429-35832	TG11EH	TG11E	32"	2.3 lb.

## HICKORY REPLACEMENT HANDLES



Ascot No.	Mfg. No.	For Hammer No.	Length	Weight
429-35111	T11EH	T11B	15"	.75 lb.
429-35113	T11HN	T11R, T31, T33R	15"	.75 lb.
429-35119	T11CH	T11C, T34, T35, T36	17"	.75 lb.
429-35127	T11DH	T11D	17"	.75 lb.
429-35129	T11EH	T11E	30"	1.2 lb.



## WRENCHES & LUG WRENCHES



### KENTOOL PORKCHOP™ WRENCHES

- Holds outer cap nut on dual wheels while turning inner nut • Lip fits in hole to secure wrench in place • Fits standard and metric cap nuts



406-30609

Ascot No.	Mfg. No.	Description	Size	Weight
406-30609	TX9	SAE	1-1/2"	.4 lb.
406-30610	TX10	Metric	35mm	.4 lb.
406-30612	TX12	Metric	41mm	.4 lb.

### COMBINATION CAP NUT WRENCHES

- Combination wrench offers you the versatility of two wrenches in one • Fit one end onto the outer cap nut with other end through center hole • Slides underneath center disc of wheel reducing slipping during nut removals



406-30620

Ascot No.	Mfg. No.	Description	Size	Weight
406-30620	TX50	SAE & Metric	41mm	1.3 lb.

### HEAVY DUTY NUT WRENCHES

- Heavy duty design will not slip out of position • Rests snugly against the center hole reducing the possibility of rim damage • Great for aluminum rims



406-30618



Ascot No.	Mfg. No.	Description	Size	Weight
406-30618	TX200	SAE	1-1/2"	2.6 lb.
406-30619	TX241	Metric	41mm	2.6 lb.



### HANDS FREE BUDD NUT WRENCHES

- Eliminates the need for hand and foot aid in separating the nuts, therefore reducing needless injury • Reduces the work and potential for back strain because there is no need to lay down the tire • Will not lose its grip on the outer cap nut so there is no loss of torque, which will give the impact wrench maximum power and efficiency



The Budd Nut Wrench in use.



406-60300

Ascot No.	Mfg. No.	Description
406-60300	60300	Budd Nut Wrench

### BUDD NUT WRENCHES

- New design won't slip out of rim hole • Will not damage aluminum/chrome rim • Holds outer cap nut securely • This adaptation of an old product solves the problem of damage to wheels, as well as broken toes and injuries to the feet • Model 60301 has a replaceable polymer covered tail that locks the tool securely in place



406-60301

406-60302

406-60303

Ascot No.	Mfg. No.	Description
406-60301	60301	Budd Nut Wrench
406-60302	60302	Budd Nut Wrench - 35mm
406-60303	60303	Budd Nut Wrench - 41mm
406-60908	60908	Replaceable Polymer Tail



www.ascotsupply.com

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



### HEAVY DUTY TRUCK FOUR-WAY LUG WRENCHES

- Drop-forged center • APPLICATIONS: Heavy duty truck, bus, tractor four-way • Center hole for leverage bar • T96 with heavy duty solid center



403-35595



403-35695



403-35696




403-35697

Ascot No.	Mfg. No.	Length	Stock	Socket Size	Weight
403-35595	TC95	27-1/2"	1"	1-1/2", 13/16" Sq., 30, 33mm	14.2 lb.
403-35695	T95	27-1/2"	1"	1-1/16", 1-1/4", 1-1/2", 13/16" Sq.	13.8 lb.
403-35696	T96	27-1/2"	1"	1-1/16", 1-1/4", 1-1/2", 13/16" Sq.	13.5 lb.
403-35697	T95A	27-1/2"	1"	1-1/4", 1-1/2", 13/16" Sq., 3/4" Service Arm (will take any standard 3/4" drive socket)	13.5 lb.
403-35795	TM95	27-1/2"	1"	24, 27, 30, 33mm	13.5 lb.

### STOW & GO™ 4-WAY HD LUG WRENCH

- The Stow & Go™ 4-Way HD Lug Wrench folds to save space in your trunk and locks into place for easy use • Push button in center allows extra leverage for removing lug nuts • Made of heavy duty and durable alloy steel • 17mm, 19mm, 21mm sockets, and 1/2" square drive adaptor to be used with other sockets • 16" in length



403-35636



The Stow &amp; Go™ 4-Way HD Lug Wrench in use.

Ascot No.	Mfg. No.	Description
403-35636	35636	Stow & Go™ 4-Way HD Lug Wrench

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com



HEAVY DUTY TRUCK WRENCHES

- Use for off-the-road Budd-type wheels • Use TR11 handle



405-34401

Ascot No.	Mfg. No.	Length	Stock	Weight
405-34401	TR10	29-1/2"	1-3/4" Hex x 15/16" Square	12.2 lb.
402-34402	TR11	30"	1-1/4"	6.5 lb.

POWER WRENCH

- Designed for dual nut systems • Has 13/16" square end to hold inner nut, with a 1-1/2" hex drive to spin outer nut off

FOR  
DUAL NUT  
SYSTEMS



406-34547



The Budd Wheel Set in use.

Ascot No.	Mfg. No.	Description
404-34543	TR43	<b>BASIC SET INCLUDES:</b> Power Drive And Two Handles (Solid Bar - 20-1/2" Long And Tube - 20" Long)
404-34545	TR44X	<b>BUDD WHEEL SET INCLUDES:</b> Power Drive, One Bar, One Tube Handle, A 3/4" Service Adapter And One 13/16" Square Adapter
404-34547	TR445W	<b>UNIVERSAL SET INCLUDES:</b> Power Drive, One 20-1/2" Bar, One 36" Tube Handle, A 3/4" Service Adapter, A 13/16" Square Adapter, And Six 3/4" Impact Sockets (7/8", 15/16", 1-1/16", 1-1/8", 1-3/16", 1-1/2")

WRENCHES & LUG WRENCHES



DOUBLE END TRUCK WRENCHES

- Double end truck wrenches for on-the-road service • Sizes available for all standard lug nuts • Constructed from 1" high quality steel for greatest strength and durability • All will take our standard TR5 (ASCOT Order No. 405-32318) leverage handle • HANDLE HEX OPENING: 3/4" • LENGTH: 16"; WEIGHT: 4-1/2 lb.

FOR ON-  
THE-ROAD  
SERVICE

402-32508

Ascot No.	Mfg. No.	Socket Size	Weight
<b>SAE</b>			
405-32501	TR1	1-1/8", 13/16" Square, 1-1/2"	4.6 lb.
405-32502	TR2	1, 1-1/4", 5/8" Square	4.3 lb.
405-32504	TR2X	15/16", 7/8"	4.5 lb.
405-32503	TR3	7/8", 1-1/16"	4.5 lb.
405-32505	TR3A	1-1/8", 1-1/16"	4.5 lb.
405-32506	TR3X	1-1/16", 1-3/16"	4.5 lb.
405-32509	TR9	1-1/4", 1-1/16"	4.5 lb.
405-32508	TR98	1-1/2", 13/16" Square	4.5 lb.
<b>METRIC</b>			
405-32551	TRM1	35mm Sq. x 17mm Square	4.5 lb.
405-32552	TRM2	24mm x 33mm	4.4 lb.
405-32553	TRM3	27mm x 30mm	4.5 lb.
405-32556	TRM6	41mm x 21mm Square	4.5 lb.
405-32557	TRM7	33mm x 30mm Square	4.5 lb.

DUAL WHEEL LUG STUD REMOVER

- Special self-tapping splines provide maximum grip to remove stripped lug studs • Use with TR1 and TR98 truck wrenches • Also used with open end wrench • Use with soft-faced hammer

SELF-  
TAPPING  
SPLINES



492-30165

Ascot No.	Mfg. No.	Description	Weight
492-30165	30165	Fits 13/16" Sq. Inner Nut	1 lb.

SHOP SERVICE TOOLS



DUAL WHEEL SEPARATOR

- Makes removing stuck or frozen dual steel wheels quick and easy • Ideal for use on nearly any truck, bus, van or trailer with dual steel wheels • Innovative "one-piece" pusher won't fall apart during use • Forcing screw and pullers have powerful 1-1/8" diameter x 7 threads for years of reliable service • Pusher is ball bearing-driven for near-zero turning resistance • Pusher is heat treated for long-lasting strength and durability • Includes two pullers to cover large truck, trailer and smaller light truck dual wheel applications • Use with air or electric impact wrench • Blow molded case

422-94549



Ascot No.	Mfg. No.	Description
422-94549	ASC94549	Dual Wheel Separator



DUAL WHEEL SEPARATOR

- Makes removing stuck or frozen dual steel wheels quick and easy • APPLICATIONS: Ideal for use on nearly any truck, bus, van or trailer that has dual steel wheels • WEIGHT: 6.5" x 9.5" x 2.5", 5.3 lb. • MADE IN USA



422-34549

Ascot No.	Mfg. No.	Description
422-34549	34549	Dual Wheel Separator



TRUCK WHEEL & RIM REMOVAL TOOL

- The easiest & quickest way to loosen stubborn, locked up rims • Retire that back-breaking 20 lb sledge that you use to break seized rims apart • Eliminate damaged tire side walls and rims • Fits all standard (22.5 and 24.5) semi truck rims; aluminum or steel • Safe and efficient



QUICK  
AND EASY

422-71650

Ascot No.	Mfg. No.	Description
422-71650	71650	RIMWIT - Truck Wheel & Rim Removal Tool - Fits Standard 22.5 & 24.5 Wheels
422-71655	71655	RIMWIT JR- Truck Wheel & Rim Removal Tool - Fits 19.5" Wheels



SHARK FIN DUAL WHEEL SEPARATION BAG

- The first wheel separation solution for steel, aluminum and chrome wheels • No metal on metal contact • 5000 lb. of static pressing force • Works on 15" to 24.5" dual and single wheels and tires on trucks & trailers • Kevlar inner inflation bag is industrial grade and nearly puncture proof • SMALL BUT MIGHTY: Portable, durable, and fast • Full inflation only takes a matter of seconds • 3-foot inflation hose makes access easy and safe • Deflation is controlled with a quick turn of the slotted valve cap • 9.75" x 8" x 3/8" height deflated, 5.5" height when fully inflated • 90 psi max pushing pressure, 150 psi maximum rated pressure



NO METAL  
ON METAL  
CONTACT

429-36455

Ascot No.	Mfg. No.	Description
429-36455	36455	Shark Fin™ Dual Wheel Separation Bag



## AUTOMATIC TIRE INFLATION SYSTEMS ➡

All systems feature an operating range of 5-145 PSI, accurate within 0.3 PSI. Units are housed in weather resistant aluminum casings. All provide an easy to use and affordable way to assure precise inflation. Units available with 110 volt AC electric or battery hook up. Optional heater available for outdoor units. Custom faceplates with corporate logo and color available. Can be hardwired and mounted to mobile service trucks. Systems confirm calibration every six minutes when in use and everytime they are powered on. **INTERNATIONAL PROTECTION RATING:** IP66, provides complete weather protection (except submersions). Automatically inflates or deflates to target PSI when attached to tire position. All systems can be programmed to specific PSI parameters to help organizations better manage consistent and accurate tire inflation. Wirelessly receives/transmits gauged and corrected pressure via Bluetooth, Zigbee, or hardwired to PC. Designed to be operated with specific Haltec air chucks. **NITROGEN COMPATIBLE:** PSI is PSI, accuracy is main goal. All systems allow technician remote control of inflation/deflation process, keeping themselves out of "blast zone" of tire.



### SINGLE TIRE INFLATOR

- Ideal for vehicle service centers, automobile dealerships and rental facilities • 1/4" inlet/outlet • **OPERATING RANGE:** 5-145 PSI



475-89001

Ascot No.	Mfg. No.	Description
475-89001	89XDA	Single Tire Inflation System

### HIGH VOLUME TIRE INFLATOR

- For Fleet Operations, Service Centers, or Mounters • **APPLICATIONS:** For 19.5" and larger rims • Capable of inflating four 22.5" tires from 5 to 100 PSI in 5 minutes



475-89003

Ascot No.	Mfg. No.	Description
475-89003	89XDB	High Volume Tire Inflation System

### OVER INFLATION & HIGH VOLUME INFLATION SYSTEM

- For Retreaders, Fleets or Mounters • Inflate single or multiple tires to a preset over-pressure setting • Unit then performs a leak test for "zipper leaks" • Deflates to final preset required PSI setting • Features 3 preset PSI settings



475-89004

Ascot No.	Mfg. No.	Description
475-89004	89 XDZ	Over Inflation & High Volume System

### SINGLE TIRE INFLATION HOSES & ACCESSORIES



475-01898

Ascot No.	Mfg. No.	Description
475-00896	SVL-STD	4" Mounting Steel Swivel Stand
475-01892	89HKK-L	Straight Hose w/Coupler & CH3600P Chuck
475-01893	89HKK-LC	Coil Hose w/ Coupler and CH-3600P Chuck
475-01894	89HKT-L	Straight Hose w/Coupler & CH 330-LO-OP Chuck
475-01895	89HKI-25	Straight Hose w/Coupler & IN-20 Tool
475-01896	89-2 WASV	2 Way Automatic Switching Valve (2 Hoses)
475-01897	89-3 WASV	3 Way Automatic Switching Valve (3 Hoses)
475-01898	89-3 WTK	3 Way Automatic Switching Valve Kit
478-00820	IN20	Core Removal and Inflation Tire Chuck

Specify Hose length when ordering. Components available separately.

[www.ascotsupply.com](http://www.ascotsupply.com)

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



### FOUR-TIRE INFLATION/EQUALIZER SYSTEM

- The Four-Tire Inflation System will inflate, deflate, and equalize up to four tires at once
- Engineered for maximum air volume and the highest possible accuracy
- Ensures repeatable and consistent tire inflation for every shop bay
- Helps prevent blowouts and tire decapitation
- Increases fuel mileage and saves tread life
- On/off toggle valves
- Accurate regulator system for drive axles
- Fast inflation times due to internally maximized hoses and ports
- Side mounted hose hangers
- Telescoping handle
- Four color-coded air hoses
- One panel-mounted, high flow regulator
- One panel-mounted, highly accurate air gauge

Ascot No.	Mfg. No.	Description
475-09062	9062	Four-Tire Inflation/Equalizer System



475-09062

UP TO 4 TIRES AT ONCE

FOUR COLOR-CODED AIR HOSES

TIRE SPECIFIC TOGGLE VALVES

### MULTIPLE TIRE INFLATION SYSTEM (3-WAY)

- Inflates up to three wheels simultaneously at a 5-145 PSI pressure
- Semi-pneumatic locking swivel wheel
- Color-coded 0.25" inflation hose
- 1/2" and 3/8" inlet/outlet
- Suitable for use with standard or large bore valves and core extraction tools
- Inlet pressure gauge
- Dual LCD screens indicate gauged and targeted pressure

Ascot No.	Mfg. No.	Description
475-89103	89MTIS-3DS	Haltec Multiple Tire Inflation System (3-Way)



475-89103

INFLATES UP TO THREE WHEELS

DUAL LCD SCREENS

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

[www.ascotsupply.com](http://www.ascotsupply.com)



AUTOMATIC TIRE INFLATION SYSTEMS



MULTIPLE TIRE INFLATION HOSES & ACCESSORIES

Ascot No.	Mfg. No.	Description
478-00360	CH-360S	Chip-On Style Air Chuck (Closed) w/Spring
475-00891	89HKT-LM	Straight Hose w/ CH-360S Air Chuck
475-00892	89HKT-LM	Straight Hose w/Coupler & CH-330-LO Air Chuck
475-00893	89HKT-25	Straight Hose w/Coupler & IN-20 Tool (Single Tire)
475-00894	89-HMVN	4-Way Manifold
475-00895	89-3W	Air Flow Control Valve
475-00896	SVL-STD	4" Mounting Steel Swivel Stand
478-03300	CH-330-LO	Lock-On Style Air Chuck (Dual Wheels)

4-WAY INFLATOR ACCESSORY BLOCK

- Lightweight aluminum manifold splits air lines into (4) separate lines
- Slide valve turns air on/off to start inflation
- (4) 1/4" universal quick couplers allow for any type fitting
- 3' whip hose



Ascot No.	Description
477-11624	4-Way Inflator Accessory Block



4-WAY INFLATOR KIT

- Quick coupler connects directly to the inflator
- Slide valve allows air supply to be turned on & off • Includes all hoses and connection



Ascot No.	Mfg. No.	Description
477-11623	11.0623NA	4-Way Inflator Kit - 25ft
477-11625	11.0625NA	4-Way Inflator Kit - 10ft



MISC TIRE SERVICING TOOLS



2" QUICK CHANGE SURFACE CONDITIONING DISCS

- Available in fine, medium or coarse
- Embedded with abrasive grain to eliminate fraying of edges, resist loading and provide a consistent finish
- Ideal for flat or contoured surfaces
- Made in USA

Ascot No.	Mfg. No.	Description
417-39120	3912BLUEF	2" Quick Change Surface Conditioning Discs: Blue (Fine)
417-39121	3912MARNM	2" Quick Change Surface Conditioning Discs: Maroon (Medium)
417-39122	3912BRWNC	2" Quick Change Surface Conditioning Discs: Brown (Coarse)
417-13003	620TE-1	2" Surface Conditioning Discs: Brown (Coarse)
417-13004	622TE-1	2" Surface Conditioning Discs: Maroon (Medium)
417-13005	620TE-1-50	2" Surface Conditioning Discs: Brown (Coarse)

3" QUICK CHANGE SURFACE CONDITIONING DISCS

- Features the quick and easy "R" type backing
- Ideal for general grinding, rust removal, clean-up and paint removal
- Use with right angle or die grinders
- Ideal for flat contoured surfaces
- Made in USA

Ascot No.	Mfg. No.	Description
417-13006	630TE	3" Quick Change Surface Conditioning Discs
417-13007	632TE	3" Quick Change Surface Conditioning Discs

3" STRIP-BRITE PADS

- Feature the quick and easy twist-to-lock attachment system
- Provide aggressive and long lasting performance
- Durable, three-dimensional web with a soft edge in unreachable creases and dents without damaging metal
- Made in USA



Ascot No.	Mfg. No.	Description	Qty
417-16210	16210	2" Strip-Brite Pad - Purple (Coarse)	10/box
417-16211	16211	3" Strip-Brite Pad - Purple (Coarse)	10/box



## MISC TIRE SERVICING TOOLS



### GREEN ZIRCONIA DISCS

- Twist-to-lock backing
- Offers longer life and more aggressive results than zirconia or aluminum oxide
- Flexible discs resist chipping, snagging and cracking
- 20,000 RPM
- For use on air grinders and are compatible with all 3M style, Type "R" backing pads
- Especially good on extra hard metals
- 25 per box
- **Made in USA**

Ascot No.	Mfg. No.	Description	Qty
417-12612	12612	2" Green Zirconia Grinding Disc - 24 Grit	25/box
417-12613	12613	2" Green Zirconia Grinding Disc - 36 Grit	25/box
417-12614	12614	2" Green Zirconia Grinding Disc - 50 Grit	25/box
417-12615	12615	2" Green Zirconia Grinding Disc - 80 Grit	25/box
417-12616	12616	3" Green Zirconia Grinding Disc - 24 Grit	25/box
417-12617	12617	3" Green Zirconia Grinding Disc - 36 Grit	25/box
417-12618	12618	3" Green Zirconia Grinding Disc - 50 Grit	25/box
417-12619	12619	3" Green Zirconia Grinding Disc - 80 Grit	25/box



### BACKING PADS FOR SURFACE CONDITIONING DISCS

- Compatible with all twist-to-lock brands of discs
- Rigid rubber pad
- Twist-to-lock attachment
- Use with surface prep, mini grinding, strip-it and mini flap discs

Ascot No.	Mfg. No.	Description
417-39202	13012	Backing Pad for 2" Surface Conditioning Discs
417-39203	13013	Backing Pad for 3" Surface Conditioning Discs

### CUT-OFF WHEELS

- Reinforced with fiberglass
- Fast cutting abrasive can be used in a variety of applications, including steel cutting
- The fiberglass reinforcement provides greater tensile strength, as well as safety
- **Made in USA**

Ascot No.	Mfg. No.	Description
417-12704	12704	3" Cut Off Wheels (10 Pack)

### MINI ANGLE DIE GRINDER KIT

- **KIT INCLUDES:** (1) 2" backing pad, (2) 2" coarse surface prep pads, (2) 2" medium surface prep pads, (2) 2" fine surface prep pads, (2) 2" 50 grit sanding discs, (2) 2" 36 grit sanding discs, (2) 2" 24 grit sanding discs paced in a heavy duty carrying case
- **MAX RPM:** 22,500

Ascot No.	Mfg. No.	Description
157-01875	CP875K	Mini Angle Die Grinder Kit



157-01875  
Mini Angle Die  
Grinder Kit

www.ascotsupply.com

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## SAFETY INFLATION CAGES



**Ken-Tool**  
WORKSHEET TIRE AIR CHAMBER

### KEN-TOOL® SAFETY INFLATION CAGES

- Constructed of heavy gauge steel welded to a steel base
- Guards against blown lock rings, exploding rims and ruptured tire explosions when used properly • These cages meet OSHA safety requirements (29-CFR Part 1910.177)



Ascot No.	Mfg. No.	Description	Handles Tires	Base Plate	Inside Height	Inside Dimensions	Weight
<b>2-BAR SAFETY INFLATION CAGES</b>							
479-46001	36001	2-Bar Safety Cage	—	7" x 21-1/2"	41"	41" H x 16" W	60 lb.
479-46011	36007	2-Bar Wide Base Safety Cage	—	7" x 27"	43.5"	43.5" H x 20.5" W	72 lb.
<b>3-BAR SAFETY INFLATION CAGES</b>							
479-36003	T103	3-Bar Safety Cage/Light Truck Cage	—	21-1/2" x 22"	30"	30" H x 16" W	80 lb.
479-36004	T104	3-Bar Safety Cage for Off Road	—	30" x 27"	65"	65" H x 24" W	158 lb.
479-46006	36006	3-Bar Tire Inflation Cage	—	31.5" x 26"	43.5"	43.5" H x 20.5" W	146 lb.
<b>4-BAR SAFETY INFLATION CAGES</b>							
479-46002	36002	4-Bar Safety Cage	—	31.5" x 26"	43.5"	43.5" H x 20.5" W	146 lb.
<b>5-BAR SAFETY INFLATION CAGES</b>							
479-46005	36005	5-Bar Safety Cage	—	41" x 26"	43.5"	43.5" H x 20.5" W	182 lb.
479-46010	36010	5-Bar Super Magnum	—	48" x 30"	41.5"	41.5" H x 24" W	248 lb.



**Work safely. Always use an inflation cage when inflating tires. Follow OSHA regulation 29-CFR Part 1910.177 whenever changing tires.**

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com

**Branick**

**SAFETY INFLATION CAGES**



**BRANICK SAFETY INFLATION CAGES**

• Constructed of heavy gauge steel welded to a steel base • No-mar wheel protection available • Multiple sizes for passenger and commercial locations • Side mesh option provides complete protection • Arch design for maximum energy displacement • These cages meet OSHA safety requirements (29-CFR Part 1910.177)



HEAVY  
GAUGE  
STEEL

MULTIPLE  
SIZES AND  
DESIGNS

Ascot No.	Mfg. No.	Description	Max. Height x Max. Tire Width	Dimensions	Weight
<b>2-BAR SAFETY INFLATION CAGES</b>					
479-02220	2220	Portable 2-Bar Safety Cage	54" x 21.5"	28" W x 17" D x 60" H	76 lb.
<b>3-BAR SAFETY INFLATION CAGES</b>					
479-02130	2130	3-Bar Passenger/Light Truck Cage	34" x 21.5"	28" W x 20" D x 40" H	120 lb.
<b>4-BAR SAFETY INFLATION CAGES</b>					
479-02240	2240	4-Bar Safety Cage with No Mar Coating	54" x 21.5"	28" W x 28" D x 60" H	170 lb.
<b>6-BAR SAFETY INFLATION CAGES</b>					
479-02260	2260	6-Bar Safety Cage	59" x 29"	35" W x 41" D x 62" H	385 lb.



Work safely. Always use an inflation cage when inflating tires.  
Follow OSHA regulation 29-CFR Part 1910.177 whenever changing tires.

ASCOT  
Supply Corporation

**ASCOT SUPPLY SAFETY  
INFLATION CAGES**

• A safety inflation cage is mandatory in any shop for tubeless and multi-piece rims and Ascot offers a size and design for all your needs • Constructed of heavy gauge steel welded to a steel base • Guards against blown lock rings, exploding rims and ruptured tire explosions when used properly • These cages meet OSHA safety requirements (29-CFR Part 1910.177)

HEAVY  
GAUGE  
STEEL

VARIOUS  
SIZES AND  
DESIGNS



Ascot No.	Mfg. No.	Description	Handles Tires	Dimensions	Weight
<b>2-BAR SAFETY INFLATION CAGES</b>					
479-36001	MIC-2	Portable 2-Bar Safety Cage	Up to 48" OD X 13" W	21-1/2" x 16-3/4" x 51"	69 lb.
479-36011	MIC-2WB	Portable 2-Bar Safety Cage (Super Single)	Up to 48" OD X 21" W	29" x 16-3/4" x 52"	78 lb.
479-36201	MIC-2G	Galvanized Portable 2-Bar Safety Cage	Up to 48" OD X 13" W	21-1/2" x 16-3/4" x 51"	69 lb.
479-36211	MIC-2WBG	Galvanized Portable 2-Bar Safety Cage (Super Single)	Up to 48" OD X 21" W	29" x 16-3/4" x 52"	78 lb.
<b>3-BAR SAFETY INFLATION CAGES</b>					
479-36006	MIC-3	3-Bar Safety Cage	Up to 47" OD X 19" W	22-1/4" x 26-1/4" x 57-5/16"	108 lb.
479-36013	MIC-PCR	3-Bar Passenger-SUV Safety Cage	Up to 35" OD X 12.5" W	21" x 28" x 40"	93 lb.
<b>4-BAR SAFETY INFLATION CAGES</b>					
479-36002	MIC-4	4-Bar Safety Cage	Up to 47" OD X 19" W	31-5/8" x 26-1/4" x 57-5/16"	147 lb.
<b>5-BAR SAFETY INFLATION CAGES</b>					
479-36005	MIC-5	5-Bar Safety Cage	Up to 47" OD X 19" W	41" x 26-1/4" x 57-5/16"	182 lb.
479-36015	MIC-OTR	OTR 5-Bar Safety Cage	Up to 62" OD X 33" W	41" x 39-3/8" x 66"	277 lb.



Work safely. Always use an inflation cage when inflating tires.  
Follow OSHA regulation 29-CFR Part 1910.177 whenever changing tires.





## SAFETY INFLATION CAGES



### TRUCK TIRE CHANGING STAND

• **APPLICATIONS:** Handles wheels or open rims 16.5" to 24" • Double-slide adjustment with locking device prevents twisting so it stays aligned with the wheel or rim • Ideal height for driving off beads or demounting tire



479-36115

Ascot No.	Mfg. No.	Description
479-36115	T115	Truck Tire Changing Stand

### ROLLER FOR TIRE INFLATION CAGES

• Used to roll the tires easily directly into the inflation cage • Allows an easy access to the tire valve because it is easy to turn the tire to have the valve to any position • For use with all 3-bar, 4-bar & 5-bar inflation cages • Prevent back injuries when handling heavy tires • **WEIGHT:** 12 lbs.



479-36111

Ascot No.	Mfg. No.	Description
479-36111	MIC-ROLLER	Roller for Tire Inflation Cages

### EZ TIRE ROTATOR FOR INFLATION CAGES

• **APPLICATIONS:** EZ Tire Rotator fits any Ken-Tool 3-Bar, 4-Bar and 5-Bar Inflation Cage, plus many competitive cages • No need to lift or remove rim/wheel assembly from cage when repositioning valve stem for access through the cage tubes • Allows tire tech to easily and quickly rotate rim/wheel assembly inside the safety cage in order to adjust position of valve stem • Reduces handling, back strain and user fatigue; increases safety • Easily installed or moved to another cage - no fastening required • No assembly required; simply place in the center of the cage • Features heavy-duty 2" ball-bearing steel rollers and 1/4" thick steel stock for long service • Boxed and UPS shippable • **MADE IN USA**



479-36014

Ascot No.	Mfg. No.	Description
479-36014	T114	EZ Tire Rotator for Inflation Cages

## TPMS TOOLS



### DILL TRAILER TPMS SYSTEMS

• Dill's aftermarket Trailer TPMS is available in 2-wheel and up to 10-wheel combinations • 4 optional valve stems that attach to the sensors are available for different wheel styles • Protect the goods you tow, increase fuel economy and extend tire life



The display on the Dill Trailer TPMS System.

Ascot No.	Mfg. No.	Description
469-02453	1502-453	Trailer TPMS Kit, Two (2) Wheels, 0.453" Rim Hole Diam.
469-04416	1504-416	Trailer TPMS Kit, Four (4) Wheels, 0.453" Rim Hole Diam.
469-04572	1504-572	Trailer TPMS Kit, Four (4) Wheels, 0.625" Rim Hole Diam.
469-06453	1506-453	Trailer TPMS Kit, Six (6) Wheels, 0.453" Rim Hole Diam.
469-06572	1506-572	Trailer TPMS Kit, Six (6) Wheels, 0.625" Rim Hole Diam.
469-08453	1508-453	Trailer TPMS Kit, Eight (8) Wheels, 0.453" Rim Hole Diam.
469-08572	1508-572	Trailer TPMS Kit, Eight (8) Wheels, 0.625" Rim Hole Diam.
469-10453	1510-453	Trailer TPMS Kit, Ten (10) Wheels, 0.453" Rim Hole Diam.
469-10572	1510-572	Trailer TPMS Kit, Ten (10) Wheels, 0.625" Rim Hole Diam.

- UP TO 10 WHEEL COMBOS
- INCREASE FUEL ECONOMY
- EXTEND TIRE LIFE



469-04416

## TUBELESS TIRE VALVES (TRUCK)



## TRUCK &amp; BUS TUBELESS TIRE VALVES: 570 SERIES


- Used on both demountable and non-demountable rims with standard 5/8" (.625") side hole valve mountings
- Heavy duty rubber grommet forms airtight seal when valve is clamped in rim by tightening the hex nut • Eight valves cover all truck rim requirements • Available in custom bends • Dill or Haltec equivalent available

Ascot No.	TR No.	Effective Length
463-00575	575	1-1/8"
463-00501	501	1-1/2"
463-00500	500	2"
463-00570	570	3-1/8"
463-00571	571	3-3/8"
463-00572	572	3-3/4"
463-00573	573	4-3/8"
463-00574	574	5"



## ALUMINUM WHEEL TRUCK TUBELESS TIRE VALVES: 540 &amp; 550 SERIES

- Designed for use with 9.7mm (.382") rim hole • Rubber O-ring forms a seal when valve is clamped to rim by tightening hex nut • Designed specifically for use in aluminum wheels • Dill or equivalent available • 550 Series equipped with rubber grommet



Ascot No.	TR No.	A	B	C
<b>540 SERIES</b>				
463-00542	542	1.25"	—	—
463-00543	543	2.31"	—	—
463-00544	544	2.86"	—	—
463-00545	545	3.50"	—	—
463-00546	546	4.25"	—	—
463-01544	544C	0.86"	1.94"	45°
463-05433	543C	0.93"	1.43"	45°
463-05434	543D	0.98"	1.38"	60°
463-05435	543E	0.98"	1.38"	75°
463-05444	544D	0.98"	1.94"	60°
463-05454	545D	0.98"	2.60"	60°
463-05464	546D	0.98"	3.35"	60°
463-05465	546E	0.98"	3.35"	75°
463-05474	547D	0.98"	3.78"	60°
463-15454	545E	0.98"	2.60"	75°
463-54636	546-36	0.98"	3.35"	36°
468-10060	RG-60	Repl. O-Ring TR-540 Series		



## REPLACEMENT VALVE COMPONENTS


- Packaged 100 per Box

Ascot No.	Dill No.	Description
468-00103	100-TB	Dill Replacement Core
468-00462	462G	Dill Green High Temp Grommet
468-00765	765	Dill Replacement Dome Cap
468-01462	462-F	Dill Red High Temp Grommet (-50F to 400F)
468-02462	462	Dill Black Rubber Grommet
468-05952	595-2	Replacement Washer
468-05953	595-3	Replacement Grommet
468-05954	595-4	Replacement Hex Nut

## TUBELESS VALVES FOR ALUMINUM DISC WHEELS

- For drop-center aluminum disc wheels with 5/8" bottom valve hole

Ascot No.	TR No.	Effective Length
463-00509	509	4-3/4"
463-00510	510	5-1/2"
463-00511	511	4-1/4"
468-05093	509-3	Replacement Rubber Grommet



## NITROGEN O-RING &amp; SLEEVES

- Fits 540 and 570 Truck Valves
- Nitrogen use in truck tires

Ascot No.	TR No.	Description
468-00307	TS-OR	O-Ring
468-00607	NITSLV	Indicator Sleeves



## TRUCK &amp; SPECIALTY VALVES



## RADIAL COMMANDER VALVE FOR 15" DISC WHEELS

- 23° bend clamp-down valve for .625" valve hole • Bend allows clearance of brake drum for tire service • Cap and core not included

Ascot No.	Mfg No.	Description
462-01147	VS-1223R	Radial Commander Valve. Made in the USA.
462-01224	VS-1224	Longer Radial Commander Valve for Equal Applications



## VALVE FOR 16 X 6KS WITH OVAL HOLE

- Oval rim slot valve for 16 x 6KS and 16 x 6-1/2LS rim contours • Allows a positive seal in this special valve hole • Check the valve hole for metal burrs prior to installation


Ascot No.	Mfg No.	Description
462-05010	HS010V	Oval Rim Slot Valve



## TRUCK/BUS SCREW-ON REPAIR VALVES

- Replace damaged cured-in or cured-on valves without cutting out old valve base • 1-1/16" horizontal diameter

Ascot No.	Mfg No.	Effective Length
463-01177	1177A	3-3/4"
463-01175	1175A	4-1/2"
463-01078	1078A	5"



## TRACTOR FRONT WHEEL VALVES

- Low profile valve offers minimum protrusion above the rim • 9/16" effective length with chrome finish • Fits .453" or .625" valve holes

Ascot No.	Mfg No.	Description
462-06008	TV-6008C	Tractor Front Wheel Valve With Chrome Finish
462-16008	TV-6008	Tractor Front Wheel Valve With Brass Finish



## TUBELESS MOTORCYCLE VALVE

- Has O-ring seal • Fits .327" valve holes
- **EFFECTIVE LENGTH:** 1-13/16"

Ascot No.	Mfg No.	Description
462-00430	TR-430	Tubeless Motorcycle Valve



## ALLOY VALVE

- Light alloy valve used on racing and light alloy wheels • Fits .453" valve hole • Has O-ring seal

Ascot No.	Mfg No.	Description
462-00523	H-523MS	Alloy Valve



## SPECIAL CLAMP-IN TIRE VALVE

- Designed for front wheel drive Toronado ('66-'78) and Eldorado ('67-'78) cars

Ascot No.	Mfg No.	Description
462-00417	417	Special Clamp-In Tire Valve



## FORD "F" SERIES TRUCK VALVE



- Ford F-Series Trucks with inner dual wheels • Sealing metal cap • 0.453" valve hole • Torque 25-45 inch/lbs.

Ascot No.	Mfg No.	Description
462-00962	VS-962C	Ford "F" Series Truck Valve



## FORD "F" SERIES TRUCK VALVE



- Ford "F" series with dual wheels • Accuride steel 16" x 16" • Front and rear wheels • Nickel finish • Includes dual seal cap

Ascot No.	Mfg No.	Description
462-02416	TV-416MC	Ford "F" Series Valve







### FORD "F" SERIES TRUCK VALVE

- Ford "F" series with dual wheels • Alcoa aluminum 16"
- Front and rear wheels • Chrome finish • Includes dual seal cap

Ascot No.	Mfg No.	Description
462-01600	N-1600	Ford "F" Series Truck Valve



462-01600

### FORD "F" SERIES VALVE

- Ford "F" series with dual wheels • Accuride steel 19.5"
- Front and rear wheels • Nickel finish • Includes dual seal cap

Ascot No.	Mfg No.	Description
462-03416	TV-416/DS-1	Ford "F" Series Valve



462-03416

### FORD "CUT-AWAY" SERIES VALVE

- Ford "cut-away" series with dual wheels • Accuride steel 16" x 16"
- Front and rear wheels • Nickel finish • Includes dual seal cap

Ascot No.	Mfg No.	Description
462-01416	TV-416LF	Ford "F" Series Valve



462-01416

### FORD "CUT-AWAY" AND CARGO VAN SERIES VALVE

- Ford "cut-away" and Cargo van series with single rear wheels
- Accuride steel 16" x 7" wheels • Front and rear wheels • Chrome Finish

Ascot No.	Mfg No.	Description
462-01575	TV-575HP/DS-1	Ford "Cut-Away" & Cargo Van Series



462-01575

## TRUCK & SPECIALTY VALVES



### O-RING SEAL SILICONE TRUCK VALVES

- Handles any type of high temp application • Operating temperature from -67°F to 500°F • Seals between the rim and valve more effectively • **REPLACEMENT O-RINGS AVAILABLE: RG-ISO (468-50015)**



463-01572

469-02572

Ascot No.	Mfg. No.	Description
463-01571	VS-571-EQ	O-Ring Silicone Truck Valve for TR571
463-01572	VS-572-EQ	O-Ring Silicone Truck Valve for TR572
463-01573	VS-573-EQ	O-Ring Silicone Truck Valve for TR573
469-02570	VS-570EQ	O-Ring Silicone Truck Valve for TR570
469-02572	VS-572EQ-13	O-Ring Silicone Truck Valve for TR572 - 13° Bend
469-02573	VS-573EQ-13	O-Ring Silicone Truck Valve for TR573 - 13° Bend

### STANDARD O-RINGS FOR TUBELESS RIMS

- Made of high quality polysoprene rubber • Packaged 2 per poly bag, 24 O-rings per case • Manufactured to major OEM specifications • **Made in USA**



Ascot No.	Mfg. No.	Rod Diam.	Size
471-80008	OR-25-T	0.26"	EM 25"
471-80007	OR-224-TG	0.26"	Grader 24"
471-80012	OR-33-T	0.385"	EM 33"
471-80010	OR-325-T	0.385"	EM 25"



### NUT SPLITTER

- Removes brass tire valves from truck rims
- Available in manual and pneumatic



469-00580

469-00590

Ascot No.	Mfg. No.	Description
469-00580	NS58B	Manual Nut Splitter
469-00590	NS59B	Pneumatic Nut Splitter. Attaches To Pneumatic Hammer

### VALVE BLASTER TRUCK VALVE STEM REMOVAL TOOL

- Removes valves quickly • Slide hammer with an internal spring absorbs the shock of impact • Easy to use • Designed to shear the bottom flange off the valve with one or two blows • OAL - 63"



469-22011

Ascot No.	Mfg. No.	Description
469-22011	VB	Valve Blaster Truck Valve Stem Removal Tool
469-22012	RE	Replaceable End for Valve Blaster Truck Stem Removal Tool



### VALVE BREAKER

- Removes valves quickly • Slide hammer with an internal spring absorbs the shock of impact • Easy to use • Designed to shear the bottom flange off the valve with one or two blows



469-32011

469-32012

Ascot No.	Mfg No.	Description
469-35934	35934	27" Valve Breaker
469-32011	35936	45" Valve Breaker
469-32012	35935	Valve Breaker Parts Kit



### VALVE STEM WRENCH KIT

- Kit includes 9/16" & 5/8" valve stem wrenches in durable pouch



469-01820

Ascot No.	Mfg. No.	Description
469-01820	VSW-1820-KIT	Valve Stem Wrench Kit
469-00018	VSW18	Valve Stem Wrench
469-00020	VSW20	Valve Stem Wrench

## TRUCK & SPECIALTY VALVES



### SLIMLINE VALVE NUT TORQUE WRENCH

- **OPERATING RANGE:** 40-180 in./lbs. (4-20 Nm)
- **ACCURACY:** +/- 4%
- The SLO Torque Wrench is the smallest wrench in our 'Slimline' range
- Perfect for TPMS applications
- Traceable calibration certificate supplied to satisfy ISO 9000 quality systems
- High quality 72-tooth ratchet allows use in confined spaces
- Production 'P' Type versions designed to discourage unauthorized alteration
- Wide variety of end fittings available, to suit most applications
- Unmistakable signal when set torque is reached
- Ends sold separately and not included with 11126 Torque Wrench



The 16mm Spigot Adjustment on Norbar's Slimline Valve Nut Torque Wrench.



168-11126



The ends shown are sold separately and are not included with the 11126 Torque Wrench

HIGH QUALITY 72-TOOTH RATCHET

USE IN CONFINED SPACES

Ascot No.	MFG. No.	Description
168-11126	11126	Slimline Valve Nut Torque Wrench
AVAILABLE ENDS FOR SLIMLINE VALVE NUT TORQUE WRENCH		
168-29706	29706	9/16" Open End
168-29731	29731	9/16" Ring End
168-29756	29756	9/16" Flare End
168-29707	29707	5/8" Open End
168-29732	29732	5/8" Ring End
168-29757	29757	5/8" Flare End



### VALVE NUT TORQUE WRENCHES

- Wrench flexes when proper torque setting is reached • Prevents overtightening of the valve grommet • Cushioned handle
- Sizes and preset torque settings laser etched on shaft • 9/16" for TR570 series valve hex nuts • 5/8" for TR540-550 series valve hex nuts • +/- 4% accuracy



168-00916

168-00058

Ascot No.	Mfg. No.	Description
168-00916	NSPTW916	9/16" Preset Valve Torque Wrench ~ 42 in./lb.
168-00058	NSPTW58	5/8" Preset Valve Torque Wrench ~ 100 in./lb.

### DILL TRUCK VALVE TOOL KIT

- Tool Kit for alloy and steel truck wheels
- Allows you to accurately inspect, gauge and install truck valves with pre-set torque tools
- Follows industry guidelines and valve hole measurements
- Included industry-recognized truck valve stem installation procedures poster is 34" x 22" in size and is printed on heavy poster paper with gloss

#### PARTS INCLUDED:

540G & 570G Go/No-Go Gauges  
T-540 & T-570 Preset Torque Wrenches

572G-6 T-Handle Hex Tool to hold base of stems  
Industry-Recognized Truck Valve Stem Installation Procedures Poster



INDUSTRY-RECOGNIZED TRUCK VALVE STEM INSTALLATION PROCEDURES



469-05700

FOR ALLOY & STEEL TRUCK WHEELS

PRE-SET TORQUE TOOLS



469-05720

Ascot No.	Mfg. No.	Description
469-05700	5700	Dill Truck Valve Tool Kit w/ 2 Open-End Torque Tools
469-05720	5720	Dill Truck Valve Tool Kit w/ 1 Open-End and 1 Straight Torque Tool
469-15720	5720-Poster	Wall Poster of Accurate Truck Valve Installation and Inspection Processes





## VALVE CAPS, CORES & EXTENSIONS



### TRUCK VALVE CAPS



468-00102



468-00632



468-00765

Ascot No.	Mfg. No.	Description	TR No.	Sealing Washer Material	Operating Pressure	Operating Temp Range (F)	Pack Size	Finish
468-00765	765	Dill Dome Cap	VC3	Nitrile	0-200 PSI	-40° To +165°F	100	Nickel Plated
468-00632	632	Dill High Temp Dome Cap	VC3	Plastic	100 PSI	-40° To +250°F	100	Nickel Plated
468-00102	630QV	All Purpose Cap With Screwdriver Top For Removing/Inserting Valve Cores	VC2	Nitrile	0-200 PSI	-40° To +165°F	100	Nickel Plated

### DOUBLE SEALING VALVE CAPS

- Light weight design uses both high temperature and low temperature resistant airtight seals at extension tip and valve mouth
- External grooves accommodate all industry standard air chucks and gauges • Knurled surface for easy hand installation
- Nickel plated for better appearance and improved corrosion protection
- Brass or plated, grooved or knurled • Increases productivity • **MADE & TESTED IN THE USA**



468-26541



468-16541



Ascot No.	Mfg. No.	Description	Qty./Box
468-06541	654IN	Double Seal Valve Cap	50
468-16541	654IN	Double Seal Valve Cap	250
468-26541	654IN2	Double Seal Cap for Nitrogen	250



### DUAL WHEEL EXTENSIONS

- For convenient air service access to inner rear dual wheels • Fit standard valve cap threads and include a clip to secure the extension to the wheel cutout • Can be used on campers, recreational vehicles and light trucks



468-10012

Ascot No.	Mfg. No.	Eff. Length
468-10017	9059-7	7"
468-10019	9059-9	9"
468-10011	9059-11	11"
468-10012	9059-12	12"



468-04191



468-02222

### DOUBLE SEAL CAP

- A time, money and labor saving alternative to common valve caps • Reduce pressure check time by 65% • Designed for high pressure truck tire service • Inflate, deflate or gauge directly thru the DS-1 saving time during inflation and pressure checks • Automatic inflation systems lock right onto the DS-1 • Seals like a high pressure cap, yet offers the convenience of an inflate thru extension • Performs like a check valve, the seal becomes tighter in the event of a core failure • Heat resistant grommets provide additional protection for extended high temperature running • Features tough all metal housing, precision fit brass components and durable self-sealing O-Ring

Ascot No.	Mfg. No.	Description
468-04191	DS-1	Double Seal Cap



### ALLIGATOR V2B DUAL SEAL CAP

- Made in Germany by Alligator • Increased tire life
- Lower fuel consumption • Safety for driver and vehicle

Ascot No.	Mfg. No.	Description	Qty./Box
468-02222	V2B-50	Alligator V2B Dual Seal Cap	50
468-12222	V2B-250	Alligator V2B Dual Seal Cap	250

### DILL TRUCK VALVE EXTENSIONS

- Extensions screw onto the standard .305" valve cap threads of the valve stem and make valve mouth accessible for air service • Available in various lengths

Ascot No.	Mfg. No.	Eff. Length
<b>STRAIGHT METAL EXTENSIONS</b>		
468-00330	330	4-1/8"
468-00331	331	3-1/8"
468-00341	341	4-7/16"
468-00346	346	1"
468-00347	347	3-1/16"
468-00348	348	5-1/16"
468-00349	349	6-1/16"
468-00350	350	2-7/32"
468-00356	356	1-13/32"

Ascot No.	Mfg. No.	Bend Angle	Eff. Length
<b>BENT METAL EXTENSIONS</b>			
468-08028	8028	45°	1-3/8"



468-00347

### DUAL WHEEL FLEXIBLE VALVE EXTENSIONS

- Provide easy access to the inner dual tire found on campers, recreational vehicles and light trucks • Fit standard valve cap threads • Come with clamp to secure extension to wheel cutout • 2 extensions per pack and available in steel braided hose



468-30007

468-40007

### DILL LIGHTWEIGHT TRUCK VALVE EXTENSIONS

- Made from nickel plated brass • Provide the additional length necessary to inflate, deflate or gauge tires with valves hidden by decorative wheel covers • Lightweight

Ascot No.	Mfg. No.	Collar Type	Eff. Length
468-01032	1032	Short 3/8"	2"
468-01033	1033	Short 3/8"	2.93"
468-01034	1034	Short 3/8"	3.93"
468-01035	1035	Short 3/8"	5.12"
468-01037	1037	Long 1"	2.93"
468-01038	1038	Long 1"	5.12"
468-01039	1039	Long 1"	6"



468-01038



468-01039

### HALTEC ALUMINUM EXTENSIONS

- Extremely lightweight
- Made from aluminum



Ascot No.	Mfg. No.	Collar Type	Eff. Length
468-01390	HE-390A	Long	2"
468-01391	HE-391A	Long	2-15/16"
468-01392	HE-392A	Long	5-1/8"
468-01393	HE-393A	Long	6"



468-01390

### VALVE ACCESSORIES

Ascot No.	TR No.	Fits Thread	For Uses On
<b>HEX NUTS</b>			
468-10013	HN-13	.406"-28	TR570 Series
468-10004	HN-4	.406"-28	TR416
468-10117	HN-17	.406"-28	TR509, 510
468-00808	RW-8	.406"-28	TV500 & TV570 Series
<b>GROMMETS</b>			
468-10015	RG-15	.625"	TR570 Series
468-11700	G-1700S	.625"	Heat Resistant for TV570
468-10046	RG-46	.625"	TR509, 510
468-10039	RG-39	.625"	TR416
468-10054	RG-54	.453"	TR416
<b>O-RING</b>			
468-10060	RG-60	.328"	TR540 Series



468-10015



468-10046



468-10060

# SPECIAL APPLICATION PRODUCTS



## HALTEC TRUCK VALVE EXTENSIONS

• **HE-370 SERIES:** Lightweight Extensions have the short collar for use on tube-type valves or tubeless lightweight valves. Has a double seal feature to assure positive seal • **HE-390 SERIES:** Lightweight Extensions are the same as the HE-370 series except with a long collar • **HE-380 SERIES:** Standard Style Extensions screw on the standard valve stem (.305"-32" cap thread) and make valve mouth accessible • *Extensions & stabilizers available for Alcoa wheels*

Ascot No.	Mfg. No.	Collar Type	Eff. Length
468-00370	HE-370	Short 3/8"	2"
468-00371	HE-371	Short 3/8"	2-15/16"
468-00372	HE-372	Short 3/8"	3-15/16"
468-00373	HE-373	Short 3/8"	5-1/8"
468-00389	HE-389	Long 1"	1-1/16"
468-00390	HE-390	Long 1"	2"
468-00391	HE-391	Long 1"	2-15/16"
468-00392	HE-392	Long 1"	5-1/8"
468-00393	HE-393	Long 1"	6"
468-00394	HE-394	Long 1"	8"
468-00395	HE-395	Long 1"	10"
468-00396	HE-396	Long 1"	12"
468-00397	HE-397	Long 1"	14"
<b>STANDARD STYLE</b>			
468-00381	HE-381	Long 1"	3-1/16"
468-00382	HE-382	Long 1"	5-1/16"
468-00383	HE-383	Long 1"	6-1/16"

468-00370



468-00390



468-00382



## BLACK POLYMER VALVE EXTENSIONS

• Light-weight truck extensions are made of a durable, tough plastic able to withstand the conditions tire valve extensions are exposed to • They are designed for use where vibration and weight is a concern for valve stem breakage

Ascot No.	Mfg. No.	Cap	Eff. Length
468-13500	HE-350	VC-3	2.04"
468-13501	HE-350D	DS-1	2.63"
468-13510	HE-351	VC-3	3.82"
468-13511	HE-351D	DS-1	4.41"
468-13520	HE-352	VC-3	5.21"
468-13521	HE-352D	DS-1	5.80"
468-13530	HE-353	VC-3	5.94"
468-13531	HE-353D	DS-1	6.53"

468-13530



## CROSSFIRE DUAL™ TIRE PRESSURE EQUALIZATION SYSTEM

**HOW CROSSFIRE WORKS:** Crossfire is a pressure equalizing and monitoring valve that is mounted between dual tires. It bolts easily to the lug, hub cap, or drive axle end. Properly mounted, air freely flows from one tire to the other, maintaining equal tire pressure and load distribution.

• **Maximizes tire life** • Decreases rolling resistance for increased fuel mileage • Cuts maintenance time due to single-point inflation and the visual pressure gauge • Improves stability, braking and overall safety • Installs in minutes and requires little maintenance • Pays for itself in less than a year • **American-made and guaranteed for two years**



**Under-inflation**  
20% under-inflation can cause a minimum 30% loss of tire life expectancy



**Over-inflation**  
20% over-inflation can cause a minimum 10% loss of tire life expectancy



**Proper-inflation**  
Mounted correctly, Crossfire's yellow indicator verifies that air is flowing freely from one tire to the other, equalizing the load

Mfg. No.	Description
CF-PSI-RH	Crossfire Rubber Hoses
CF-PSI-HD	Crossfire Heavy Duty Hoses
CF-PSI-ST	Crossfire Stainless Steel Hoses
SS-PSI-RH	Super Single Rubber Hoses
SS-PSI-ST	Super Single Steel Hoses

Crossfire valves are available for desired air pressures of 50 to 150 PSI in 5 PSI increments.

Example: **CF-100-ST** = Crossfire valve, 100 PSI air pressure, stainless steel hose with AT & BH brackets.



# VALVE HARDWARE TOOLS



## VALVE INSERTION AND REMOVAL TOOLS



Ascot No.	Mfg. No.	Description
469-00014	VT-014	Valve Installation Tool with Rubber Block
469-00040	00040R	Valve Stem Puller with Rubber Boot
469-00992	992	Tubeless Tire And Tire Valve Inserting And Removing Tool. For All Sizes Of Snap-In Passenger Car Tire Valves
469-01124	VT-1124	Tubeless Tire Valve Service Tool. Pull-A-Stem Tool Pulls Old Valves Or Inserts New Valves. Tool Fits All Sizes Or Lengths
469-03333	VT-03P	Plastic Valve Puller with Metal Rod Insert

## VALVE CORE INSERTION AND REMOVAL TOOLS



Ascot No.	Mfg. No.	Description
469-00001	CT-1	Pocket-Size Valve Core Remover
469-00003	CT-3	Heavy Duty Standard Valve Core Remover
469-00005	CT-5	For Both Standard and Large Bore Valves
469-00607	607	Has Plastic Screwdriver Handle For Better Grip And Leverage, <b>Made in USA</b>
469-01638	1638A	Heavy Duty Professional Plastic Valve Puller. Steel Tube Reinforced Handle Provides Extreme Rigidity, Safety Orange Color For Easy Visibility. Protects Wheels From Damage During Installation/Removal Of Snap-In Valve Stems
469-15407	15407	Angled Tubeless Tire Valve Inserting And Removing Tool

## STANDARD BORE VALVE TOOLS



Ascot No.	Mfg. No.	Description
469-00612	TL-612	<b>Standard Bore Core Tool.</b> With An Overall Length Of 8" And Oversized Handle
469-00625	TL-625	<b>Standard Bore Core Tool.</b> With Recessed Probe, Fits In Pocket
469-00630	TL-630	<b>Hex Nut Driver.</b> For 500 Series Truck. For Tubeless Clamp-In Metal Valves. For All Lengths Of Tubeless Truck Valves
469-00632	TL-632	<b>Truck Extension Service Tool.</b> Tightens Both Metric European And Domestic Type Extensions. Broached To Engage The Metric Hex At The Extension Top and Will Reach The Hex On A 7" U.S.A. Type Extension
469-00633	TL-633	<b>Valve Cap Tool.</b> Easy To Remove And Install Valve Caps On Inside Dual Wheels. For Aluminum Wheels
469-00006	CT6-10	• <b>STANDARD BORE VALVE CORE TOOL</b> • Has a plastic screwdriver handle for better grip and leverage • 10 Pack

## HALTEC CORPORATION SUR-LOCK VALVE TOOLS

• Special design allows the valve core to stay attached to the tool after it is removed from the valve • Great tool to keep the valve core from getting dropped or lost



Ascot No.	Mfg. No.	Description
469-00131	TL-131	For Bicycles
469-00132	TL-132	For Cars. 1-3/4" Length
469-00133	TL-133	For Trucks. 8-1/4" Length
469-00134	TL-134	For Large Bore Cores. 10-1/2" Length



## VALVE HARDWARE TOOLS



## VALVE AND CORE TOOLS

Ascot No.	Mfg. No.	Description
469-00002	CT-2	<b>Black Heat Treated Heavy Duty Tire Valve Repair Tool.</b> 4-In-1 Standard Valve Tool Repairs Cap Threads, Repairs Core Threads. Easy-Out Feature For Removing Damaged Cores & Removing Standard Caps
469-00004	CT-4	<b>Economy Standard Bore 4-Way Tool</b>
469-00011	VT-11	<b>Cable Valve Fishing Tool.</b> Valve Core Wrench And Deflating Pin With Flexible Cable For Fishing Valve Through Rim Hole
469-00018	VSW18	<b>Valve Stem Ratchet.</b> For TR570 Series Valves
469-00020	VSW20	<b>Valve Stem Ratchet.</b> For TR540 Series Valves
469-00021	VT-21	<b>Double-Use Tool.</b> Removes Valve Cores. Screws On Valve Mouth To Open Core
469-00081	TVT-81	<b>Heavy Duty 4-Way Valve Core Tool</b>
469-00567	567A	<b>Core Removing Tool.</b> Screwdriver Grip. Easy Out For Removing Broken Cores
469-00609	TL-609	<b>Chain Valve Fishing Tool.</b> Guides Valve Smoothly Through Rim Hole While Mounting Tire & Tube
469-01115	VT-1115	<b>Valve Core Tool.</b> For Inserting And Removing Valve Cores. Long Hex Body For Easy Access
469-05262	5262	<b>Tube Deflating Aspirator.</b> Screwing Aspirator Onto Valve Mouth And Applying Air Chuck To Threaded Inlet Creates Vacuum That Siphons Air From Tube
469-11115	VT-1115I	<b>Recessed Valve Core Tool.</b> Core Tool Is Recessed Into The Handle. Design Eliminates The Possibility Of The Tool Poking Through A Shirt Pocket. Easily Fits Into A Shirt Pocket. Includes Clip
469-23430	VGB	<b>Tube Deflator.</b> Removes Air Completely. Quickly After The Valve Core Is Moved. Fits On Every Type Of Standard Bore Valve
469-32850	3285D	<b>Lock-On Screwdriver Core Tool.</b> 5" Effective Length. Allows The Valve Core To Stay Attached To The Tool After It Is Removed From The Valve. Protects The Valve Core From Loss. Aluminum Handles Provide A Sturdy Grip For Inserting And Removing Valve Cores
469-32851	3285E	<b>Lock-On Screwdriver Core Tool.</b> 6.5" Effective Length. Allows The Valve Core To Stay Attached To The Tool After It Is Removed From The Valve. Protects The Valve Core From Loss. Aluminum Handles Provide A Sturdy Grip For Inserting And Removing Valve Cores
469-52000	S-2	<b>Valve Capper Inner Dual Valve Core/Cap Tool</b>
469-00673	673-D	<b>Screwdriver/Core Tool.</b> Lock-On Feature For The Valve Core. Metal Pocket Clip. Flat-Head Screwdriver Tip



## TIRE GAUGES



## BRAKE LINING THICKNESS GAUGE

• Made of durable metal • Each blade features both SAE and Metric measurements • Clear and accurate depth readings for a quick and easy reading • Color coded brake gauge provides effective identification • THE SET IS DIVIDED INTO 3 COLORS: Red, Yellow and Green • Red 2 mm (.787") Brakes must be serviced • Yellow 4 mm (.1575") Brakes must be serviced • Made in Taiwan



Ascot No.	Mfg. No.	Description
411-97840	BG-97840	3-Piece Brake Lining Thickness Gauge
411-65201	B650201	8-Piece Brake Lining Thickness Gauge

## TRUCK SERVICE GAUGES

• Wide variety of service gauges to accommodate the numerous tire and wheel configurations encountered by tire service personnel • Available in chrome plated or protective black epoxy finish as indicated • Calibrated from 10-150 PSI in 2-pound increments • Nylon or metal indicator bars



Ascot No.	Mfg. No.	Description
476-10480	1048T	Dual Chuck Service Gauge, Straight-On/Angled With Metal Bar, Black Epoxy Finish
476-10135	GA-135	Angle Chuck With Nylon Bar
476-11135	GA-135S	Same As Above, Angle Chuck With Metal Bar
476-10155	GA-155	Straight-On With 30° Reverse Chuck
476-10165	GA-165	Same As Above, Straight-On With 30° Reverse Chuck, Black Epoxy Finish
476-11148	1048S	Dual Straight Service Gauge, Short Length
476-11155	GA-155S	Same As Above, Straight-On With 30° Reverse Chuck, Metal Bar
476-11048	1048-ADJ	Internal Adjustable Field Service Gauge
476-10185	GA-185	Dual Foot Service Gauge With Nylon Bar, 180° Chuck, Chrome Plated
476-11185	GA-185S	Same As Above, Dual Foot Service Gauge With Metal Bar

## TIRE TREAD DEPTH GAUGES



Ascot No.	Mfg. No.	Description
454-00190	HT-190L	3-Color All-Metal Tread Depth Gauge
454-00599	595	Tire Tread Depth Gauge. Used To Measure Tire Tread Depth In 1/32" Increments: 0-1"
454-00712	NS712	All Metal Tread Depth Gauge
454-01420	HT-1420	Truck Tire Depth Gauge. Calibrated in mm and 1/32nd of Inch. Measures Shoulder Wear and Tread Depth. Durable Metal Construction
454-01599	599-C	3-Color Tread Depth Gauge
454-05127	5127	Red-Yellow-Green Metal indicator bar with black numbers 0-32In 32NDS



## TIRE GAUGES



### DIGITAL TREAD DEPTH GAUGE

- Made from strong carbon fiber composite • Zero setting in any position • Metric, decimal inch and fraction inch toggle • Large LCD display

STRONG AND DURABLE



454-00209



The Digital Tread Depth Gauge in use.

Ascot No.	Mfg. No.	Description
454-00209	NS209S	Digital Tread Depth Gauge

### DIGITAL POCKET GAUGE

- RANGE: 0-150 PSI in .5 PSI increments • ACCURACY:  $\pm 1\%$  PSI accuracy • Large LCD display • Red backlight • Angled chuck head

LARGE LCD DISPLAY



476-32380

Ascot No.	Mfg. No.	Description
476-32380	3238P	Digital Pocket Gauge w/ Angle Chuck - 1-150 PSI

### DIGITAL TRUCK TIRE GAUGE

- OPERATING RANGE: 0-180 PSI • RESOLUTION: 0.5 PSI • ACCURACY:  $\pm 1\%$  + 0.5 PSI at 100 PSI • Calibration in BAR, KG/CM<sup>2</sup>, KPA and PSI • Auto power off, simple operation • Built-in backlight with clear, large LCD display • Replaceable LED battery • POWER SOURCE: Lithium & LR 44 Alkaline

AUTO POWER OFF



478-03238

Ascot No.	Mfg. No.	Description
478-03238	N/A	Digital Truck Tire Gauge



### DIAL GAUGE

- Calibrated 0 to 160 PSI in 5 PSI units and 150 to 1100 in kPa metric scale • 14" flexible hose • Holds pressure readout until released

FLEXIBLE HOSE



476-00274

Ascot No.	Mfg. No.	Description
476-00274	GA-274	Dial Gauge, 0-160 PSI

### DILL ADJUSTABLE TRUCK TIRE GAUGES

Ascot No.	Mfg. No.	Description
476-07125	7125H	Straight and 30 Degree Reverse, Chrome, White Nylon Bar
476-07233	7233	360 Deg. Swivel for Standard and Large Bore
476-07262	7262	Straight and 30 Degree Reverse, Black, Black Metal Bar
476-07275	7275RB	Adjustable Truck Service Gauge with 25 Degree Offset Angle Chuck (Internally Adjustable)
476-07285	7285R	Dual Foot Service Gauge With Reverse Angle Chuck (Internally Adjustable)
476-17275	7275RBE	Adjustable Truck Service Gauge with 25 Degree Offset Angle Chuck (Externally Adjustable)
476-17285	7285E	External Adjustable Truck Service Gauge
476-27275	7275	Dual Angle, Chrome, Black Metal Bar
476-37285	7285	Straight and 30 Degree Reverse, Chrome, Black Metal Bar



### MASTER TEST GAUGE

- For checking accuracy of service and pencil gauges • Has dual foot chuck and a retaining valve to hold pressure reading after gauge is removed from valve to within  $\pm 2\%$  of total dial reading • Includes protective case • MADE IN THE USA



Shown in included protective case



476-08860

Ascot No.	Mfg. No.	Description	Range
476-08860	8860C	Master Test Gauge	0 - 160 PSI



476-07275

476-17285

### ADJUSTABLE FIELD SERVICE GAUGES

- Field adjustable truck service gauges • External Adjustment Screw makes calibration quick & easy • Adjustable Calibration
- Plated finish provides corrosion protection and great looks • 4-sided metal indicator bar is durable and easy to read • Hang-up ring provides a convenient method of storage • Flat-head screwdriver required for calibration

ADJUSTABLE CALIBRATION

EXTERNAL ADJUSTMENT SCREW



The External Adjustment Screw makes calibration quick & easy.

476-01046

476-11048

Ascot No.	Mfg. No.	Description
476-00135	135S-RCL	Adjustable Dual Foot Service Gauge
476-00165	165S-RCL	Adjustable Dual Foot Service Gauge
476-00185	185S-RCL	Adjustable Dual Foot Service Gauge -180 Degree Reverse Chuck
476-00250	250S-RCL	Adjustable Large Bore Pencil Gauge
476-00255	255S-RCL	Adjustable Large Bore Swivel Gauge
476-01046	1046-ADJ	Screwdriver Adjustable Calibration Gauge
476-11048	1048-ADJ	Internal Adjustable Metal Bar Gauge



## CHECKING STATIONS



## MASTER AIR GAUGE CHECKING STATIONS

• **INFLATION RANGE:** 0-200 PSI • **ACCURATE TO:** ±1 PSI • Designed to allow users to quickly and accurately check their air gauges and inflator gauges • **THREE CHECKING POINTS:** standard valve port, large bore valve port & female coupler port • Most accurate checking station on the market • Equipped with a regulator and filter for proper air and water filtration • CARB Certified • Back-lit readout for ease of use • Can be mounted to a bench or a wall



476-35020



476-35021

Ascot No.	Mfg. No.	Description
476-35020	T53502A	Digital Gauge Checking Station
476-35021	T53502AL	Air/Liquid Gauge Checking Station



## DILL AIR GAUGE CHECKING STATIONS

• A quick accurate way for tire dealers to check the accuracy of air gauges - a must for facilities that need to comply with California standards • 0-160 psi liquid filled gauge • Access valve mounted on a pressure reservoir • 1/4 inch NPT filter/regulator to remove contaminants from compressed air • A certificate of accuracy for ISO records • Designed to easily bolt to a wall or table • **MADE, TESTED & CERTIFIED IN THE USA**



476-08500



476-08501

Ascot No.	Mfg. No.	Description
476-03502	3502	Replacement Digital Air Gauge
476-08500	8500	Dill Air Gauge Checking Station
476-08501	8500D	Dill Digital Air Gauge Checking Station
476-08900	8900	Replacement Dial Air Gauge (Fully Calibrated)



EASILY BOLT TO WALL OR TABLE

QUICK &amp; ACCURATE

## DILL USA GAUGES &amp; CHUCKS



## DILL USA DUAL FOOT TRUCK GAUGES

Ascot No.	Mfg. No.	Range	Description	Finish	Qty./Pack
476-07248	7248-USA*	20-120 PSI	Dual Angle Foot Chuck	Chrome	10
476-07263	7263-USA*	20-120 PSI	Straight-On 30° Reverse Chuck	Black Powder	10
476-07278	7278-USA*	20-120 PSI	Straight-On 30° Reverse Chuck	Chrome	10

## DILL USA TRUCK SERVICE GAUGES

Ascot No.	Mfg. No.	Range	Description	Finish	Qty./Pack
476-00001	SG1	10-150 PSI	Dual Foot Head; Chrome Body with Black Markings on a White Bar	Chrome	1
476-00002	SG2	10-150 PSI	Dual Foot Head; Chrome Body with White Markings on a Black Bar - Adjustable	Chrome	1
476-00003	SG3	10-150 PSI	Dual Foot Head; Black Powder Coated Body with White Markings on a Black Bar - Adjustable	Chrome	1

\* Denotes gauges meet the proposed California Regulation for Under Inflated Vehicle Tires No. 95550.

## DILL USA AIR CHUCKS

Ascot No.	Mfg. No.	Length	Description	Finish	Qty./Pack
478-06172	6172-USA	6"	Angle Chuck for Inner Dual Wheels with Tilted Valves	Chrome	10
478-06173	6173-USA	6"	Lock Feature Straight-On 180° Degree Reverse Angle Chuck	Chrome	10
478-06174	6174-USA	14"	Extra Long Length Lock Feature Straight and 30° Reverse Angle Chuck	Chrome	10
478-16174	6174-BLK-USA	14"	Extra Long Length Lock Feature Straight and 30° Reverse Angle Chuck	Black Poly	10
478-06175	6175-USA	6"	Lock Feature Straight-On 30° Reverse Angle Chuck	Black Poly	10
478-06176	6176-USA	6"	For Standard Air Line Service	Chrome	10
478-06999	6999-USA	6"	Straight with 30° Reverse Angle Chuck	Chrome	10
478-16999	6999L-USA	6"	Same as 6999-USA Except for Lock-On	Chrome	10

## DILL USA CLIP-ON AIR CHUCKS

Ascot No.	Mfg. No.	Connection	Description	Finish	Qty./Pack
478-62930	6293C-USA	5/16" Barbed Fitting	Straight Clip Chuck for European Type Tire Changer, Normally Open	Silver Clip	10
478-62931	6293D-USA	1/4" NPT Female	Straight Clip Chuck for European Type Tire Changer, Normally Open	Silver Clip	10
478-62932	6293E-USA	1/4" NPT Female	Straight Clip Chuck for European Type Tire Changer, Flow Through	Black Clip	10
478-62933	6293	1/4" NPT Female	Ball Foot Chuck, Normally Closed	Silver Clip	10
478-62934	6293A	1/4" NPT Female	Clip Only for 6293 & 6293B Clip-On Chuck	Silver Clip	10
478-62935	6293B	1/4" NPT Female	Ball Foot Chuck, Normally Open	Black Clip	10



## AIR CHUCKS



### DUAL FOOT AIR CHUCKS



Ascot No.	Mfg. No.	Description
478-00335	CH-335	Angled Chuck, Plated Finish (Normally Closed)
478-01330	6568-FT	Dual Foot Chuck, 1/4" FPT, 6" Long, Lock-On Threads (Normally Open)
478-01335	CH-335-OP	Angled Chuck, Plated Finish (Normally Open)
478-01350	CH-350-LO	Straight-On/Angled Chuck, Protective Black Epoxy Finish (Normally Closed)
478-01351	6568T-FT	Straight-On/Angled Chuck, Black Epoxy Finish (Normally Open)
478-03300	CH-330-LO	Straight-On/Angled Chuck, With Lock-On Threads (Normally Closed)
478-03301	CH-330	Straight-On/Angled Chuck (Normally Closed)
478-03330	CH-333-LO	Straight-On/Angled Chuck, 14" Long (Normally Closed)
478-03370	CH-370-LO	Straight-On/180° Chuck, 1/4" NPT (Normally Closed)
478-05885	6585LB	Large and Standard Bore Chuck, 1/4" NPT (Normally Closed)

### ANGLE HEAD AIR CHUCKS

Ascot No.	Mfg. No.	Description
478-03238	3238P-C	Angle Head Air Chuck - Chrome Finish



### BALL FOOT CHUCKS




Ascot No.	Mfg. No.	Description
478-00305	CH-305	Ball Foot Chuck, 1/4" Female Thread (Normally Closed)
478-00315	CH-315	Ball Foot Chuck With Lock-on Clip, 1/4" Female Thread (Normally Closed)
478-00325	CH-325	Ball Foot Chuck With Lock-on Clip, 1/4" Female Thread (Normally Open)
478-05451	—	Ball Foot Chuck With Lock-on Clip, 1/4" Female Thread (Normally Closed - Alligator)
478-00707	—	Replacement Washer, For 478-05451 Ball Foot Chuck
478-04500	—	Air Chuck Clip, For All Ball Foot Chucks
478-04501	—	Economy Clip for Clip-On Ball Foot Air Chuck

### EUROPEAN-STYLE CLIP-ON CHUCKS

Ascot No.	Mfg. No.	Description
478-00001	N-1200	European-Style Clip-On Chuck, Serrated Shank for 1/4" I.D. Hose, Silver (Normally Open)
478-02985	CH-360	European-Style Clip-On Chuck, 1/4" Female Fitting, Silver Clip (Normally Closed)
478-02995	CH-360-OP	European-Style Clip-On Chuck, 1/4" Female Fitting, Black Clip (Normally Open)
478-06293	6293-5	European-Style Clip-On Chuck, 1/4" Barbed Fitting, Straight Clip Chuck, Small Head Design, Silver Clip (Normally Open)

### LOCK-ON AIR CHUCKS

Ascot No.	Mfg. No.	Description
478-00340	CH-340	Lock-On Air Chuck, 1/4" NPT Female Thread, Securely Locks Onto Valve When Sleeve Is Pushed Forward
478-01340	CH-340-OP	Lock-On Air Chuck, Available For Use With Tire Changers
478-05265	H-5265	Lock-On Air Chuck, Specially Designed To Lock Onto The Cap Of A Standard Bore Valve Stem When The Sliding Sleeve Is Pushed To Forward Position



### REVERSE ANGLE LOCK-ON AIR CHUCK

- Reverse angle lock-on chuck allows easy access to outer dual valve



Ascot No.	Mfg. No.	Description
478-00345	CH-345	Reverse Angle Lock-On Air Chuck (Normally Closed)
478-01345	CH-345-OP	Reverse Angle Lock-On Air Chuck (Normally Open)

### LONG REACH STRAIGHT LOCK-ON CHUCK

Ascot No.	Mfg. No.	Description
478-00346	CH-346	Long Reach Straight Lock-On Chuck (Normally Closed)
478-01346	CH-346-OP	Long Reach Straight Lock-On Chuck (Normally Open)

### EUROPEAN-STYLE CLIP-ON CHUCK



Ascot No.	Mfg. No.	Description
478-02975	CH-360S	European-Style Clip-On Chuck, 1/4" Female Fitting - With Spring Loaded Deflector Pin

478-00345



### TRUCK LOCK-ON EXTENSION CHUCK

- Extended reach for dual wheels • Easy on/off application
- Steel pins for increased service life • Automatic locking design
- Improves seal on flow through caps • 22" overall length



478-00346



478-32072



EXTENDED REACH FOR DUAL WHEELS

Ascot No.	Mfg. No.	Description
478-32072	32071-L2	Truck Lock-On Extension Chuck



## AIR CHUCKS



### LARGE BORE GAUGES



Ascot No.	Mfg. No.	Description
454-01410	N-1410	Off-Highway Tire Tread Depth Gauge. Calibrated With 32nds And MM. Magnified Sight Glass For Easy Readability
454-0531	5131	Large Bore Tread Depth Gauge
454-05300	5300	Tire Tread Depth Gauge w/ Magnifying Lens - Calibrated with 32nds & MM
476-02555	GA2555-RCL	Recalibrateable Large Bore Swivel Gauge. Nickel Plated Brass. Metal Slide Bar. Calibrated 10-150 PSI in 2 lb. Units. Swivels 360° for Those Hard-to-Reach Valves
476-07233	7233	Dill Swivel Gauge
476-10240	GA-240	Straight-On Gauge. 20 - 120 PSI
476-10250	GA-250S	Swivel Gauge. Nickel Plated Brass. Plastic Bar. Calibrated 10 - 150 PSI In 2 lb. Units. Swivels 360° For Those Hard-to-Reach Valves
476-10255	GA-255S	Swivel Gauge. Nickel Plated Brass. Metal Slide Bar. Calibrated 10 - 150 PSI In 2 lb. Units. Swivels 360° For Those Hard-to-Reach Valves

### LARGE BORE AIR CHUCKS



Ascot No.	Mfg. No.	Description
478-00322	322	Large Bore Dual Foot Air Chuck. 45° Chuck For Easy Access To Valve. 1/4" NPT Female Thread
478-00326	326	Screw-On Air Chuck. 458"-26 Internal Thread. 1/2" NPT External Thread. Full Flow For Seating Of Tire Beads
478-00328	AC-B10	Short Lock-On Air Chuck. Locks On Valve When Cocked On Threads. Greater Air Flow And Seal. Cannot Be Blown Out If Seal Fails. 1/4" NPT Thread
478-00377	AC-B11	Long Lock-On Air Chuck
478-04660	AC-B12	Clip-On Air Chuck. Locks Onto Valve When Sleeve Is Pushed Forward, Releases When Sleeve Is Pulled Back. 1/4" NPT Female Thread
478-06190	6190	Quick Connection Inflation Gauge. For Use With 6185 Check Valve. Sliding Sleeve Locks Chuck Onto Check Valve. Permits Unrestricted Air Flow
478-10013	10013	Large Bore Screw-On Chuck. Fits 3/8" ID Air Hose

## INFLATOR GAUGES



### RPG DIGITAL INFLATOR

- Auto on/off operation • **MAX INFLATION:** 174 PSI • Accuracy exceeds EC Standards • Multi-scale gauge • Serial/batch numbered • Backlit digital display • Wire sheathed hose eliminates kinking • Impact absorbing bumpers • Rubber grip on chuck
- Tough die cast aluminium body • 20" hose with hold-on chuck
- Quick and easy to use • Includes certificate of calibration



### MULTI-GAUGE SCALE:



Ascot No.	Mfg. No.	Description
477-10312	10.3012RPG	Digital Inflator w/ 20" Hose and Hold-On Air Chuck



### AUTOMATIC INFLATOR

- All the features of a wall mounted inflator in a portable hand held unit
- **BUILT-IN OVERPRESSURE SETTING**
- FUNCTION:** OPS function that allows the tire to be inflated to a certain pressure then deflates automatically to a normal operating pressure, used to seat tires to rims • Auto on/off operation • **MAX INFLATION:** 174 PSI • Accuracy exceeds EC Standards • Multi-scale gauge • Serial/batch numbered • Backlit digital display • Wire sheathed hose eliminates kinking • Tough poly carbonate/ABS body • Two programmable pre-set preset buttons • Fast and safe 5' hose with lock-on chuck • Built-in rechargeable lithium-ion battery • Up to 15 hours of continuous use • Includes AC adapter for charging • Includes certificate of calibration



Ascot No.	Mfg. No.	Description
477-11612	11.0612NA	Automatic Inflator - 5' Hose w/ Clip-On Air Chuck



### RPG DIGITAL TIRE INFLATORS

- **INFLATION RANGE:** 0-174 PSI • **ACCURATE TO:**  $\pm 1.2$  psi
- Auto ON, upon air pressure sensing • Large tilted LCD display with backlight and 90 second auto OFF • Multi-scale gauge • Die-cast aluminum unit with rubber protective sleeve • Lightweight handle and trigger • Wire sheathed hose on flex area of hose to eliminate kinking

Ascot No.	Mfg. No.	Description
477-11235	11.0723ASC5	RPG Digital Inflator: 20" Hose w/ Clip-On Chuck
477-11237	11.0723ASC7	RPG Digital Inflator: 6' Hose w/ Clip-On Chuck
477-11239	—	Replacement 6' Hose w/ Clip-On Chuck for Digital Inflators
477-11240	—	Replacement 20" Hose w/ Clip-On Chuck for Digital Inflators





## INFLATOR GAUGES



## PRO DIGITAL TIRE INFLATOR

• **ACCURATE:** Measures in PSI (0-255), kPa (0-1800), kg/cm<sup>2</sup> (0-18), and Bar (0-18). Meets ANSI/ASME B40.1 standards • **GAUGE SWIVELS:** Reads at any angle, lays flat in your toolbox. Gauge protected by rubber boot • **BACKLIT DISPLAY:** Auto-on when tire pressure is detected; Auto-off after inactivity to save battery • **EASY HANDLING:** Durable/ergonomic grip. Quick fine tuning in case you exceed the target pressure • **6" STRAIGHT FOOT CHUCK:** Full swivel and hose w/threaded lock-on design, enabling hands-free inflation

Ascot No.	Mfg. No.	Description
477-00577	S-577D	Pro Digital Tire Inflator - 15" Hose w/ Lock-On Threads



## DIGITAL HAND-HELD TIRE INFLATOR\*

• **INFLATION RANGE:** 0 - 174 PSI • **ACCURACY:** +/- .2 PSI • 6' Hose • Lightweight shock-resistant design • High specification ceramic sensor • Long life, easily replaceable battery • Available in custom hose lengths and chuck styles • Valve has provisions for checking air pressure during inflation • Threaded for 1/4" male NPT hose fittings

Ascot No.	Mfg. No.	Description
477-10001	Accura I	Digital Hand-Held Tire Inflator

\* This gauge provides more accurate air pressure readings which is essential with TPMS.



**WARNING:** Never inflate a tire on a multi-piece rim (a rim made up of 2 or more separate pieces) unless the tire and rim are mounted in OSHA regulation 29-CFR Part 1910.177 or D.O.T. approved tire inflation cage. OSHA Regulations require that an inflator gauge must be equipped with a lock-on chuck and have a hose extension sufficiently long for the operator to stand clear of the possible trajectory of a multi-piece rim.

www.ascotsupply.com

**WARNING:** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



## DILL DIGITAL INFLATORS W/ STAINLESS STEEL HOSE

• Two-foot, kink-resistant, stainless steel hose • Large backlit display • Auto on/off feature • Dual foot or Clip-on Made in the USA air chuck • **Assembled and tested in the USA**

Ascot No.	Mfg. No.	Description
477-72623	7260-S2-6293E	Digital Inflator - 2 Ft. Stainless Steel Hose - USA-Made Clip-On Chuck
477-72629	7260-S2-6999FT	Digital Inflator - 2 Ft. Stainless Steel Hose - USA-Made Dual Foot Chuck

## MK4 HEAVY DUTY HAND-HELD INFLATOR

• **NEW VIEWING WINDOW:** Larger window gives 20% greater field of viewing • **LIGHTER WEIGHT:** Gauge body weighs 2.035lbs, less work strain and easier for repetitive use • **BIOMORPHIC SHAPE:** Ergonomic, easier to use and less prone to damage when dropped • **NEW VALVE MECHANISM:** Simplified 2-stage mechanism design prevents user having to "push" against full line pressure on deflate preventing fatigue • **NEW PISTON & SEAL DESIGN:** New design, less drag, reduced friction & less movement inertia means no internal corrosion, no sticking and no skewing of accuracy • **NEW CLEAR LITHOGRAPHIC DESIGN:** Fast and accurate reading of results • **MAXIMUM INFLATION PRESSURE:** 160 PSI

Ascot No.	Mfg. No.	Description
477-10004	MK4	MK4 Heavy Duty Hand-Held Inflator



477-72623



477-10004

NEW PISTON &amp; SEAL DESIGN



## DILL DIGITAL TIRE INFLATOR GAUGE

• Digital backlight readout • 0-170 PSI range • 2 or 6ft. hose • Clip-on or dual-foot chuck • **ASSEMBLED AND TESTED IN THE USA**



477-76063

Ascot No.	Mfg. No.	Description
477-76023	7260-2-6293E	Digital Inflator - 2 Ft. Hose - Clip-On Chuck
477-76029	7260-2-6999FT	Digital Inflator - 2 Ft. Hose - Straight Chuck
477-76063	7260-6-6293E	Digital Inflator - 6 Ft. Hose - Clip-On Chuck
477-76069	7260-6-6999FT	Digital Inflator - 6 Ft. Hose - Straight Chuck

## DILL DIGITAL INFLATORS W/ STAINLESS STEEL HOSE

• Two-foot, kink-resistant, stainless steel hose • Large backlit display • Auto on/off feature • Dual foot or Clip-on Made in the USA air chuck • **Assembled and tested in the USA**



477-76263

Ascot No.	Mfg. No.	Description
477-72623	7260-S2-6293E	Digital Inflator - 2 Ft. Stainless Steel Hose - USA-Made Clip-On Chuck
477-72629	7260-S2-6999FT	Digital Inflator - 2 Ft. Stainless Steel Hose - USA-Made Dual Foot Chuck



## HEAVY DUTY HOSE INFLATOR

• Has two separate clip-on chucks with five-foot hoses • One chuck, CH-360, fits standard bore valves and the other, H-4660A, large bore valves • Has springloaded, hand-operated valve and has provisions for checking air pressure during inflation • Threaded for 1/4" male NPT hose fittings



Ascot No.	Mfg. No.	Description
477-00404	I-404	Heavy Duty Hose Inflator




477-00404

## PRECISION DIGITAL TIRE INFLATOR

• Most accurate pressure gauge on the market (0-160 PSI), Extreme  $\pm 0.05\%$  Accuracy • **EASY-TO-READ DIGITAL DISPLAY:** Large articulating easy to read digital display that is easy to read in any light condition, at any angle, display automatically adjusts for left or right handed use, or vertical portrait mode • High contrast electrophonic screen • **AUTO**

**ON/OFF FEATURE:** Powers on when air pressure is detected, power off after 120 seconds of inactivity • Deflation button • Job site work light, valve cap holder, integrated hand protection storage

Ascot No.	Mfg. No.	Description
477-00587	S-580e-KIT	Precision Digital Tire Inflator - Dual Foot Chuck

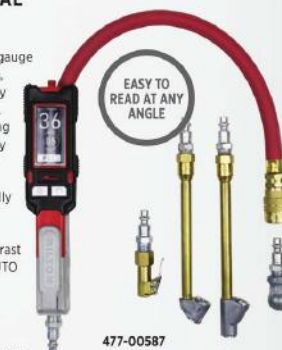

477-00587

**WARNING:** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com





## AIR LINE INFLATORS

- Ideal for gauging and inflating dual tires on trucks and buses as well as passenger cars and light trucks
- Solid brass indicator bar
- Allows operator to stand away while inflating and deflating tires
- Bleeder valve allows user to adjust tire pressure without touching either the tire or valve stem



## INFLATOR GAUGES



Standard #	Hand Held #	Digital Body #	Description
<b>AIR LINE INFLATOR GAUGE</b>			
477-00001	477-20001	477-30001	12" Hose w/ Dual Foot Chuck
477-00011	N/A	477-30011	12" Hose w/ Tapered Chuck
477-00111	477-20111	477-30111	12" Hose w/ Lock-On Chuck
477-01111	477-21111	477-31111	12" Hose w/ No Chuck
477-11111	N/A	N/A	12" Hose w/ Lock-On Chuck & Bleeder Valve

<b>SAFETY INFLATOR GAUGE</b>			
477-00002	477-20002	477-30002	3" Hose w/ Ball Foot (Clip-On) Chuck
477-00003	477-20003	477-30003	3" Hose w/ Straight Lock-On Chuck
477-00004	477-20004	477-30004	6" Hose w/ Ball Foot (Clip-On) Chuck
477-00005	477-20005	477-30005	6" Hose w/ Straight Lock-On Chuck
477-00008	477-20008	477-30008	9" Hose w/ Ball Foot (Clip-On) Chuck
477-00009	477-20009	477-30009	9" Hose w/ Straight Lock-On Chuck
477-00010	477-20010	477-30010	12" Hose w/ Ball Foot (Clip-On) Chuck
477-00012	477-20012	477-30012	12" Hose w/ Straight Lock-On Chuck
477-00014	477-20014	477-30014	6" Hose w/ No Chuck
477-00015	477-20015	477-30015	15" Hose w/ Straight Lock-On Chuck
477-00020	477-20020	477-30020	20" Hose w/ Straight Lock-On Chuck
477-00033	477-20033	477-30033	3" Hose w/ Euro-Style Chuck
477-00066	477-20066	477-30066	6" Hose w/ Euro-Style Chuck
477-00099	477-20099	477-30099	9" Hose w/ Euro-Style Chuck
477-00112	477-20112	477-30112	3" Hose w/ No Chuck
477-00113	477-20113	477-30113	3" Hose w/ Sleeve Chuck
477-00115	477-20115	477-30115	6" Hose w/ Black Epoxy Lock-On Chuck
477-00118	477-20118	477-30118	9" Hose w/ No Chuck
477-00144	477-20144	477-30144	12" Hose w/ Euro-Style Chuck
477-01112	477-21112	477-31112	12" Hose w/ No Chuck



Safety Inflator Gauge with Straight Lock-On Chuck



Air Line Inflator Gauge

## LARGE BORE AIR LINE INFLATOR GAUGES

- Large Bore inflation unit with in-line gauge • Equipped with AC-B12 large bore chuck • Gauge is calibrated 10-140 PSI in 2 lb. increments • Available in hose lengths of 6', 9' & 12' • 477-01006 Similar to Haltec I-409



Safety Inflator Gauge with Ball Foot (Clip-On) Chuck



Ascot No.	Description
477-01006	6' Hose with AC-B12 Large Bore Chuck
477-01009	9' Hose with AC-B12 Large Bore Chuck
477-01012	12' Hose with AC-B12 Large Bore Chuck
477-00409	6' Hose with Large Bore Inflation Gauge

## HEAVY DUTY TIRE CHANGERS



### CM27T HEAVY DUTY TRUCK TIRE CHANGER


- For tube and tubeless type tires used on over-the-road Class 8 commercial trucks and some off-road tractor tires and rims
- The pivoting four-jaw clamping chuck aids as a wheel lift and prevents liabilities of manual truck tire changing by allowing the machine to perform all the heavy lifting and service work
- Mobile cable control unit
- Bi-directional rotation
- Self centering universal wheel chuck
- Rim pliers and rim lever standard



446-00027

### SM56T HEAVY DUTY TIRE CHANGER

- For tube and tubeless tires used on heavier off-road farm and commercial use tractors
- Mobile cable control unit
- Two speed hydraulic pump motor
- Bi-directional rotation
- Self centering universal wheel chuck
- Self-centering four jaw clamping jaw drive system which doubles as a wheel lift
- Rim pliers and rim lever standard

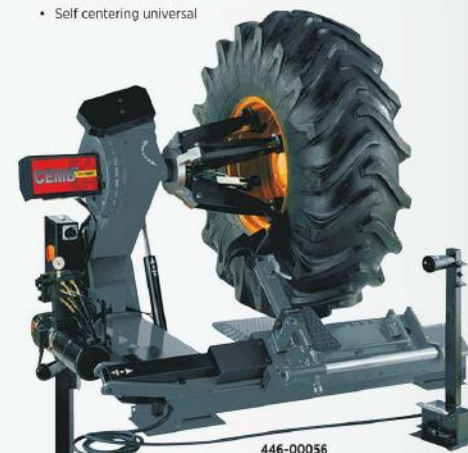

446-00056



### CEMB HEAVY DUTY TIRE CHANGER SPECIFICATIONS

Ascot No.	Mfg. No.	Power Supply	Rim Clamping Range	Max Tire Outside	Max Tire Width	Max Tire Weight	Bead Breaker Force	Shipping Weight
446-00027	CM27T	220 VAC	13" - 27"	63"	30"	3300 lbs.	4100 lbs.	1415 lbs.
446-00056	SM56T	220 VAC	14" - 46"	90.5"	42"	3300 lbs.	6000 lbs.	2000 lbs.





## HEAVY DUTY TIRE CHANGERS

### HD700 HEAVY DUTY TIRE CHANGER

- For demounting and mounting inner tube and tubeless type tires for trucks, buses and industrial vehicles with annular groove or elastic ring type rims
- Can be used to work easily on any rim size up to 26"

### HD1300 HEAVY DUTY TIRE CHANGER

- Extremely compact dimensions for working with complete peace of mind on truck, agricultural machine and earth moving machine wheels
- Features a sturdy and robust operated tool arm

### HD1300R HEAVY DUTY TIRE CHANGER (WIRELESS)

- Extremely compact dimensions for working with complete peace of mind on truck, agricultural machine and earth moving machine wheels
- Features a sturdy and robust operated tool arm



#### CORGI TIRE CHANGER SPECIFICATIONS

Ascot No.	Mfg. No.	Power Supply	Max Tire Outside	Max Rim Width	Gross Shipping Weight
443-01804	HD700	208 vac +/-10%, 3 ph., 30 amp circuit	63"	26"	1500 lb.
443-03504	HD1300	208 vac +/-10%, 3 ph., 30 amp circuit	86"	56"	2450 lb.
443-03514	HD1300R	208 vac +/-10%, 3 ph., 30 amp circuit	86"	56"	2450 lb.



### HD1400 HEAVY DUTY TIRE CHANGER

- Semi-automatic tire changer
- Capable of handling tire widths of up to 58" and a maximum wheel weight of 4189 lb.
- Electric-hydraulic operation
- Features the START & STOP function, guaranteeing notable energy savings while the machine is not being used

### MONSTERAGTT HEAVY DUTY TIRE CHANGER

- Significant reduction in strain
- High protection of rims and tires
- High performance
- Maximum safety
- Reliable universal application

### HD1800 HEAVY DUTY TIRE CHANGER

- Works on mining, forestry and agricultural wheels and tires up to 118" and 6,600 lb.
- Cordless remote control
- Automatic tool head



#### CORGI TIRE CHANGER SPECIFICATIONS

Ascot No.	Mfg. No.	Power Supply	Max Tire Outside	Max Rim Width	Gross Shipping Weight
443-00409	HD1400	208 vac +/-10%, 3 ph., 30 amp circuit	98.5"	58"	2960 lb.
443-04002	HD1800	208 vac +/-10%, 3 ph., 30 amp circuit	118"	50"	5350 lb.
443-01504	MonsterAGTT	208 vac +/-10%, 3 ph., 30 amp circuit	98"	58"	3500 lb.



## CEMB

### WHEEL BALANCERS



#### C212 MOTORIZED DIGITAL TRUCK WHEEL BALANCER WITH PNEUMATIC LIFT

• C212 balances steel & light alloy wheels of cars, light & heavy commercial trucks and bus thanks to a 40mm shaft and a large assortment of adaptors and cones standard • Pneumatic stationary brake useful during wheel mounting and counterweight application • Pedal operated pneumatic lift (soft type) enables excellent centering accuracy of the wheel on the shaft • Automatic Distance & Diameter Entry (2D) • Fully Automatic Cycle with Breaking • 51" wheel guard • Self-Diagnosis and Self-Calibration • **MENUS FOR QUICK SELECTION OF THE FOLLOWING:** Inches to millimeters, unbalanced thresholds 0.1 or 0.25 ounces (1 or 5g) • Direct selection ounces/grams • Optimization program for compensation of rim and tire unbalance • "Static" program—plus 4 ALU programs for PAX, light alloy or special shaped rims • One Button Split & Hidden Weight Program • Direct weight location program (no repositioning of stick-on weights)

PNEUMATIC  
STATIONARY  
BRAKE

FULLY  
AUTOMATIC  
CYCLE



Ascot No.	Mfg. No.	Description
481-00212	C212	Motorized Digital Truck Wheel Balancer with Pneumatic Lift

#### C206 MOBILE HAND SPIN TRUCK WHEEL BALANCER

• **Mobile Hand Spin Truck Wheel Balancer for cars and light & commercial trucks** • C206 balances HD truck and bus tires as well as light truck and car tires • Portable for mobile service when 12VDC available • Automatic Distance & Diameter Entry (2D) • Standard lightweight battery pack for use when power not available • Self-Diagnosis and Self-Calibration • **MENUS FOR QUICK SELECTION OF THE FOLLOWING:** Inches to millimeters, unbalanced thresholds 0.1 or 0.25 ounces (1 or 5g) • Direct selection ounces/grams • Optimization program for compensation of rim and tire unbalance • "Static" program—plus 4 ALU programs for PAX, light alloy or special shaped rims • One Button Split & Hidden Weight Program • Direct weight location program (no repositioning of stick-on weights)

PORTABLE  
FOR MOBILE  
SERVICE

Ascot No.	Mfg. No.	Description
481-00206	C206	Mobile Hand Spin Truck Wheel Balancer



#### ET66 MOTOR DRIVEN BALANCER

• **Precise motor-driven balancer designed for heavy duty wheels and can also accommodate passenger wheels** • Compact, easy to use and reliable • LED display provides ease of use, manual data entry and comes with dynamic, static, and alum programs • Low balancing speed reduces spin times • User-friendly keyboard

HEAVY  
DUTY

COMPACT  
& EASY  
TO USE



Ascot No.	Mfg. No.	Power Supply	Max Tire Outside	Gross Shipping Weight
443-90201	ET66	110V/1ph/60hz	52"	485 lb.

www.ascotsupply.com

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

#### PORTA TRUER

- Fast Accurate and dependable
- Designed to roll up to any vehicle and true the tire without removing the wheel

Ascot No.	Mfg. No.	Description
456-00405	405W	Porta Truer



#### CLHM-140 AND CLHM-190: HEAVY DUTY MOBILE COLUMN LIFTS

- **Challenger's heavy-duty mobile lifting system are robust, yet easily maneuverable and can be operated on almost any solid surface, indoors or out**
- Our heavy-duty mobile lifts are also capable of lifting vehicles of any axle length or wheelbase
- Mobile lifts provide the flexibility and convenience to lift any rubber-tired vehicle, from small passenger cars to large 2-, 3- or 4-axle vehicles up to 152,000 pounds
- *Models are available in 14,000 lb. or 19,000 lb. capacity columns*



The CHLM locks.



The CHLM lifting system is conveniently wireless for a clutter-free work area.

MOBILE  
LIFT

ROBUST  
& HEAVY  
DUTY

Ascot No.	Mfg. No.	Description
308-00140	CHLM 140-4	14,000 lb. Capacity Mobile Column Lift
308-00190	CHLM 190-4	19,000 lb. Capacity Mobile Column Lift



**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com


## TRUCK WHEEL WEIGHTS



### "LT1" SERIES - WHEEL WEIGHTS

- For light trucks, 3/4 & 1 ton vehicles with either tube or tubeless rims where such rims are too thick for "P" series weights • For use on heavier trucks with thin rim flanges • Use "P" series weights on 1/2 ton vehicles • Use rim gauge RG2 to verify correct application

NOTE: LT1 = BTS



489-05020



Ascot No.	Mfg. No.	Weight
"LT1" SERIES		
489-05005	LT1 50	0.5 Oz.
489-05010	LT1 100	1.0 Oz.
489-05015	LT1 150	1.5 Oz.
489-05020	LT1 200	2.0 Oz.
489-05025	LT1 250	2.5 Oz.
489-05030	LT1 300	3.0 Oz.
489-05035	LT1 350	3.5 Oz.
489-05040	LT1 400	4.0 Oz.
489-05045	LT1 450	4.5 Oz.
489-05050	LT1 500	5.0 Oz.
489-05060	LT1 600	6.0 Oz.

QUANTITY: 25 per box

### "RC" SERIES - WHEEL WEIGHTS

- Used on heavy duty trucks with Firestone or Accuride, Radial Commander rims
- Can be used with new strip steel rims with curved edges • Use rim gauge RG2 to verify correct application

NOTE: RC = BTRC



489-09040



Ascot No.	Mfg. No.	Weight
"RC" SERIES		
489-09020	RC 020	2.0 Oz.
489-09030	RC 030	3.0 Oz.
489-09040	RC 040	4.0 Oz.
489-09060	RC 060	6.0 Oz.
489-09080	RC 080	8.0 Oz.
489-09100	RC 100	10.0 Oz.
489-09120	RC 120	12.0 Oz.

QUANTITY: 25 pieces per box except 10 and 12 Oz. are 20 per box

### "CT" SERIES - WHEEL WEIGHTS

- Used on heavy duty trucks with Firestone or Accuride, Budd or Goodyear tubeless rims (except steel rims with curved edges) • Primarily used on rim widths of 6.75", 7.50" and 8.25"

NOTE: CT = BTLT



489-02060



Ascot No.	Mfg. No.	Weight
"CT" SERIES		
489-02020	CT 200	2.0 Oz.
489-02030	CT 300	3.0 Oz.
489-02040	CT 400	4.0 Oz.
489-02060	CT 600	6.0 Oz.
489-02080	CT 800	8.0 Oz.
489-02100	CT 1000	10.0 Oz.
489-02120	CT 1200	12.0 Oz.
489-02140	CT 1400	14.0 Oz.
489-02160	CT 1600	16.0 Oz.

QUANTITY: 25 per box

### "TS" SERIES - WHEEL WEIGHTS FOR LIGHT TRUCK ALLOY WHEELS

- All 1997 and newer Ford trucks with alloy and steel wheels use the "TS" series wheel weight • For use on many domestic trucks with decorative steel wheels, Ford truck new alloy wheels
- Weights fit new domestic full size trucks equipped with wheels using thicker flanges and chrome or powder coatings • Weights larger and use different clip configurations

NOTE: TS = TN = TTC



489-08100

#### APPLICATIONS - TS SERIES

CHEVROLET: Full Size Pick Up, Suburban, Yukon, Tahoe from 2000; FORD: Expedition from 1997, F-100, F-150 from 1997; LINCOLN: Lincoln Navigator with alloy & steel wheels from 1998

Ascot No.	Mfg. No.	Weight
"TS" SERIES		
489-08025	TS 25	0.25 Oz.
489-08050	TS 50	0.50 Oz.
489-08075	TS 75	0.75 Oz.
489-08100	TS 100	1.00 Oz.
489-08125	TS 125	1.25 Oz.
489-08150	TS 150	1.50 Oz.
489-08175	TS 175	1.75 Oz.
489-08200	TS 200	2.0 Oz.
489-08225	TS 225	2.25 Oz.
489-08250	TS 250	2.50 Oz.
489-08275	TS 275	2.75 Oz.
489-08300	TS 300	3.0 Oz.
489-08325	TS 325	3.25 Oz.
489-08350	TS 350	3.50 Oz.
489-08375	TS 375	3.75 Oz.
489-08400	TS 400	4.0 Oz.
489-08425	TS 425	4.25 Oz.
489-08450	TS 450	4.50 Oz.
489-08475	TS 475	4.75 Oz.
489-08500	TS 500	5.0 Oz.

QUANTITY: 25 per box

### "17" SERIES - WHEEL WEIGHTS

- Most popular weight for the medium duty truck • Used on most trucks with tube type tires

NOTE: 17 = BTLM + E



489-55040



Ascot No.	Mfg. No.	Weight
"17" SERIES		
489-55010	17100	1.0 Oz.
489-55020	17200	2.0 Oz.
489-55030	17300	3.0 Oz.
489-55040	17400	4.0 Oz.
489-55050	17500	5.0 Oz.
489-55060	17600	6.0 Oz.
489-55080	17800	8.0 Oz.
489-55100	171000	10.0 Oz.
489-55120	171200	12.0 Oz.
489-55140	171400	14.0 Oz.
489-55160	171600	16.0 Oz.

QUANTITY: 25 pieces per box except 10 &amp; 12 Oz.; 20/box &amp; 14 &amp; 16 Oz.; 10/box

### "TAL" SERIES - WHEEL PROTECTORS' WEIGHTS

- Special weight for all Alcoa and Accuride (from 1983) aluminum tubeless heavy truck wheels; fits both sides of the wheel • Replace the "OS-TAL" and "DS-TAL" series • Use rim gauge RG2 to verify correct application (either OS-TAL or DS-TAL slot) • Recommend coated weights on all vehicles having alloy wheels

NOTE: TAL = BTCAL



489-10030

Ascot No.	Mfg. No.	Weight
"TAL" SERIES		
489-10020	TALS-2.00	2.0 Oz.
489-10030	TALS-3.00	3.0 Oz.
489-10040	TALS-4.00	4.0 Oz.
489-10060	TALS-6.00	6.0 Oz.
489-10080	TALS-8.00	8.0 Oz.

QUANTITY: 25 per box

### CTZ TYPE

- Used on heavy duty trucks with Firestone or Accuride, Budd or Goodyear tubeless rims (except steel rims with curved edges) • Primarily used on rim widths of 6.75", 7.50" and 8.25"

NOTE: CT = BTLT



Ascot No.	Plombco CTZ Series No.	Weight
CT: ZINC		
489-24200	CTZ-2.00	2.0 Oz.
489-24300	CTZ-3.00	3.0 Oz.
489-24400	CTZ-4.00	4.0 Oz.
489-24500	CTZ-5.00	5.0 Oz.
489-24600	CTZ-6.00	6.0 Oz.

QUANTITY: 25 per box



Plombco

### I7Z TYPE

- Most popular weight for the medium duty truck • Used on most trucks with tube type tires

NOTE: 17 = BTLM + E



Plombco



HPW

Ascot No.	Plombco I-7Z Series No.	HPW I7Z Series No.	Wgt.
I7: ZINC			
489-22100	I7Z-1.00	I7Z-010	1.0 Oz.
489-22150	-	I7Z-015	1.5 Oz.
489-22200	I7Z-2.00	I7Z-020	2.0 Oz.
489-22250	-	I7Z-025	2.5 Oz.
489-22300	I7Z-3.00	I7Z-030	3.0 Oz.
489-22350	-	I7Z-035	3.5 Oz.
489-22400	I7Z-4.00	I7Z-040	4.0 Oz.
489-22500	I7Z-5.00	I7Z-050	5.0 Oz.
489-22600	I7Z-6.00	-	6.0 Oz.
484-22800	I7Z-8.00	-	8.0 Oz.

QUANTITY: 25 per box except 10 &amp; 12 Oz.; 20/box &amp; 14 &amp; 16 Oz.; 10/box



## TRUCK WHEEL WEIGHTS



### LT1Z TYPE

• For light trucks, 3/4 & 1 ton vehicles with either tube or tubeless rims where such rims are too thick for "P" series weights • For use on heavier trucks with thin rim flanges • Use "P" series weights on 1/2 ton vehicles • Use rim gauge RG2 to verify correct application  
NOTE: LT1 = BTS

Ascot No.	Plombco LT1Z Series No.	HPW LT1Z Series No.	Wgt.
<b>LT1: ZINC</b>			
489-21050	LT1Z-0.50	LT1Z-005	.5 Oz.
489-21100	LT1Z-1.00	LT1Z-010	1.0 Oz.
489-21150	LT1Z-1.50	LT1Z-015	1.5 Oz.
489-21200	LT1Z-2.00	LT1Z-020	2.0 Oz.
489-21250	LT1Z-2.50	LT1Z-025	2.5 Oz.
489-21300	LT1Z-3.00	LT1Z-030	3.0 Oz.
489-21350	LT1Z-3.50	LT1Z-035	3.5 Oz.
489-21400	LT1Z-4.00	LT1Z-040	4.0 Oz.
489-21450	-	LT1Z-045	4.5 Oz.
489-21500	-	LT1Z-050	5.0 Oz.

QUANTITY: 25 per box



### TALZ TYPE

• Special weight for all Alcoa and Accuride (from 1983) aluminum tubeless heavy truck wheels; fits both sides of the wheel • Replace the "OS-TAL" and "DS-TAL" series • Use rim gauge RG2 to verify correct application (either OS-TAL or DS-TAL slot) • Recommend coated weights on all vehicles having alloy wheels  
NOTE: TALZ = BTCL

Ascot No.	Plombco TALZ-S Series No.	HPW TALZ Series No.	Wgt.
<b>TAL: ZINC</b>			
489-23100	-	TALZ-010	1.0 Oz.
489-23200	TALZS-2.00	TALZ-020	2.0 Oz.
489-23300	TALZS-3.00	TALZ-030	3.0 Oz.
489-23400	TALZS-4.00	TALZ-040	4.0 Oz.
489-23500	TALZS-5.00	TALZ-050	5.0 Oz.
489-23600	TALZS-6.00	TALZ-060	6.0 Oz.

QUANTITY: 25 per box



### RCZ TYPE

• Used on heavy duty trucks with Firestone or Accuride, Radial Commander rims • Can be used with new strip steel rims with curved edges • Use rim gauge RG2 to verify correct application

Ascot No.	Plombco RCZ Series No.	Weight
<b>RC: ZINC</b>		
489-64804	RCZ-2.00	2.00 Oz.
489-64806	RCZ-3.00	3.00 Oz.
489-64808	RCZ-4.00	4.00 Oz.
489-64810	RCZ-5.00	5.00 Oz.
489-64812	RCZ-6.00	6.00 Oz.

QUANTITY: 25 per box




Truck wheel weights in use.

## ADHESIVE WHEEL WEIGHTS



### PLOMBCO LEAD ADHESIVE: RUBBER TAPE



Ascot No.	MFG. No.	Tape Type	Description
<b>PLOMBCO LEAD ADHESIVE: RUBBER TAPE</b>			
484-31230	312-30	Rubber Tape	30 - 6" Bars - 1/4 Oz. Segments - 3/4" Wide
484-31252	312-52	Rubber Tape	52 - 6" Bars - 1/4 Oz. Segments - 3/4" Wide
484-31430	314-30	Rubber Tape	30 - 6" Bars - 1/4 Oz. Segments - 1/2" Wide
484-41215	412-15	Rubber Tape	15 - 6" Bars - 1/2 Oz. Segments - 3/4" Wide
484-41230	412-30	Rubber Tape	30 - 6" Bars - 1/2 Oz. Segments - 3/4" Wide
484-51215	512-15	Rubber Tape	15 - 6" Bars - 1 Oz. Segments - 3/4" Wide
484-61215	612-15	Rubber Tape	15 - 6" Bars - 2 Oz. Segments - 1-1/4" Wide



### PLOMBCO LEAD ADHESIVE: COLD WEATHER TAPE

• Save time and money by eliminating the need to heat the wheel when temperatures are below 40 degrees Fahrenheit

Ascot No.	MFG. No.	Tape Type	Description
<b>PLOMBCO LEAD ADHESIVE: COLD WEATHER TAPE</b>			
484-31231	312-30BCW	Cold Weather	30 - 6" Bars - 1/4 Oz. Segments - 3/4" Wide, Black
484-31233	312-30CW	Cold Weather	30 - 6" Bars - 1/4 Oz. Segments - 3/4" Wide
484-31432	314-30CW	Cold Weather	30 - 6" Bars - 1/4 Oz. Segments - 1/2" Wide
484-33252	312-52CW	Cold Weather	52 - 6" Bars - 1/4 Oz. Segments - 3/4" Wide
484-41232	412-30CW	Cold Weather	30 - 6" Bars - 1/2 Oz. Segments - 3/4" Wide
484-53215	512-15CW	Cold Weather	15 - 6" Bars - 1 Oz. Segments - 3/4" Wide
484-63215	612-15CW	Cold Weather	15 - 6" Bars - 2 Oz. Segments - 1-1/4" Wide

### PERFECT QUIKSTIK™ SEGMENTED ADHESIVE STYLE LEAD WHEEL WEIGHTS

• Only pre-cut pre-taped weight • No cutting, no pre-contouring and no waste • Each segment is stamped with the actual weight in ounces and grams • Available in 1/2", 3/4" low profile and 3/4" truck weight design • Wheel weight for racing/off road performance applications



Ascot No.	MFG. No.	Weight	Description
<b>PERFECT LEAD ADHESIVE</b>			
484-11360	100360	3 Oz.	Pre-Taped Weight 30 Strips of .25 Oz. Segments
484-10720	100720	3 Oz.	Pre-Taped Weight 60 Strips of .25 Oz. Segments
484-00012	2006245	3 Oz.	Pre-Taped Weight 48 Strips of .25 Oz. Segments
484-13360	200624	3 Oz.	Pre-Taped Weight 52 Strips of .25 Oz. Segments
484-30360	300360	6 Oz.	Pre-Taped Truck Weight 30 Strips of 1 Oz. Segments
484-00006	CL6	6 Oz.	Pre-Taped Truck Weight 30 Strips of 1 Oz. Segments
484-00112	CL12	12 Oz.	Pre-Taped Truck Weight 8 Strips of 2 Oz. Segments

All items on this page feature the patented QuikTAB™

## ADHESIVE WHEEL WEIGHTS



### STEEL SEGMENTED ADHESIVE-STYLE WHEEL WEIGHTS

• **Pre-cut weights** • No cutting, no pre-contouring and no waste • Each segment is stamped with the actual weight in ounces • US white "quick" tape



484-16001



484-17026



484-17127



484-27026



484-37026

Ascot No.	MFG. No.	Description
484-16001	1184	1 Oz. Steel Adhesive Wheel Weights: 1 Oz. Strips, 4 Segments (18 Strips per Box)
484-17026	14308	1/4 Oz. Steel Adhesive Wheel Weights with Plastic Powder Coating: 1/4 Oz. Strips, 8 Segments (30 Strips per Box)
484-17127	12187	1/2 Oz. Steel Adhesive Wheel Weights: 1/2 Oz. Strips, 7 Segments (18 Strips per Box)
484-27026	14308W	1/4 Oz. White Steel Adhesive Wheel Weights with White Powder Coating: 1/4 Oz. Strips, 8 Segments (30 Strips per Box)
484-37026	14308B	1/4 Oz. Black Steel Adhesive Wheel Weights with Black Powder Coating: 1/4 Oz. Strips, 8 Segments (30 Strips per Box)

#### STEEL SEGMENTED ADHESIVE-STYLE WHEEL WEIGHTS

484-16001	1184	1 Oz. Steel Adhesive Wheel Weights: 1 Oz. Strips, 4 Segments (18 Strips per Box)
484-17026	14308	1/4 Oz. Steel Adhesive Wheel Weights with Plastic Powder Coating: 1/4 Oz. Strips, 8 Segments (30 Strips per Box)
484-17127	12187	1/2 Oz. Steel Adhesive Wheel Weights: 1/2 Oz. Strips, 7 Segments (18 Strips per Box)
484-27026	14308W	1/4 Oz. White Steel Adhesive Wheel Weights with White Powder Coating: 1/4 Oz. Strips, 8 Segments (30 Strips per Box)
484-37026	14308B	1/4 Oz. Black Steel Adhesive Wheel Weights with Black Powder Coating: 1/4 Oz. Strips, 8 Segments (30 Strips per Box)

### PERFECT QUIKSTIK™ SEGMENTED ADHESIVE-STYLE STEEL WHEEL WEIGHTS

• **Only pre-cut, pre-taped weight** • No cutting, no pre-contouring and no waste • Each segment is stamped with the actual weight in ounces and grams



484-00300



484-20576



484-30336

Ascot No.	MFG. No.	Description
484-00300	SST300N	Pre-Taped Steel Weight - 3 Oz. Segments
484-00600	SSGO60N	Pre-Taped Steel Weight - 60 Gram Segments
484-20624	200624ST	Pre-Taped Steel Weight - 3 Oz. Segments
484-20576	200576FE	Pre-Taped Steel Weight - 3 Oz. Segments (No QuikTAB™ feature.)
484-22576	200576FEBLK	Pre-Taped Black Steel Weight - 3 Oz. Segments (No QuikTAB Feature)
484-30336	300336FE	Pre-Taped Steel Weight - 6 Oz. Segments
484-31360	300360ST	Pre-Taped Steel Weight - 6 Oz. Segments

#### PERFECT QUIKSTIK™ SEGMENTED ADHESIVE-STYLE STEEL WHEEL WEIGHTS

484-00300	SST300N	Pre-Taped Steel Weight - 3 Oz. Segments
484-00600	SSGO60N	Pre-Taped Steel Weight - 60 Gram Segments
484-20624	200624ST	Pre-Taped Steel Weight - 3 Oz. Segments
484-20576	200576FE	Pre-Taped Steel Weight - 3 Oz. Segments (No QuikTAB™ feature.)
484-22576	200576FEBLK	Pre-Taped Black Steel Weight - 3 Oz. Segments (No QuikTAB Feature)
484-30336	300336FE	Pre-Taped Steel Weight - 6 Oz. Segments
484-31360	300360ST	Pre-Taped Steel Weight - 6 Oz. Segments

### PLOMBCO STEEL ADHESIVE WHEEL WEIGHTS

**ALL STEEL**

Ascot No.	Mfg. No.	Tape Type	Description
<b>PLOMBCO STEEL ADHESIVE WHEEL WEIGHTS</b>			
484-32230	312Fe-30CW	Cold Weather	30" x 6" Bars Precut in .25 Oz. Segments of .75" Wide
484-32252	312Fe-52CW	Cold Weather	52" x 6" Bars Precut in .25 Oz. Segments of .75" Wide
484-41226	412Fe	OE Adhesive	6", Bars Precut in .5 Oz. Segments of .75" Wide
484-30836	308Fe-36	Rubber Base	2 Oz. strips (1/4 Oz.) (36 Strips per Box)
484-28408	408FE-28	Rubber Base	Steel Adhesive Wheel Weight: 4 Oz. (28 Strips per Box)
484-28418	VL408FES-28	Rubber Base	Value Line Steel Adhesive Wheel Weight: 4 Oz. (28 Strips per Box)
484-28428	VL408FEB-28	Rubber Base	Value Line Black Steel Adhesive Wheel Weight: 4 Oz. (28 Strips per Box)
484-31234	312Fe-30	Rubber Base	Steel Adhesive Wheel Weight: 3 Oz. (30 Strips per Box)
484-31500	VL315FEB	Rubber Base	Value Line Black Steel Adhesive Wheel Weight Roll: 15 lb., 1/4 Oz. Segments
484-31501	VL315FES	Rubber Base	Value Line Steel Adhesive Wheel Weight Roll: 15 lb., 1/4 Oz. Segments
484-35320	320Fe	Rubber Base	Steel Adhesive Wheel Weight Roll: 20 lb., .25 Oz. Segments
484-40848	408Fe-48	Rubber Base	408Fe-48 Steel Adhesive Wheel Weight: 4 Oz. (48 Strips/Box)
484-41500	VL415FEB	Rubber Base	Value Line Black Steel Adhesive Wheel Weight Roll: 15 lb., 1/2 Oz. Segments
484-41501	VL415FES	Rubber Base	Value Line Steel Adhesive Wheel Weight Roll: 15 lb., 1/2 Oz. Segments
484-42010	420Fe	Rubber Base	Steel Adhesive Wheel Weight Roll: 20 lb., .50 Oz. Segments
484-48312	VL312FES-48	Rubber Base	Value Line Steel Adhesive Wheel Weight: 3 Oz. (48 Strips per Box)
484-48322	VL312FEB-48	Rubber Base	Value Line Black Steel Adhesive Wheel Weight: 3 Oz. (48 Strips per Box)
484-50615	506Fe-15	Rubber Base	Steel Adhesive Wheel Weight: 6 Oz. (15 Strips per Box)
484-52001	520Fe	Rubber Base	Steel Adhesive Wheel Weight Roll: 20 lb., 1 Oz. Segments
484-52312	312FE-52	Rubber Base	Steel Adhesive Wheel Weight: 3 Oz. (52 Strips per Box)




Enjoy the benefits and comfort of balancing your wheels by using adhesive wheel weights. The use of these products reduces maintenance costs and prolongs the life of your tires.



484-28408



484-28418



484-28428



484-31234



484-41226



484-48312



484-48322



484-50615



## ADHESIVE WHEEL WEIGHTS



### BLACK STEEL ADHESIVE WHEEL WEIGHTS

STEEL



484-10101



484-10201



484-10301

Ascot No.	Mfg. No.	Description
<b>BLACK STEEL ADHESIVE WHEEL WEIGHTS</b>		
484-10101	FSF101B	1/4 Oz. Black Steel Adhesive Wheel Weight: 3 Oz. (48 Strips per Box)
484-10201	FSF102B	1/2 Oz. Black Steel Adhesive Wheel Weight: 3 Oz. (48 Strips per Box)
484-10301	FSF103B	1 Oz. Black Steel Adhesive Wheel Weight: 4 Oz. (36 Strips per Box)
484-67026	24308B	1/2 Oz. Black Steel Adhesive Strip (18 Strips per Box)
484-77026	34308B	1 Oz. Black Steel Adhesive Strip (18 Strips per Box)

### HPW & PERFECT STEEL ADHESIVE WHEEL WEIGHT ROLLS

STEEL

- Familiar design: Features all of the same standard steel QuikStik characteristics
- Only use the amount of weight you need each time you balance
- Simply pull and rip
- No cutting and no measuring
- **MADE IN THE USA**

NO CUTTING,  
NO WASTE

PRE-CUT  
WEIGHTS



484-21576



484-32360

Patented  
QuikTAB™  
feature.

Ascot No.	Mfg. No.	Description
<b>PERFECT STEEL ROLLS</b>		
484-03200	SST32000N	25 Oz. (1280 Segments)
484-07500	SSG7500N	5G (1500 Segments)
484-21576	200576FER	0.25 Oz. (704 Segments)
484-21624	200624STR	25 Oz. (1280 Segments)
484-32360	300360STR	.5 Oz. (640 Segments)



Please contact us for further details regarding WHEEL WEIGHTS.

STEEL

### PLOMBCO STEEL ROLLS

RUBBER  
BASE TAPE



484-42010

Ascot No.	Mfg. No.	Tape Type	Description
<b>PLOMBCO STEEL ROLLS</b>			
484-35320	320Fe	Rubber Base Tape	20 lb. Roll - 1272 Segments (1/4 Oz.)
484-42010	420Fe	Rubber Base Tape	20 lb. Roll - 640 Segments (1/2 Oz.)
484-52001	520Fe	Rubber Base Tape	20 lb. Roll - 320 Segments (1 Oz.)

### ADHESIVE WHEEL WEIGHT ROLLS

STEEL  
ZINC

- Simply use the amount of weight you need each time you balance
- Convenient pull and rip design
- No cutting and no measuring
- Rolled weights are more efficient and help reduce waste
- Plastic coated
- US white "quick" tape



484-47026

Ascot No.	Mfg. No.	Description
<b>ADHESIVE WHEEL WEIGHT ROLLS</b>		
484-47026	145KG	5 kg Steel Adhesive Wheel Weight Roll: 1/4 Oz. Segments (700 Segments per Roll)
484-57026	245KG	5 kg Zinc Adhesive Wheel Weight Roll: 5G Segments (1000 Segments per Roll)

Eliminate  
wasted tape  
by using  
rolls!



484-51501  
Gray Steel Adhesive  
Roll: 1/4 oz. Segments

484-61500  
Black Steel Adhesive  
Roll: 1/2 oz. Segments

### ADHESIVE WHEEL WEIGHT ROLLS

- Oversized white paper tape
- Easy to peel
- Easy to tear by hand
- Available in grey steel or black steel
- 3 rolls per case

Ascot No.	Mfg. No.	Description
484-51500	AVL315FeB	Black Steel Adhesive Roll: 1/4 oz. Segments (960/roll)
484-51501	AVL315FeS	Grey Steel Adhesive Roll: 1/4 oz. Segments (960/roll)
484-61500	AVL414FeB	Black Steel Adhesive Roll: 1/2 oz. Segments (480/roll)
484-61501	AVL415FeS	Grey Steel Adhesive Roll: 1/2 oz. Segments (480/roll)
484-51502	AVL315FeB-CW	Black Steel Adhesive Roll: 1/4 oz. Segments (960/roll) <b>Cold Weather</b>
484-51503	AVL315FeS-CW	Grey Steel Adhesive Roll: 1/4 oz. Segments (960/roll) <b>Cold Weather</b>
484-61502	AVL415FeB-CW	Black Steel Adhesive Roll: 1/2 oz. Segments (480/roll) <b>Cold Weather</b>
484-61503	AVL415FeS-CW	Grey Steel Adhesive Roll: 1/2 oz. Segments (480/roll) <b>Cold Weather</b>



## WHEEL WEIGHT DISPLAYS



### METAL WHEEL WEIGHT RACK

- All-metal construction • 8 shelves • Includes dividers • 64 weight locations • Square tube to support the rack



486-31280

Ascot No.	Mfg. No.	Description
486-31280	MFR	Metal Wheel Weight Rack

### ADHESIVE WHEEL WEIGHT ROLL STANDS

- All-metal construction • Accommodates three rolls • Floor mount • Easy to assemble



486-31282

486-31281

Ascot No.	Mfg. No.	Description
486-31281	WWR-3	Adhesive Wheel Weight Roll Stand (3)
486-31282	WWR-4	Adhesive Wheel Weight Roll Stand (4) *For Smaller Rolls

## WHEEL WEIGHT TOOLS



### PREMIUM HEAVY DUTY PROFESSIONAL WHEEL WEIGHT HAMMER

- Heavy duty construction • Black coated handles with red highlight
- Designed for use on coated wheel weights • Will not mark alloy wheels • Replaceable plastic head available • Made in Taiwan

Ascot No.	Mfg. No.	Description
486-33580	3358	Premium Heavy Duty Wheel Weight Hammer - Red
486-33581	3358-B	Premium Heavy Duty Professional Wheel Weight Hammer - Black
486-33584	335804	Replacement Head

### HEAVY DUTY ADHESIVE WHEEL WEIGHT REMOVAL TOOL

- Light weight and easy to use • Easy and quick to remove stick-on wheel weights without damaging rims • The plastic cover of the jaws can protect the alloy rims from damaging or scratching • Adjustable jaws for different types and sizes of wheel weights • Replacement plastic tips available separately

Ascot No.	Mfg. No.	Description
486-00044	P4	Heavy Duty Adhesive Wheel Weight Removal Tool
486-00144	P4R	Replacement Tips for P4 (2-Pack)

### PREMIUM FIBERGLASS WHEEL WEIGHT HAMMER

- Used to easily install and remove all types of steel and zinc clip-on wheel weights • Standard with large replaceable hook for prying • Fiberglass shaft for added durability • The hook is made from cold rolled steel • The striking face has a non-marring, surface protective medium-hard replaceable tip • Slip-resistant, ergonomic grip reduces arm strain & fatigue • MADE IN THE USA

Ascot No.	Mfg. No.	Description
486-11000	P110	Premium Fiberglass Wheel Weight Hammer
486-11002	P110-2	Replacement Small Hook for Premium Wheel Weight Hammer
486-11004	P110-4	Replacement Tip for Premium Wheel Weight Hammer
486-11005	8884254	Replacement Large End for P-110 Wheel Weight Hammer

### HEAVY DUTY TRUCK WHEEL WEIGHT HAMMER

- Will handle with ease the removal and attachment of HD truck weights
- Fiberglass shaft for a lifetime of use • New chromalloy hooks designed for large wheels and large weights • Larger 1.75" tip for easier application along with heavier total tool weight require less striking effort • Longer handle provides added reach on larger wheels...comfortable, durable rubber handle • Use on all truck wheels
- New industry standard • 12" total length • WEIGHT: 2 lbs. • MADE IN THE USA

Ascot No.	Mfg. No.	Description
486-11011	P110-T	Heavy Duty Truck Wheel Weight Hammer
486-11005	8884254	Replacement Large End for P-110 Wheel Weight Hammer
486-11006	15156	Replacement Tip for Premium Wheel Weight Hammer

### COATED WHEEL WEIGHT HAMMER

- Protects valuable wheels from damage • Features replaceable plastic head

Ascot No.	Mfg. No.	Description
486-00233	P-3B	Soft Head Wheel Weight Hammer
486-00133	P-3H	Replacement Head for P-3B Wheel Weight Hammer



QUALITY  
WHEEL  
WEIGHT  
TOOLS



WHEEL WEIGHT TOOLS



SPECIALTY WHEEL WEIGHT HAMMERS

Ascot No.	Mfg. No.	Description
486-07129	51400	Truck Wheel Weight Hammer
486-51480	51480	Deluxe Wheel Weight Hammer (Made of heat strengthened steel, comfortable vinyl handle grips, nylon durable hammer replaceable tip)

PASSENGER CAR WHEEL WEIGHT HAMMER

• The industry standard for passenger car wheel weight tools • Not for use on alloy or chrome wheels

Ascot No.	Mfg. No.	Description
486-00011	P-1	Economy Chrome Wheel Weight Hammer

EURO STYLE WHEEL WEIGHT HAMMER

• Heavy Commercial Duty Design • Coated Handles for Comfort • Nickel Plated Vanadium

Ascot No.	Mfg. No.	Description
486-00222	P-2C	Euro-Style Wheel Weight Hammer

HEAVY DUTY ADHESIVE WHEEL WEIGHT REMOVERS

• For use with stick-on wheel weights: Removes emblems, body side moldings and stick-on wheel weights • Scrape off stickers without scratching paint or glass and gaskets from aluminum parts • One piece composite construction can be hit with a hammer • Knobbed handle to prevent hand from slipping while removing wheel weights • Made of high impact plastic • Resharpen with a file when needed • Equivalent to ESCO 50146

Ascot No.	Mfg. No.	Description
486-71510	71510	Red Heavy Duty Adhesive Wheel Weight Scraper
486-71511	71511	Black Heavy Duty Adhesive Wheel Weight Scraper

RIM GAUGE

• Convenient and economical gauges that guide you to the correct wheel weight application • Helpful with alloy wheels and thinner high strength steel wheels that have numerous new rim configurations



Ascot No.	Mfg. No.	Description
486-75002	RG2	Rim Gauge For HD Trucks



The only tire and wheel balancing product on the market proven to improve fuel economy in two separate S.A.E. and TMC Type II tests.

Ever wonder what Counteract does inside the tire? Scan the QR code to see Counteract in action.



Featured New Products



5th Wheel Grease

This fifth wheel grease is packaged in convenient, easy-to-apply pouches.

To use, place one pouch on each side of the fifth wheel plate near the base. The pouches rupture when the plate engages the trailer and disintegrates leaving no environmental waste. It is available in a unit of 57-grams.



Six-Way Socket Sets

Available in 1/2", 3/4", and 1" drives

Works in cases of corrosion, rounded lug heads, thin walls for specialty aluminum wheels, etc.

Works on at least 6 different fastener types: Spline, 6-Point, 12-Point, Star, Square, 50% Rounded Off Heads

Impact rated





## BALANCING BEADS



## COUNTERACT BALANCING BEADS

• **Perfect balance - perfect wear** • Clean, trouble free balancing micro-beads provide continuous self-adjusting balance • No clumping  
• Just open the outside package and throw the inside bag into the tire  
• Method allows the use of an air blaster to seat the tire on the rim without contaminating the seating area • Air blaster pressure inside the tire will collapse the bag containing Counteract Balancing Beads or the package will break open and release its contents soon after driving • Available in application sizes from half ton vehicles to heavy trucks • **All packaging is color coded to tire size on application chart**



Ascot No.	Mfg. No.	Description	Qty./Case
451-00013	CBB-IP-LG	Injector Pump for Counteract Balancing Beads	N/A
451-00203	3 Oz. BP	3 Oz. Bag in Bag of Counteract Balancing Beads	96
451-00204	4 Oz. B	4 Oz. Bag in Bag of Counteract Balancing Beads	92
451-00205	5 Oz. B	5 Oz. Bag in Bag of Counteract Balancing Beads	76
451-00206	6 Oz. B	6 Oz. Bag in Bag of Counteract Balancing Beads	64
451-00208	8 Oz. B	8 Oz. Bag in Bag of Counteract Balancing Beads	52
451-00210	10 Oz. B	10 Oz. Bag in Bag of Counteract Balancing Beads	40
451-00212	12 Oz. B	12 Oz. Bag in Bag of Counteract Balancing Beads	36
451-00214	14 Oz. B	14 Oz. Bag in Bag of Counteract Balancing Beads	32
451-00216	16 Oz. B	16 Oz. Bag in Bag of Counteract Balancing Beads	28

## ECO BALANCE BALANCING BEADS

• **Eco friendly complete wheel assembly internal balancing agent**  
• Increase tire life with even tread wear • Lower tire operating temperatures  
• TPMS Compatible • Reduce maintenance with easy installation throw-in-bag • Improve fuel economy by reducing rolling resistance • Easy to use application chart • Remain balanced for the life of the tire



Ascot No.	Mfg. No.	Description	Qty./Case
451-01203	3 Oz. BP-EB	3 Oz. Bag in Bag of Eco Balance Passenger Balancing Beads	96
451-01204	4 Oz. B-EB	4 Oz. Bag in Bag of Eco Balance Beads	92
451-01206	6 Oz. B-EB	6 Oz. Bag in Bag of Eco Balance Beads	64
451-01208	8 Oz. B-EB	8 Oz. Bag in Bag of Eco Balance Beads	52
451-01210	10 Oz. B-EB	10 Oz. Bag in Bag of Eco Balance Beads	40
451-01212	12 Oz. B-EB	12 Oz. Bag in Bag of Eco Balance Beads	36
451-01214	14 Oz. B-EB	14 Oz. Bag in Bag of Eco Balance Beads	32
451-01216	16 Oz. B-EB	16 Oz. Bag in Bag of Eco Balance Beads	28

[www.ascotsupply.com](http://www.ascotsupply.com)

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

## BALANCING BEADS



## MAGNUM+ BALANCING COMPOUND

• An advanced technology dry tire balancing compound, with superior tire balancing properties • Formulated from specially-processed multiple-density materials  
• Provides continuous and lasting tire balancing for standard, low-profile and wide-base medium truck tires and heavy duty light truck tires • No more time-consuming and expensive mechanical balancing, perfect self-adjusting balance in all your tires, less vehicle wear and tear, easier maintenance and less driver fatigue



451-00200



Ascot No.	Mfg. No.	Sample Tire Size	Qty./Case
451-00150	LTP150	LT215/75/R15	36
451-00200	LTP200	LT235/85R16	24
451-00250	MTP250	33x12.5OR15	24
451-00300	MTP300	245/75R22.5	18
451-00400	MTP400	11R22.5/11R24.5	12
451-00500	MTP500	12R24.5	12
451-06000	DPP600	365/80R22.5	6
451-07000	DPP700	425/65R22.5	6

## MAGNUM+ FLEET TUBS

• Each tub is labeled and packaged for a specific premeasured insert bag • Bulk discounts apply to each tub size • Tubs are durable and reusable with a resealable lid • Complete with a full color label, tubs look great in retail settings and on delivery trucks  
• Eliminates wasted extra packaging and tubs are recyclable



MAGNUM+ microbeads distribute themselves evenly inside the tire due to the centrifugal force. A special antistatic coating preserves the mobility of the microbeads for a long time.



451-72305

Ascot No.	Range	Nom. wt.	Description	Qty./Case
451-10003	LFPI00 INSERT™	3 Oz.	MAGNUM+ Fleet Tub - Contains 24 LTP100	24
451-15405	LFPI50 INSERT™	4-1/2 Oz.	MAGNUM+ Fleet Tub - Contains 24 LTP150	24
451-20605	LFP200 INSERT™	6-1/2 Oz.	MAGNUM+ Fleet Tub - Contains 24 LTP200	24
451-25805	MFP250 INSERT™	8-1/2 Oz.	MAGNUM+ Fleet Tub - Contains 22 MTP250	22
451-31005	MFP300 INSERT™	10-1/2 Oz.	MAGNUM+ Fleet Tub - Contains 18 MTP300	18
451-40013	MFP400 INSERT™	13 Oz.	MAGNUM+ Fleet Tub - Contains 14 MTP400	14
451-60021	DPP600 INSERT™	21 Oz.	MAGNUM+ Fleet Tub - Contains 6 DPP600	6
451-72305	DPP700 INSERT™	23-1/2 Oz.	MAGNUM+ Fleet Tub - Contains 6 DPP700	6

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

[www.ascotsupply.com](http://www.ascotsupply.com)





**IMI EQUAL FLEXX is an adaptive, internal wheel-end balancing solution that reduces fuel and tire costs by reducing vibration from the wheel end.** Developed in partnership with the foremost experts in vibration analysis and testing, its soft, dry particles are engineered to continuously balance tires, creating a smoother ride and more even tire wear for the life of the tire. FLEXX will never damage the tire casing, wheel, or TPMS units. It does not void tire manufacturer warranties.



## INSTALLATION INSTRUCTIONS

BEFORE INSTALLING FLEXX, READ THE QUANTITY CHART.

1. Simply drop the FLEXX bag into the tire before mounting. Do not tear or open bag.
2. Mount the tire on the wheel, inflate and adjust the air pressure of the tire.
3. Install filtered valve core and identification sleeve.

**Avoid over lubricating tire bead or installing FLEXX in tires filled with sealant. Contents are non-toxic, environmentally safe, and non-flammable.**



Ascot No.	Mfg. No.	Description
45I-32016	EQFXWC32	EQUAL FLEXX Drop In Bag (32) W pkgs. (16 Oz.)
45I-40004	EQFXEC40	EQUAL FLEXX Drop In Bag (40) E pkgs. (4 Oz.)
45I-40006	EQFXDC40	EQUAL FLEXX Drop In Bag (40) D pkgs. (6 Oz.)
45I-40008	EQFXCC40	EQUAL FLEXX Drop In Bag (40) C pkgs. (8 Oz.)
45I-40010	EQFXBC40	EQUAL FLEXX Drop In Bag (40) B pkgs. (10 Oz.)
45I-40012	EQFXAC40	EQUAL FLEXX Drop In Bag (40) A pkgs. (12 Oz.)
45I-40016	EQFXFC40	EQUAL FLEXX Drop In Bag (40) F pkgs. (3 Oz.)



## GO BEYOND BALANCE



FUEL COST



TIRE WEAR



PRODUCTIVITY



SMOOTHER RIDE

**FLEXX™ is the most scientifically refined internal wheel-end balancer available. It installs in seconds, and keeps fleets running smoothly year after year.**

**2X MORE VIBRATION ABSORPTION POWER**

**UP TO 15% BETTER PERFORMANCE**

**LOWEST ROLLING RESISTANCE, MORE EVEN TIRE WEAR AND THE SMOOTHEST RIDE**

**EASIEST TO USE**



**FLEXX**  
MORE MILES. LESS FUEL

## COMMERCIAL TIRE APPLICATION CHART

\* Shown below is the Commercial Truck Tire Application Chart. The full Application Quantity Chart, which includes Commercial Light Truck Tires and Light Truck Mudders, can be viewed at [www.improducts.com/flexx-quantity-chart](http://www.improducts.com/flexx-quantity-chart).

TIRE SIZE	WHEEL POSITION		
	SINGLE	TRUCK TIRES	
7.50	R18	E-4 Oz.	D-6 Oz.
8.00	R19.5	D-6 Oz.	C-8 Oz.
9.00	R19.5	D-6 Oz.	C-8 Oz.
18.00	R19.5	W-16 Oz.	—
225/70	R19.5	D-6 Oz.	C-8 Oz.
245/70	R19.5	D-6 Oz.	C-8 Oz.
265/70	R19.5	D-6 Oz.	C-8 Oz.
275/70	R19.5	C-8 Oz.	B-10 Oz.
285/70	R19.5	C-8 Oz.	B-10 Oz.
295/70	R19.5	C-8 Oz.	B-10 Oz.
305/70	R19.5	B-10 Oz.	A-12 Oz.
280/75	R19.5	C-8 Oz.	B-10 Oz.
445/65	R19.5	W-16 Oz.	—
525/65	R20.5	B+C=26 Oz.	—
615/65	R20.5	A+A+B=34 Oz.	—
7.50	R20	C-8 Oz.	B-10 Oz.
8.25	R20	C-8 Oz.	B-10 Oz.
9.00	R20	B-10 Oz.	A-12 Oz.
10.0	R20	B-10 Oz.	A-12 Oz.
11.00	R20	A-12 Oz.	B+E=14 Oz.
12.00	R20	A-12 Oz.	B+E=14 Oz.
12.50	R20	A-12 Oz.	B+E=14 Oz.
13/80	R20	A-12 Oz.	B+E=14 Oz.
14/80	R20	B+E=14 Oz.	W-16 Oz.
14.00	R20	W-16 Oz.	—
16.00	R20	B+B=20 Oz.	—
10.00	R22	B-10 Oz.	A-12 Oz.
11.00	R22	A-12 Oz.	B+E=14 Oz.
9.00	R22.5	C-8 Oz.	B-10 Oz.
10.00	R22.5	B-10 Oz.	A-12 Oz.
11.00	R22.5	B-10 Oz.	A-12 Oz.
12.00	R22.5	A-12 Oz.	B+E=14 Oz.
275/50	R22.5	B-10 Oz.	A-12 Oz.
235/70	R22.5	D-6 Oz.	C-8 Oz.
255/70	R22.5	C-8 Oz.	B-10 Oz.
11/70	R22.5	B-10 Oz.	A-12 Oz.
265/70	R22.5	C-8 Oz.	B-10 Oz.
295/60	R22.5	B-10 Oz.	A-12 Oz.
275/70	R22.5	B-10 Oz.	A-12 Oz.

TIRE SIZE	WHEEL POSITION		
	SINGLE	TRUCK TIRES	
305/70	R22.5	B-10 Oz.	A-12 Oz.
365/70	R22.5	B+E=14 Oz.	—
315/70	R22.5	B-10 Oz.	A-12 Oz.
245/75	R22.5	C-8 Oz.	B-10 Oz.
265/75	R22.5	C-8 Oz.	B-10 Oz.
285/75	R22.5	B-10 Oz.	A-12 Oz.
295/75	R22.5	B-10 Oz.	A-12 Oz.
315/75	R22.5	A-12 Oz.	B+E=14 Oz.
345/75	R22.5	A-12 Oz.	—
350/75	R22.5	B+E=14 Oz.	—
235/80	R22.5	D-6 Oz.	C-8 Oz.
255/80	R22.5	C-8 Oz.	B-10 Oz.
275/80	R22.5	B-10 Oz.	A-12 Oz.
295/80	R22.5	A-12 Oz.	B+E=14 Oz.
305/85	R22.5	A-12 Oz.	B+E=14 Oz.
315/80	R22.5	A-12 Oz.	B+E=14 Oz.
365/80	R22.5	B+E=14 Oz.	—
445/50	R22.5	W-16 Oz.	—
455/50	R22.5	W-16 Oz.	—
385/65	R22.5	A-12 Oz. hwy	W-16 Oz. flotation
425/65	R22.5	W-16 Oz.	—
435/45	R22.5	B+E=14 Oz.	—
445/55	R22.5	W-16 Oz.	—
445/65	R22.5	W-16 Oz.	—
495/45	R22.5	W-16 Oz.	—
15.00	R22.5	A-12 Oz. hwy	W-16 Oz. flotation
16.50	R22.5	W-16 Oz.	—
18.00	R22.5	W-16 Oz.	—
11.00	24	A-12 Oz.	B+E=14 Oz.
12.00	24	B+E=14 Oz.	—
14.00	24	W-16 Oz.	—
285/75	R24.5	B-10 Oz.	A-12 Oz.
305/75	R24.5	A-12 Oz.	B+E=14 Oz.
315/75	R24.5	A-12 Oz.	B+E=14 Oz.
275/80	R24.5	B-10 Oz.	A-12 Oz.
295/80	R24.5	B-10 Oz.	A-12 Oz.
11.00	R24.5	B-10 Oz.	A-12 Oz.
12.00	R24.5	A-12 Oz.	B+E=14 Oz.



**FLEXX**  
MORE MILES. LESS FUEL

## CAMBER/CASTER TOOLS



## HEAVY DUTY TRUCK ALIGNMENT SHIMS

- 1990 & newer Freightliner single slot adjustment shim • **INCLUDES:** 12 pieces per package

Ascot No.	Mfg. No.	Description
246-43415	43-415	1/32"
246-43416	43-416	1/16"
246-43417	43-417	1/8"



246-43415

## IHC TORQUE ARM ADJUSTMENT SHIMS

- **INCLUDES:** 12 pieces per package

Ascot No.	Mfg. No.	Description
246-43441	43-441	1/32"
246-43442	43-442	1/16"
246-43443	43-443	1/8"



246-43441

## HENDRICKSON ADJUSTABLE WALKING BEAM SHIM KIT

- **INCLUDES:** 2x 5-Piece Kits • Each kit contains 2 of 1/8", 1 of 1/16" & 2 of 1/32"

Ascot No.	Mfg. No.	Description
246-43447	43-447	Hendrickson Adjustable Walking Beam Shim Kit



246-43447

## HEAVY DUTY TRUCK ALIGNMENT SHIMS

- Kenworth air glide 8-bagger adjustment spacers • **INCLUDES:** 6 shims per package

Ascot No.	Mfg. No.	Description
246-43548	43-548	1/32"
246-43549	43-549	1/16"
246-43550	43-550	1/8"
246-43551	43-551	1/4"
246-43552	43-552	1/2"
246-43553	43-553	3/4"
246-43554	43-554	1"



246-43548



## HEAVY DUTY ALIGNMENT



## TRUCK AXLE SHIMS (HEAVY DUTY ZINC ALLOY)

- **Twice the coverage with half the inventory, these truck axle shims fit a variety of 2WD and 4WD vehicles with solid axles from full size Blazers to school buses** • Measure the spring pad, break the shim off at the correct width and insert between the spring and axle • Available in 1/2" changes up to a 4" caster change, either positive or negative • **Packaged six per box** • Any solid axle 2 or 4 wheel drive vehicle

Ascot No.	Mfg. No.	Width	Degree Taper
243-00891	89199	3"-3-1/2"-4"	1/2"
243-00892	89299	3"-3-1/2"-4"	1"
243-00893	89399	3"-3-1/2"-4"	1-1/2"
243-00894	89499	3"-3-1/2"-4"	2"
243-00895	89599	3"-3-1/2"-4"	2-1/2"
243-00896	89699	3"-3-1/2"-4"	3"
243-00897	89799	3"-3-1/2"-4"	3-1/2"
243-00898	89899	3"-3-1/2"-4"	4"



243-00891

## TRUCK AXLE SHIMS (HEAVY DUTY ZINC ALLOY)

- **One part number gives you six shims in a box**

Ascot No.	Mfg. No.	Width	Degree Taper	Box Wt.
243-00841	84199	2-1/4"- 2-1/2"	1/2"	1-1/2 Lbs.
243-00842	84299	2-1/4"- 2-1/2"	1"	1-1/2 Lbs.
243-00843	84399	2-1/4"- 2-1/2"	1-1/2"	2 Lbs.
243-00844	84499	2-1/4"- 2-1/2"	2"	2-1/4 Lbs.
243-00845	84599	2-1/4"- 2-1/2"	2-1/2"	2-3/4 Lbs.
243-00846	84699	2-1/4"- 2-1/2"	3"	2-3/4 Lbs.
243-00847	84799	2-1/4"- 2-1/2"	3-1/2"	3-1/4 Lbs.
243-00848	84899	2-1/4"- 2-1/2"	4"	3-1/4 Lbs.



243-00841

## KENWORTH AIR GLIDE SPACER FOR EIGHT BAGGERS

Ascot No.	Mfg. No.	Thickness	Qty.
241-35001	35001	1/32"	6
241-35002	35002	1/16"	6
241-35003	35003	1/8"	6
241-35004	35004	1/4"	6
241-35005	35005	1/2"	6
241-35006	35006	3/4"	6
241-35007	35007	1"	6



## TANDEM ALIGNMENT SET

- **GREAT STARTER KIT!** • These alignment angle shims are now available in a heavy duty metal box to help you organize all of your shims • Packaged with a large variety of shims and an organization chart inside the lid to make reordering and organization of shims quick and easy



Ascot No.	Mfg. No.	Description	246-36000
246-36000	36000	Tandem Alignment Set	

## TRUCK AXLE SHIMS

- **Packaged six per box**
- Spring pad length and width is needed when placing orders
- **Installation time: .5 hr./side**



Ascot No.	Mfg. No.	Ascot No.	Mfg. No.	Width	Degree	Length
241-04050	10404	241-04051	10405	2-1/2"	1/2"	5"
241-10410	10414	241-10411	10412	2-1/2"	1"	5"
241-10420	10424	241-10421	10422	2-1/2"	1-1/2"	5"
241-10430	10434	241-10431	10432	2-1/2"	2"	5"
241-10440	10444	241-10441	10442	2-1/2"	2-1/2"	5"
241-10450	10454	241-10451	10452	2-1/2"	3"	5"
241-10460	10464	241-10461	10462	2-1/2"	3-1/2"	5"
241-10470	10474	241-10471	10472	2-1/2"	4"	5"
241-05050	10504	241-05051	10505	3"	1/2"	6"
241-10510	10514	241-10511	10512	3"	1"	6"
241-10520	10524	241-10521	10522	3"	1-1/2"	6"
241-10530	10534	241-10531	10532	3"	2"	6"
241-10540	10544	241-10541	10542	3"	2-1/2"	6"
241-10550	10554	241-10551	10552	3"	3"	6"
241-10560	10564	241-10561	10562	3"	3-1/2"	6"
241-10570	10574	241-10571	10572	3"	4"	6"
241-06050	10604	241-06051	10605	3-1/2"	1/2"	6-1/4"
241-10610	10614	241-10611	10612	3-1/2"	1"	6-1/4"
241-10620	10624	241-10621	10622	3-1/2"	1-1/2"	6-1/4"
241-10630	10634	241-10631	10632	3-1/2"	2"	6-1/4"
241-10640	10644	241-10641	10642	3-1/2"	2-1/2"	6-1/4"
241-10650	10654	241-10651	10652	3-1/2"	3"	6-1/4"
241-10660	10664	241-10661	10662	3-1/2"	3-1/2"	6-1/4"
241-10670	10674	241-10671	10672	3-1/2"	4"	6-1/4"
241-07050	10704	241-07051	10705	4"	1/2"	6-1/2"
241-10710	10714	241-10711	10712	4"	1"	6-1/2"
241-10720	10724	241-10721	10722	4"	1-1/2"	6-1/2"
241-10730	10734	241-10731	10732	4"	2"	6-1/2"
241-10740	10744	241-10741	10742	4"	2-1/2"	6-1/2"
241-10750	10754	241-10751	10752	4"	3"	6-1/2"
241-10760	10764	241-10761	10762	4"	3-1/2"	6-1/2"
241-10770	10774	241-10771	10772	4"	4"	6-1/2"
—	—	241-10781	10782	4"	5"	6-1/2"





### PETERBILT AIR LEAF ADJUSTING SHIM

Ascot No.	Mfg. No.	Size	Qty.
246-35010	35010	1/32"	6
246-35011	35011	1/16"	6
246-35012	35012	1/8"	6

246-35010

### FREIGHTLINER ADJUSTING SHIMS

Ascot No.	Mfg. No.	Size	Qty.
246-35020	35020	1/32"	6
246-35021	35021	1/16"	6
246-35022	35022	1/8"	6

246-35020

### VOLVO/WHITE TANDEM SHIMS

Ascot No.	Mfg. No.	Size	Qty.
246-35030	35030	1/32"	6
246-35031	35031	1/16"	6
246-35032	35032	1/8"	6

246-35030

### I.H.C. TORQUE ARM SHIMS

Ascot No.	Mfg. No.	Size	Qty.
246-35040	35040	1/32"	6
246-35041	35041	1/16"	6
246-35042	35042	1/8"	6

246-35040

## HEAVY DUTY ALIGNMENT



### SINGLE SLOT TANDEM TRUCK SHIMS

• Universal shims are installed at the ends of torque rod to change toe and/or thrust angles on Freightliner, Hendrickson and Navistar heavy duty tandem trucks and trailers

Ascot No.	Mfg. No.	Size	Qty.
246-35060	35060	1/32"	6
246-35061	35061	1/16"	6
246-35062	35062	1/8"	6

246-35060

### FREIGHTLINER SHIMS FOR AIR GLIDE SUSPENSION

• Over-the-road heavy duty adjusters for fast and accurate means to align front or rear axles of popular tandem trailers and trucks • Reliable means to complete total heavy duty truck alignments

Ascot No.	Mfg. No.	Size	Qty.
246-35070	35070	1/32"	6
246-35071	35071	1/16"	6
246-35072	35072	1/8"	6

246-35070

### PETERBILT/KENWORTH FLEX AIR SUSPENSION SHIMS

• Adjust thrust angle and toe by shimming the torque arms

Ascot No.	Mfg. No.	Size	Qty.
246-36010	36010	1/32"	6
246-36011	36011	1/16"	6
246-36012	36012	1/8"	6

246-36010

### HENDRICKSON WALKING BEAM SHIMS


• O.E. style shims recommended by Hendrickson  
• Offers three adjustments of 0, 3/16" and 3/8"



Ascot No.	Mfg. No.	Qty.
241-36080	36080	2
241-36085	36085	2

### HENDRICKSON HD SHIMS

• Shim kit will adjust the thrust angle on Hendrickson's "walking beam" rear tandem axle suspension • Improves tire wear and handling by adjusting thrust angle from 0° to 3/8" in precise 1/32" increments • **INCLUDES:** 2 (two)-five piece kits • Requires one set per wheel



241-36087

Ascot No.	Mfg. No.	Description
241-36087	36087	Hendrickson HD Shims

### TIRE MATING SQUARE

• Checks for variance in dual tire mating  
• Compare tire size by placing long arm against the side wall and short arm against tread



247-18440

Ascot No.	Mfg. No.	Description
247-18440	91844	<b>LENGTH:</b> Long Arm 48", Short Arm 26"



### TOE BAR WITH SCRIBE

• Gives toe readings (in 1/32 of an inch increments) by measuring distances between marks scribed at the center of the tire treads • **INCLUDES:** 8 ft. bar, 17 in. pointers, 5 in. stands and #WA516 scribe • Reliable means to complete total heavy duty truck alignments



246-51100

Ascot No.	Mfg. No.	Description
246-51100	99511	For Cars and Light Trucks
247-51200	99512	For Trucks, Buses, RVs, Vans

### TRUCK FRONT SLIP PLATE SET (PAIR)

• Used in conjunction with the WA515 toe gauge  
• Steel slip plates allow the tire to move freely while the technician sets the toe




247-18410

Ascot No.	Mfg. No.	Description
247-18410	91841	16" x 24" x 3/8"

### TRAILER TANDEM TRACKER

• Used to aid in measuring the tracking of tandem axles in relationship to the kingpin suspensions and the front and rear axles on the tandem • Establishes a measuring point from the center of the wheel



246-18880

Ascot No.	Mfg. No.	Description
246-18880	91888	Trailer Tandem Tracker Set (Pair)

### TANDEM AXLE CALIPER

• Used to check the spacing between the axles of tractors or trailers for alignment and tracking  
• Easy to read scale in both metric and inches, with a range of 72"



246-18910

Ascot No.	Mfg. No.	Description
246-18910	91891	Tandem Axle Caliper



## HEAVY DUTY ALIGNMENT



### LO PROFILE EXTENDER BARS

• The 91887 Lo Profile Extender Bar is designed to lower the measuring point of the tandems from the hub so that measuring the tracing of low profile trailers, such as car carriers and moving vans can be easily done • Can be used with either the 91888 or the 91890 • Sold in pairs

Ascot No.	Mfg. No.	Description
247-91877	91877	Lo Profile Extender Bars



### S-CAM BUSHING EXTRACTOR

• Great tool for any Heavy Duty shop that works on low boys, reefers, log trucks and more • Now you can remove and replace the S-Cam bushing on air brake equipped trailers without removing the wheel hub or replacing the wheel seal • Save time and money yourself and for your customer with this innovative durable tool • Offer S-Cam replacement with every brake job!



Ascot No.	Mfg. No.	Description
247-91860	91860	S-Cam Bushing Extractor

### "U" BOLT EXTENSIONS

• This extension set is used to measure the tandem axles on tractors in relationship to the front spring "U" bolts • The extenders establish a measuring point on the front axles so you can make accurate measurements to the rear axle • Measurements "A" and "D" should be equal as well as measurements "B" and "C" if the vehicle is tracking correctly on the front axle • Includes four extenders - two with 1/4" threads and two with 7/8" threads • Use with 91877 or 91889 and 91888 or 91890



Ascot No.	Mfg. No.	Description
247-91896	91896	"U" bolt Extensions (4)

### TANDEM ALIGNMENT SYSTEMS - STEEL WHEELS


• This is a simple method for tracking the rear dual tandems on trucks and tractors • INCLUDES: The 91896 "U" Bolt Extensions, a pair of Lo Profile Extension Bars (91877) and a pair of 91888 Tandem Trailer Trackers • With this system the technician can easily check the A and D distances along with the B and C distances to see if the tandems are tracking correctly



Ascot No.	Mfg. No.	Description
247-91888	91888	Tandem Alignment Systems - Steel Wheels

### TANDEM ALIGNMENT SYSTEMS - ALUMINUM WHEELS

• The 91990 is a simple method for tracking the rear dual tandems on trucks and tractors • INCLUDES: The 91896 "U" Bolt Extensions, a pair of Lo Profile Extension Bars (91877) and a pair of 91890 Tandem Tracker Set for Aluminum Wheels • With this system the technician can easily check the A and D distances along with the B and C distances to see if the tandems are tracking correctly



Ascot No.	Mfg. No.	Description
247-91990	91990	Tandem Alignment Systems - Aluminum Wheels

### HEAVY DUTY & OTR TOE BAR SET

• INCLUDES: 10" extra-high stands, two standard 11" pointers, two long 17" pointers, an 8 ft. bar and 99516 scribe

Ascot No.	Mfg. No.	Description
247-99515	99515	Heavy Duty & OTR Toe Bar Set



### TOE BAR SET FOR LIGHT TRUCKS

• INCLUDES: everything in the 99515 Toe Bar Set plus an additional pair of 5" stands

Ascot No.	Mfg. No.	Description
247-99517	99517	Toe Bar Set for Light Trucks



### AIR BLADDER CAMBER ADJUSTING TOOL

• Air-assisted, multiple camber adjustment tool makes camber adjustment on many GM and Chrysler vehicles easier • Simply loosen the strut mount bolts, place the adjuster between the tire and strut, and inflate • To adjust camber slowly release the air until the wheel retracts to the specified alignment setting, tighten bolts and the alignment is done • INCLUDES: A specially designed, puncture resistant air bladder, 2" air hose, a low pressure pop-off valve to prevent overinflating and an air control valve for inflating and controlled deflating

Ascot No.	Mfg. No.	Description
228-61400	DOWTC614	Air Bladder Camber Adjusting Tool



### H/D STEEL WHEEL RIM STRAIGHTENING TOOL

• For quick and easy removal of indentations on wheel flanges and rims of most vehicles • Allows proper tire seating, giving greater tire protection and durability • Powder coated for added durability

Ascot No.	Mfg. No.	Description
247-08130	81309	H/D Steel Wheel Rim Straightening Tool



### RADIAL RUNOUT GAUGE

Radial runout is an out of round condition in which the radius of the wheel or tire is not consistent from the wheel center to any point on the rim or the tread. Tire and wheel radial runout are often factors in troubleshooting ride and handling and in maintaining correct wheel balancing to reduce vibration.

• Measures vehicle vibration sensitivity • Measures out of round condition • EASY TO USE: only 2 adjustments • Pinpoints high or low spots in the tire • Determines accurate centering of tire and wheel mounting



Ascot No.	Mfg. No.	Description
247-33173	64250	Radial Runout Gauge





BATTERY CHARGERS & TESTERS



PROSERIES 12V 2200 PEAK AMP  
JUMP STARTER WITH USB  
AND DC POWER

- **POWERFUL PERFORMANCE:** 525 CA, 350 CCA • High output AGM battery • 2A external automatic charger • 2.1A USB port • 12V DC outlet • Digital display • ON/OFF switch • Reverse connection warning • Schu Eco Energy: Meets the highest industry standards




341-00114

Ascot No.	Mfg. No.	Description
341-00114	DSR114	ProSeries 12V 2200 Peak Amp Jump Starter with USB and DC Power

PROSERIES 1800 PEAK AMP  
JUMP STARTER

Jump Starter + 12V DC power source

- **OUTPUT CURRENT (PEAK):** 1800A • **DIMENSIONS:** 8.25" x 12.38" x 12" • **WEIGHT:** 19.59 lb. • **WARRANTY PERIOD:** 1 year • **800 PEAK AMPS:** Power for jump starting vehicles in emergencies • **BUILT-IN CHARGER:** For automatic charging of internal battery • **LED INDICATORS:** For charging and status of internal battery • Maintenance-free, sealed lead-acid AGM battery • 12V DC power outlet with overload and short-circuit protection • Heavy-duty clamps fit both top- and side-mount batteries • 4-gauge, 28" flex performance cable • Compact, durable and corrosion-proof polypropylene case • **SCHU ECO ENERGY:** Meets the highest industry standards



341-00119

Ascot No.	Mfg. No.	Description
341-00119	DSR119	ProSeries 1800 Peak Amp Jump Starter

6/2/40/20/250/125A 12/24V  
AUTOMATIC BATTERY CHARGER/  
ENGINE STARTER

- **250A/12V AND 125A/24V ENGINE START:** Powerful enough for SUVs, trucks and large engines • **40A OR 20A BOOST MODE:** Quickly brings deeply discharged batteries back to life • **MULTI-FUNCTION BATTERY TESTER:** For battery status and charging system analysis • **MICROPROCESSOR-CONTROLLED:** Automatically adjusts amperage rate, to charge and maintain • **MULTI-STAGE CHARGING:** For added precision, safety and battery life • **FLOAT MODE MONITORING:** Maintains optimum battery charge • Auto voltage detection • Reverse hook-up protection • **SCROLLING DIGITAL DISPLAY:** Gives step-by-step instructions to properly charge your battery • LED indicators and push-button controls • **4-GAUGE OUTPUT CABLES:** Stay flexible in cold weather • Clamps and cords on front of unit • Convenient clamp rest in handle • Compact wheels for easy storage • **SCHU ECO ENERGY:** Meets the highest industry standards



341-01352

Ascot No.	Mfg. No.	Description
341-01352	SC1352	6/2/40/20/250/125A 12/24V Automatic Battery Charger/Engine Starter

BENCH GRINDERS & SHOP VISES



6" SWIVEL BASE BENCH VISE

- **Heavy duty 30,000 PSI castings for long life and added strength** • Swivel bar rotates 360° and has double lockdowns ensuring maximum stability • Powder coat paint resists scratches and provides a tough durable finish • Replaceable hardened steel top and pipe jaws



311-21500

Ascot No.	Mfg. No.	Jaw Width	Throat Depth	Pipe Cap.	Wt.
311-21500	21500	6"	4-1/8"	1/4 - 3-1/2	69.35 lb.

TRADESMAN VISES

- **Fully sealed one-piece spindle nut assembly for a lifetime of smooth operation** • Precision machined slide bar to eliminate movement in front jaw regardless of opened position • 60,000 PSI ductile iron body, jaw & base • Machined steel serrated jaws with black phosphate coating for increased durability and corrosion resistance • Lifetime Warranty



311-28806

Ascot No.	Mfg. No.	Jaw Width	Opening Capacity Max.	Throat Depth	Pipe Jaw Capacity	Weight
311-28805	28805	4-1/2"	3-1/2"	3-1/2"	1/4" - 3-1/2"	42 lb.
311-28806	28806	5-1/2"	5"	3-5/8"	3/8" - 3-1/2"	42 lb.
311-28807	28807	6-1/2"	6"	4-1/4"	3/8" - 4"	42 lb.
311-28808	28808	8"	6-3/4"	5"	3/8" - 4-1/2"	111 lb.

MECHANICS PRO VISES

- **Enclosed Spindle for smooth operation** • Precision machined slide bar to eliminate movement in front jaw regardless of opened position • Needle roller thrust bearing to easily apply and release clamping force • 60,000 PSI Jaw and Base • Lifetime Warranty



311-28811

Ascot No.	Mfg. No.	Jaw Width	Opening Capacity Max.	Throat Depth	Pipe Jaw Capacity	Weight
311-28810	28810	4-1/2"	4"	3-1/2"	1/4" - 3"	31 lb.
311-28811	28811	5-1/2"	5"	3-5/8"	1/4" - 3"	38 lb.
311-28812	28812	6-1/2"	6"	4-3/8"	1/4" - 4"	56 lb.
311-28813	28813	8"	8-1/2"	4-1/2"	1/2" - 4"	83 lb.
311-28814	28814	10"	12"	5-1/4"	1/2" - 5"	115 lb.

PROFESSIONAL SHOP VISES

- **Cast iron jaw with heavy internal ribs for added strength. Pipe jaws are permanently cast in for greater channel strength** • Cast iron back jaw designed for exceptional alignment with the front jaw • "V" notched, replaceable/reversible jaws made of carbon steel and heat treated for extra strength • Specially designed spring loaded handle and screw guarantees quick jaw response • Front jaw beam covers and protects screws • Steel handle balls forged from handle stock • Lifetime Casting Warranty



311-64055

Ascot No.	Mfg. No.	Jaw Width	Jaw Opening	Throat Depth	Pipe Jaw Capacity	Weight
311-64055	64055	5-1/2"	6-1/2"	3-3/16"	1/8"	30 lb.
311-64065	64065	6-1/2"	7-1/2"	3-3/4"	1/8"-2-1/2"	41 lb.
311-64650	64650	6-1/2"	7"-10"	3-3/16"	1/8"-2-1/2"	50 lb.
311-64800	64800	8"	8"-11"	3-3/4"	1/8"-3"	74 lb.





PLIERS & SCREWDRIVERS



7" CUTTING PLIER WITH END CUTTER

- Perfectly mated cutter, heat treated to hold its edge • Polished high carbon drop forged steel • CHANNELLOCK BLUE™ comfort grips



319-00357

Ascot No.	Mfg. No.	Description
319-00357	357	7" Cutting Plier with End Cutter

5" CUTTING PLIER, BOX JOINT

- Perfectly mated cutters, scientifically heat treated to hold their edge • Precision made of fine polished, high carbon drop forged steel • Distinctive CHANNELLOCK BLUE™ comfort grips



319-00435

Ascot No.	Mfg. No.	Description
319-00435	435	5" Cutting Plier, Box Joint

CHANNELLOCK PLIERS

- 100% MADE IN USA
- LASER heat-treated cutting edges perform better and last longer
- FORGED high carbon U.S. steel for maximum strength and durability is specially coated for ultimate rust prevention
- CHANNELLOCK BLUE™ grips for comfort



319-00358

Ascot No.	Mfg. No.	Description
319-00358	358	8" End Cutting Plier

6" DIAGONAL CUTTING PLIER, BOX JOINT

- Perfectly mated cutter, heat treated to hold its edge • Polished, high carbon drop forged steel • Distinctive CHANNELLOCK BLUE™ comfort grips



319-00436

Ascot No.	Mfg. No.	Description
319-00436	436	6" Diagonal Cutting Plier, Box Joint

6" SLIP JOINT PLIER, WIRE CUTTING SHEAR

- Thick Nose Pliers • Shear-type wire cutter • Precision made of fine polished, high carbon drop forged steel • Patented PermaLock™ fastener eliminates nut and bolt failures • CHANNELLOCK BLUE™ comfort grips



319-00526

Ascot No.	Mfg. No.	Description
319-00526	526	6" Slip Joint Plier, Wire Cutting Shear

8-PIECE PROFESSIONAL SCREWDRIVER SET

- Includes 5 flat tip drivers and 3 Phillips tip drivers: SLOTTED: 3/8" x 8", 5/16" x 6", 1/4" x 4", 3/16" x 3", 1/4" x 1-1/2" • PHILLIPS: #2 Phillips x 4", #1 Phillips 3", #2 Phillips x 1-1/2" • Black handles • Hardened chrome vanadium shafts • Vapor blasted magnetic tips • Packaged in molded plastic tray for storage • Hex bolsters for extra turning power



319-19800

Ascot No.	Mfg. No.	Description
319-19800	19800	8-Piece Professional Screwdriver Set

SHOP CLEANERS & BRUSHES



PREMIUM HAND WIPES

Winntec's premium hand wipes are the perfect way to keep clean in any workshop.

- Powerful cleaning
- Moisturizing • Great for hands and surfaces • Water saving • 336 wipes per box



395-83039

Ascot No.	Mfg. No.	Description
395-83039	G083039	Premium Hand Wipes

FLOOR SQUEEGEES

- Black neoprene rubber blade designed for rough, heavy use • Handle not included, order separately



395-45507

Ascot No.	Mfg. No.	Description
395-45507	45507	24" Straight Squeegee
395-44020	44020	Handle

PALMYRA FILL GARAGE BRUSHES/ BROOMS

- Excellent for heavy duty sweeping of concrete, sidewalks and garage floors • Can be used for wet or dry sweeping



395-42023

Ascot No.	Mfg. No.	Description
395-42023	42023	24" Garage Brush- Palmyra



SURFACE PREP & CLEANING WIPES

- Wheel cleaner compatible with adhesive wheel weights • Safe for all clear coated wheels • Fast acting, No rinse required • Ideal for use as a multi-purpose cleaner on car interior & exterior • Professional strength performance removes dirt, grease and brake fluid from wheels, windows, tools, shop equipment, floors & many other surfaces • 300 wipes per bucket, 6 buckets per case



Ascot No.	Mfg. No.	Description
486-21638	21638-5426300	Surface Prep & Cleaning Wipes (For Adhesive Wheel Weights)

PLASTIC HANDLED BRASS SIDEWALL BRUSH

- Densely packed brass bristles • Great for cleaning white sidewall tires • BRISTLE LENGTH: 3/4" • OVERALL LENGTH: 8-1/4" • Plastic handle fits comfortably in the hand



395-13124

Ascot No.	Mfg. No.	Description
395-13124	VT-932	Plastic Handled Brass Sidewall Brush

WOODEN HANDLED WIRE BRUSH WITH METAL SCRAPER

- Cleans rust from rims and wheels • 19 rows of steel bristles • Slightly curved wooden handle • Metal scraper included • BRISTLE LENGTH: 1" • OVERALL LENGTH: 14-1/4"



535-00150

Ascot No.	Mfg. No.	Description
535-00150	VT-931	Wooden Handled Wire Brush with Metal Scraper





SHOP CLEANERS & BRUSHES



GOJO® SUPRO MAX™ HAND CLENER

- Effective on oil, grease, paint, and adhesives
- Unique blend of cleaners and skin conditioners help leave skin feeling healthy
- Non-drying formula



395-72722

395-72724

GOJO® NATURAL ORANGE™ PUMICE HAND CLENER

- Effective on dirt, oil and grease • Quick-acting, lotion hand cleaner with pumice scrubbers

\*Natural citrus ingredient



395-72552

395-72554

Ascot No.	Mfg. No.	Description
395-72722	7272-D2	PRO™ TDX™ 2000 Starter Kit (1 Dispenser, 1 Refill)
395-72724	7272-O4	2000 mL Refill (4 per case)

Ascot No.	Mfg. No.	Description
395-72552	7255-D2	PRO™ TDX™ 2000 Starter Kit (1 Dispenser, 1 Refill)
395-72554	7255-O4	2000 mL Refill (4 per case)
395-09552	0955-O2	2x 1-Gallon Pump Bottles



FULL BORE HAND CLENER

- Rids hands of dirt and grease while leaving the skin soft and chap free • Solvent free • Economical • Contains skin moisturizers • Clean fragrance • Never irritates or burns open wounds • Rinses clean • Keeps your sink clean • Keeps your pipes clean • Will not separate during hot months • Long shelf life • Neutral pH • MEETS AMERICAN CLEAN WATERS ACT

Ascot No.	Mfg. No.	Description
<b>ULTRA FLOW</b>		
395-00101	TS1GAL	Ultra Flow, 1 Gallon
395-00102	TS1GAL-FT	Ultra Flow, 1 Gallon Flat Top
395-00103	TS1GAL-16OZ	Ultra Flow, 16 oz. **
<b>ULTRA FLOW DISPENSERS</b>		
395-00104	Plastic Pump	Plastic Pump
395-00300	TS300-D	Stainless Steel Screw On Dispenser **
395-00125	TS125-D	Stainless Steel Wall Mount Dispenser
395-00126	TS125-FT-D	Stainless Steel Wall Mount Dispenser (Fits Flat Top)
<b>SUPER GRIT</b>		
395-40000	TS4000	Super Grit, 4 Gallon **
395-06400	TS6400	Super Grit, 64 oz.
<b>EXTREME GREEN</b>		
395-00400	MG-HS-4GAL	Extreme Green, 4 Gallon **
395-06401	MG-HS-64OZ	Extreme Green, 64 oz.



SERVICE STICKERS



STATIC CLING PRINTER

- Full feature Reminder Sticker Solution takes professionalism to a new level • Godex Printer pre-programmed to work out of the box • 1 year parts and labor warranty (6 months on print head) • Includes 1 ribbon



399-11111

Ascot No.	Mfg. No.	Description
399-11111	FK-GX001-05	Static Cling Printer

STATIC CLING REMINDER STICKERS

- Excellent item to promote repeat business • Keeps your name, the service to be done and the time to do it in constant view of the customer • More effective than a door jam sticker • Static cling vinyl will cling to almost any smooth surface • No adhesive residue and they can be removed for cleaning and replacing • Silk screen printing process for a high quality image and a writing strip that won't allow the ink to fade • Generic design stickers as well as personalized stickers



Ascot No.	Description
399-00101	Air Pressure/Tire Rotation Static Cling Sticker
399-00102	Oil Change Static Cling Sticker
399-00103	Service Reminder Static Cling Sticker



INTERIOR PROTECTION PRODUCTS



The Slip-N-Grip® protection system provides total protection for the customer's car while being serviced:

- Covers hold fast to the upholstery: A patented process laminates two distinctly different plastics together - the top layer allows a person to easily slide into and out of the vehicle and the bottom, or gripping layer, keeps the seat cover in place
- Unique process eliminates static electric clinging and wrinkling.

A complete line of vehicle interior protection products are available along with a service center roll dispenser.



PARTS RETURN BAG

- Heavy plastic bag for holding old removed parts you've replaced • Keeps customer's vehicle and hands clean

Ascot No.	Mfg. No.	Description	Size
399-60098	FB-P9943-56	Parts Return Bag	14" x 22"

PAPER KEY TAG

- Cost-effective, convenient solution for key control • Metal ring



Ascot No.	Mfg. No.	Description	Size	Qty.
399-98313	FB-P9833-13	Paper Key Tag with Metal Rings	1.5" x 2.75"	1,000/box

PLASTIC KEY TAG

- Self-locking design holds keys secure • Large writing surface; holes are fully punched out eliminating "chads" • Perfect for quickly tagging keys in a busy service area



Ascot No.	Mfg. No.	Description	Qty.
399-99323	FB-P9933-23	White Plastic Key Tag - 4.5" x .75"	1000/package


WORK TICKET HOLDER

- Heavy-duty sewn nylon fabric handle ensures durability even in harsh conditions • Durable brass grommet increases strength

Ascot No.	Mfg. No.	Description	Size	Qty.
399-99302	FB-P9933-02	Work Ticket Holder	10.5" x 14.5"	25/box

PLASTIC FLOOR MAT

- Slip-N-Grip® two-layer construction ensures plastic floor mat stays in place
- Impervious to water, oil, grease and most shop chemicals



Ascot No.	Mfg. No.	Description	Qty.
399-99432	FG-P9943-02	Plastic Floor Mat	500/roll

GENERIC ADHESIVE TIRE LABEL

- Features sure-grip adhesive • Proper used tire labeling sells tires • These labels will catch your customer's eye and promote sales

Ascot No.	Mfg. No.	Description	Qty.
399-99479	FB-P9943-79	Generic Adhesive Tire Label - 3" x 6"	500/roll



PERSONALIZED PAPER FLOOR MATS

- Either insert your logo where the footprints are or totally design a new layout
- The stock is a high bulk 60 pound white sheet, size 17" x 22", with a one color imprint • Minimum order of 3,000 • Camera ready art must be supplied for all logos - one time artwork charge



Ascot No.	Description
399-00005	Personalized Paper Floor Mats

PRIME HEAVY DUTY PAPER FLOOR MATS

- Treated/coated mats, made from premium prime/virgin paper • Keeps dirt, grease, oil, spills, leaks and other shop fluids out of your customer's vehicle during service • Prime paper is suitable for all weather climates and heavy foot traffic • Prime paper directly from paper mill provides same consistent quality every time • Printed with UV ink • Bright white paper produces vibrant, full color prints • Recyclable • SIZE: 17" x 19" • QUANTITY: 500 per box



Ascot No.	Mfg. No.	Description
399-74980	M3273PP2280A	Prime Heavy Duty Paper Floor Mats - 17" x 19"

Prime Heavy Duty Paper Floor Mat in use.

PLASTIC ARROW KEY TAG

- Unique one piece key tag that attaches easily to the key ring with a hole for hanging on a board • Packaged 40 perforated sheets with 25 tags each • 1000 per pack

Ascot No.	Description
399-00011	Plastic Arrow Key Tag

TIRE LABELS

- 2-1/2" x 6" label for easy identification of new, used and retreaded tires • Packed 500 per roll



Ascot No.	Mfg. No.	Description
601-00101	TL-101	Tire Labels New-Used-Retread

STEERING WHEEL COVER

- Keeps grease, dirt and other shop chemicals off of one of the most noticeable and expensive parts of the car • Reusable/disposable steering wheel covers are made of clear polyethylene with stretch elastic grip feature • Elastic design is easier to apply and remove than stretch wrap covers • Unique double-band steering wheel covers stays in place while allowing access to airbags



Ascot No.	Mfg. No.	Description
399-99433	M-FB-P9943-33	Standard Size Double Band Steering Wheel Cover: <ul style="list-style-type: none"><li>• Size: 5" wide</li><li>• Fits up to 24" Steering Wheel up to 15.2" in diameter</li><li>• Covers virtually all passenger cars and light trucks</li><li>• Quantity: 500 per box</li></ul>



## TIRE DISPLAYS, RACKS & CARTS



### FLOOR-RACK START-UP KIT

• Promotes your professional image by displaying your complete line of car interior protection products where your customers can see you putting them in their car • Convenient roll dispenser work station provides organized storage, helps save employee time and shows your customers you care about their car



399-60000

Ascot No.	Mfg. No.	Description
399-60000	FK-P9943-76	Product Dispenser System (Includes Product)

### FLOOR DISPENSER RACK

• Industry-leading dispenser system keeps products organized and within reach • Presents "We Care" image and promotes cleanliness • Retention straps prevent free-rolling and locking casters keep dispenser in place • Top tray holds paper floor mats and other service items while lower tray provides extra storage



399-98893

Ascot No.	Mfg. No.	Description
399-98893	FB-P9833-89	Floor Dispenser Rack

## DRAINS & PUMPS



**Balcrank**  
Fluid Dispensing Systems

### BALCRANK PUMPLESS SELF-EVACUATING DRAINS - ROUGHNECK II

Self-evacuating pumpless drain; no pump required!

- Drain used motor oil or antifreeze into a 23-gallon steel reservoir, then connect to an air supply to evacuate used motor oil or antifreeze into any approved used bulk fluid storage container
- **DURABLE POWDER COAT FINISH:** Black for motor oil and green for antifreeze



322-41122

322-41123

Ascot No.	Mfg. No.	Capacity	Description
322-41122	4110-022	23-Gallon	Roughneck II Drain for Used Motor Oil
322-41123	4110-023	23-Gallon	Roughneck II Drain for Used Antifreeze

### BALCRANK USED FLUID EVACUATION DRAINS

Premium series drains capture used fluid and allow for easy transfer to any bulk storage container using a cam-lock kit and evacuation pump system.

- **DURABLE POWDER COAT FINISH:** Black for motor oil or green for antifreeze
- **MADE IN THE USA**



322-41124

322-41125

Ascot No.	Mfg. No.	Capacity	Description
322-41124	4110-024	23-Gallon	Premium Duty Used Oil Drain
322-41125	4110-025	23-Gallon	Premium Duty Used Antifreeze Drain

### BALCRANK SPILLGUARD USED FLUID EVACUATION DRAINS

Spillguard series drains capture used fluid and allow for easy transfer to any bulk storage container using a cam-lock kit and evacuation pump system.

- Standard 3" caster set mounted on wide-track dolly
- **DURABLE POWDER COAT FINISH:** Black for motor oil or green for antifreeze
- **MADE IN THE USA**



322-41126

322-41127

Ascot No.	Mfg. No.	Capacity	Description
322-41126	4110-026	16-Gallon	Spillguard Used Motor Oil Drain
322-41127	4110-028	16-Gallon	Spillguard Used Antifreeze Drain

### BALCRANK ROLLING VACUUM EVACUATION DRAIN

Balcrank Used Fluid Evacuators are used for engine types that require top motor oil evacuation.

- These units use vacuum to remove fluid from top port of engine or through the dip stick • Optional clear Bowl attachment can be added or ordered to make measuring fluid removed faster and easier



324-41456

Ascot No.	Mfg. No.	Capacity	Description
324-41456	4140-056	5.2-Gallon	Truck Drain for Antifreeze
324-41457	4140-057	5.2-Gallon	Truck Drain for Antifreeze w/ Clear Dome



## DRAINS &amp; PUMPS



## 18-GALLON POLYETHYLENE WASTE OIL DRAIN

- 18 gallon capacity
- Plastic drain container
- Comes with 16.5" funnel
- Extends from 40" to 73"
- Metal trolley comes with 4 casters and pull handle for safe and easier movement around the shop
- Oil can be drained either by pour gravity, integrated drain valve or using integrated bung hole rotary barrel pump (not included)
- SHIP WEIGHT: 24 lbs.

Ascot No.	Mfg. No.	Description
329-08874	8874	18-Gal Polyethylene Waste Oil Drain



## 18-GALLON LOW PROFILE WASTE OIL DRAIN

- Low profile drain height of 7.75"
- Large 18 gallon baffled tank reduces "slosh" during transport
- Large metal screen provides extra draining area and keeps out debris
- Convenient rotary hand pump for fast evacuation
- Long steel handle provides easy mobility to drain area
- SHIP WEIGHT: 47 lbs.

Ascot No.	Mfg. No.	Description
329-08878	8878	18-Gal Low Profile Waste Oil Drain

## 24-GALLON WASTE OIL DRAIN

- Large 24 gallon steel recovery tank with 6' drain hose
- Tank-mounted oil-level sight gauge and convenient tool tray
- Standard 15-3/4" drain funnel and wide 24" funnel adapter (shown) with drain tube that extends from 54" to 79"
- Pressure regulator
- Heavy duty wheels and casters
- SHIP WEIGHT: 82 lbs.

Ascot No.	Mfg. No.	Description
329-08890	8890	24-Gal Waste Oil Drain with Pressurized Evacuation

## 24-GALLON WASTE OIL DRAIN WITH PROBE KIT

- 18 gallon suction capacity
- 100 PSI shop air connected to vacuum gauge quickly creates suction
- Large 16" collection funnel (4-7/8 gallon capacity)
- Suction extraction at 1/2 gallon per minute
- 78" suction and drain hoses
- Pressurized evacuation of tank makes emptying easy
- 70.8" maximum height
- Six flexible evacuation probes and VW, Mercedes and BMW adapters
- Two air ports: 1 for pressure, 1 for vacuum
- SHIP WEIGHT: 93 lbs.

Ascot No.	Mfg. No.	Description
329-08895	8895	24-Gal Waste Oil Drain/Evacuator with Probe Kit

HAND-OPERATED  
LEVER ACTION PUMP

- Suitable for dispensing lubricants and 100% anti-freeze • **PUMP INCLUDES:** 3/4" gooseneck spout, 3/4" telescoping suction tube, 1-1/2" and 2" combination bung-adaptor

Ascot No.	Mfg. No.	Description
323-13001	1300-001	Steel Hand Lever Pump

HAND-OPERATED  
ROTARY ACTION PUMP

- Suitable for dispensing lubricants and 100% anti-freeze • **PUMP INCLUDES:** 1" gooseneck spout, 1" suction tube, and 2" bung adapter

Ascot No.	Mfg. No.	Description
323-13022	1300-022	Steel Hand Rotary Pump



## ROLLING FLOOR TRUCK DRAIN

- Comes pre-assembled allowing for immediate use • Can be used for used motor oil or Antifreeze; decals provided for fluid identification • **FEATURES:** Two fixed wheels and 1 swivel caster, double baffles with upper screen and side splash lip • 3/4" or 1" Coupler kit sold separately

Ascot No.	Mfg. No.	Capacity	Description
322-41203	4120-003	5.2-Gallon	Truck Drain for Antifreeze
322-41467	4140-067	—	Cam-Lock Coupler, Adapter and Valve Kit (3/4") for 4120-003 drain
322-41206	4120-006	26-Gallon	Truck Drain for Motor Oil
322-41461	4140-061	—	Cam-Lock Coupler, Adapter and Valve Kit (1") for 4120-003 drain

HAND-OPERATED  
LEVER PUMP

- Suitable for dispensing water based media, detergents, soaps, anti-freeze, windshield wash, and lubricants • **PUMP INCLUDES:** Built-in 2" bung adaptor with a lock nut incorporated in the pump body for pump positioning, telescoping suction tube and a 3/4" outlet equipped with an air vent cap, when loosened, breaks the siphon action of pump

Ascot No.	Mfg. No.	Description
323-13019	1300-019	Poly Hand Lever Pump

HAND-OPERATED  
ROTARY PUMP

- Suitable for dispensing water based media, detergents, soaps, anti-freeze, windshield wash, lubricants • **PUMP INCLUDES:** 1" gooseneck spout, 1" telescoping suction tube, and 2" bung adapter

Ascot No.	Mfg. No.	Description
323-13133	1300-0133	Poly Rotary Pump

LOW PROFILE TRUCK  
OIL DRAIN WITH LID

- Holds 60 quarts • Equipped with 4 rollers and a handle for transport and positioning under trucks • Cover and curved side design help keep fluids from spilling during movement • Convenient handles and pour spout facilitate fluid evacuation • Rolls under most cab over axles so oil can be changed without jacks or jack stands • **OVERALL HEIGHT:** 7-1/2", **WIDTH:** 32-1/4", **LENGTH:** 49"

Ascot No.	Mfg. No.	Description
322-19202	19202	Low Profile Truck Oil Drain with Lid







### TRANSMISSION DRAIN FUNNEL

- 22" by 23" heavy duty plastic lift drain funnel
- Extends the catch area of any lift drain • Funnel catches any loose parts
- Prevents parts from falling through drain



322-17892

Ascot No.	Mfg. No.	Description
322-17892	17892	Transmission Drain Funnel

### TRUCK & TRAILER WHEEL PAN

- Prevents oil mess during wheel repair • The pan fits rims with 13 3/4" ID and larger • Handle compartments hold hub nuts out of the oil • Made of polypropylene for durability
- Will not warp if oil is warm • **CAPACITY:** 88 ounces



322-19852

Ascot No.	Mfg. No.	Description
322-19852	19852	Truck & Trailer Wheel Pan



### LOW BOY OIL DRAIN

- Rolls under trucks or buses to drain oil or antifreeze with ease • Constructed of heavy duty polyethylene that will resist rust, dents, automotive fluids and other chemicals • Gravity drain valve is recessed to protect it from damage and a wire screen in the pan prevents foreign matter from entering into the reservoir



322-24037

Ascot No.	Mfg. No.	Capacity	Description
322-24034	2400-34	17-Gallon	Low Boy Oil Drain
322-24037	2400-37	17-Gallon	Low Boy Oil Drain w/115V Evac

## DRAINS & PUMPS



### 18-GALLON OIL LIFT DRAIN

- Translucent jug holds 18 gallons and will not warp with hot oil • Rolls easily with four heavy-duty 2 1/2" wheels • Metal tubes extend working area from 36-1/2" to 77" • Drains from the bottom with a brass drain valve
- Large 15" funnel has a built in strainer to catch drain plugs



Ascot No.	Mfg. No.	Description
322-17432	17432	18-Gallon Oil Lift Drain

WILL NOT WARP WITH HOT OIL



### 30-GALLON OIL DRAIN W/ CASTERS

- Four heavy duty 4" casters (2 fixed and 2 swivel) • Heavy duty polyethylene construction • 3/4" evacuation valve
- Rugged 18" black polyethylene funnel with a 2" non-corrosive adjustable tube • Height adjusts from 55" to 78" • Oval shape ideal for easy movement in a garage or shop environment • Orange heavy duty polyethylene body is translucent for easy viewing of oil level
- **DIMENSIONS:** 18"D x 24"W x 55"H

HEAVY DUTY

EASY TO MOVE AROUND



329-24068

Ascot No.	Mfg. No.	Description
329-24068	2400-68	30-Gallon Oil Drain w/ Casters

## OIL ACCESSORIES



### 6-QT. OIL DISPENSER

- Translucent white (see-through) polyethylene material enables the user to read the liquid level on the container
- Marked in both quarts and liters • The flexible 8" pouring spout enables easy transfer of liquid • The spout is white



329-19732



### OIL FILTER CRUSHER

- Crushes up to 4 filters at a time in the 9"x16" crush chamber
- 38,000 lbs of crushing force
- A door safety switch is standard for fleet maintenance facilities where EPA and recycling policies are in effect



Ascot No.	Mfg. No.	Description
322-00015	TC-15	Oil Filter Crusher

Ascot No.	Mfg. No.	Description
329-19732	19732	6-Quart Oil Dispenser

### 8-QT. OIL DISPENSER WITH LID & CAP

- 8-Quart Dispenser with a spout cap and lid to keep out dirt, dust and other contaminants
- Many large SUVs and trucks now require more oil — works great to transport bulk oil
- Translucent white polyethylene material enables the user to read the oil level on the container up to 8 quarts and is marked in both quarts and liters • Flexible, removable 8" pouring spout enables easy transfer of liquid



329-19702

Ascot No.	Mfg. No.	Description
329-19702	19702	8-Quart Oil Dispenser with Lid & Cap

### RADIATOR FILLERS

- Long curved spout, balanced shape and handle positions • Weather resistant plastic
- 12-quart capacity



329-00505

Ascot No.	Mfg. No.	Description	Capacity
329-00505	6110-010	Black Plastic Radiator Filler	12 Quarts



### WATER/ANTI-FREEZE BIBB

- Durable, full volume dispense nozzle for water, windshield wash and antifreeze • 1/4" NPT female inlet



329-18685

Ascot No.	Mfg. No.	Description
329-18685	3340-014	Water/Anti-Freeze Bibb

## SAFETY PRODUCTS



## FACE SHIELDS

Ascot No.	Mfg. No.	Description
396-14955	14955	170-SB Crown and Window Kit
396-14200	14200	MAXVIEW™ Premium Face Shield - Clear Window
396-21000	21000	GPL500 Premium Goggle with Flip-Up Detachable Shield - Clear Lens, Anti-Fog

NEW

## SAFETY GLASSES-SMOKE LENS/CLEAR LENS

• 12 pcs. per inner box • 300 pcs. per case • Smoke lens • Anti-scratch and anti-fog coating • Lightweight, unisex protective eyewear • High wraparound coverage • Comfortable, contoured fit • Designed for indoor or outdoor use • Polycarbonate lenses absorb 99.9% UVA and UVB • ANSI Z87.1 CE EN 166

Ascot No.	Mfg. No.	Description
396-00902	SG-2 SMOKE	Safety Glasses-Smoke Lens
396-00901	SG-1 CLEAR	Safety Glasses-Clear Lens

## SAFETY GLASSES

• **Lightweight, stylish, comfortable and very affordable** • High impact optically correct wrap style unitary PC lens offers superior coverage • Soft, flexible temple tips & soft nose piece offers all day comfort • Temples are curved inwards to ensure comfortable, slip-resistant fit • Temple tips are curved outwards for gentle placement and removal • Meets ANSI Z87.1-2015 and tested to U.S. Military Standard MIL-PRF-31013 • Available in clear/black, amber/black and smoke/black styles

Ascot No.	Mfg. No.	Description
396-73601	S73601	Sellstrom XM330 Safety Glasses - Clear/Black
396-73611	S73611	Sellstrom XM330 Safety Glasses - Amber/Black
396-73621	S73621	Sellstrom XM330 Safety Glasses - Smoke/Black

## HEARING PROTECTION

Ascot No.	Mfg. No.	Description	Features
396-20773	20773	Jackson H70 Vibe Earplugs - Orange	Highly padded ear cups for all day comfort, Dielectric, durable thermoplastic material retains shape and pressure, Great for environments such as lawn mowers, industrial work, traffic noise, etc.
396-23412	S23412	Sellstrom Disposable Ear Plugs - FOAM Bullet Shape, Corded, Hi-Viz Green (100 pairs per box)	Gently but quickly expand to fit ear canal, Soft non-irritating PU foam for max comfort, Independently tested/certified to NRR 32 (ANSI S3.19), CSA Class AL.
396-23421	S23421	Sellstrom Reusable Ear Plugs - Tapered, Corded, Blue/Hi-Viz Green (100 pairs per box)	Ensure optimum ear canal coverage, Firm push/pull post for easy insertion/removal, Reusable - Can be washed and reused, Non-allergenic polymer materials
396-23430	S23430	Sellstrom Banded Ear Plugs - Tapered, Hi-Viz Green (1 per bag)	Wear around the neck when not in use, Regular and intermittent applications - Easily removed, Band shape curves at the plug end to keep pods up and clean when not in use

396-14955



396-14200

396-21000

396-00901

NEW

396-00902



396-73601



396-73611



396-73621



396-20773




396-23430



396-23421

www.ascotsupply.com

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).


## TEAR AWAY MESH SAFETY VESTS

• **Meets visibility standards and requirements for medium risk traffic control and public safety workers, including school crossing guards, survey crews and more** • **COOLING COMFORT** - Polyester mesh is breathable, durable and keeps you cool on the job • **HI-VIS** - Includes StarTech reflective tape for excellent visibility • Features 5 point tear-away and D-ring access slot



396-30561

396-30551

Ascot No.	Mfg. No.	Description
396-30551	V1030550U-S/M	Safety Vest - Hi-Vis Orange, Size S/M
396-30552	V1030550U-L/XL	Safety Vest - Hi-Vis Orange, Size L/XL
396-30553	V1030550U-2/3XL	Safety Vest - Hi-Vis Orange, Size 2XL/3XL
396-30554	V1030550U-4/5XL	Safety Vest - Hi-Vis Orange, Size 4XL/5XL
396-30561	V1030560U-S/M	Safety Vest - Hi-Vis Yel/Green, Size S/M
396-30562	V1030560U-L/XL	Safety Vest - Hi-Vis Yel/Green, Size L/XL
396-30563	V1030560U-2/3XL	Safety Vest - Hi-Vis Yel/Green, Size 2XL/3XL
396-30564	V1030560U-4/5XL	Safety Vest - Hi-Vis Yel/Green, Size 4XL/5XL



## DRIVEWAY SIGNAL AND HOSE

• **Know when you have a customer at the pumps with this 6" diameter driveway signal bell** • Completely self-contained unit makes installation easy • Each signal is manufactured to give you a signal that will perform under prolonged use



392-00805

Ascot No.	Mfg. No.	Description
392-00805	805	Driveway Signal - 110V 6" Dia. Bell
392-00838	838	50' Coil of Driveway Signal Hose
392-00839	839	300' Coil of Driveway Signal Hose

## KNEE PADS - ULTRA FLEX III

• **Articulating hinge ensures proper placement all day** • Soft elastic and wide straps are well placed and above the knee - No velcro • Strong & flexible plastic outer shells • Pads offer 5/8" closed cell foam pad, Sweat will not penetrate • Built for years of hard work and heavy use



396-96110

Ascot No.	Mfg. No.	Description
396-96110	S96110	KneePro Ultra Flex III Knee Pads - Grey/Orange

## EYE WASH STATIONS

• **The ideal first response solution when continuous water supply is unavailable** • Quickly flushes contaminants from eyes using a sterile, buffered & preserved solution • Can be wall-mounted or placed on flat surfaces • Highly visible green backboard • Available in 6 gallon personal station or 32 oz. bottle station



396-90333

396-90306

Ascot No.	Mfg. No.	Description
396-90306	S90306	Sellstrom 6-Gallon Gravit-Eye Portable Eyewash Station
396-90333	S90333	Sellstrom 32 oz. Double Rapid-Clear Eyewash Bottle Station



## DOT CONSPICUITY TAPE

• **Meets all Federal and State certifications** • Micro prismatic technology • Thin and flexible • 10-year durability



396-62150

Ascot No.	Mfg. No.	Description
396-62150	CT6R6W2150	2" x 150' (6" Red, 6" Silver)
396-72182	CT11R7W2X18	2" x 18" Strip (11" Red, 7" Silver)
396-72150	CT11R7W2150	2" x 150' (11" Red, 7" Silver)
396-82150	CTR2150	2" x 150' Solid Red
396-92150	CTW 2150	2" x 150' Solid Silver
396-93150	CTY2150	2" x 150' Solid Yellow

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com



## WHEEL CHOCKS



### RUBBER WHEEL CHOCK

- **Durable rubber construction**
- Features an eye bolt for chain or rope attachment
- Ribbed pyramid design
- Either side of wheel chock can be positioned against the tire
- Sold individually • **WEIGHT:** 10 lb. (4.5kg)

Ascot No.	Mfg. No.	Description
396-15300	15300	Rubber Wheel Chock



### OTR WHEEL CHOCK

- **DIMENSIONS:** 12" x 10" x 12"
- Designed for heavy duty truck and mining equipment
- 20" rope attached for convenience
- **NET WEIGHT:** 27.5 lb.

Ascot No.	Mfg. No.	Description
396-00102	TS102	OTR Wheel Chock



### POLYURETHANE WHEEL CHOCKS

- Rugged yet lightweight, weather-resistant Polyurethane wheel chocks
- Safety yellow for high-visibility and meets OSHA/MSHA standards
- Built-in carrying handle & holes for installation of ropes, chains and/or mounting brackets



Ascot No.	Mfg. No.	Tire Size	Size (L x W x H)	Weight
396-12590	12590	Up to 27 in.	8" x 7" x 6"	2
396-12593	12593	46" to 65"	12.125" x 15.25" x 10.75"	16
396-12594	12594	Up to 65 in.	16.25" x 14.5" x 13.25"	20
396-12596	12596	Up to 165 in.	24.5" x 14.25" x 16"	34

### URETHANE WHEEL CHOCKS

- **SOLID LIGHTWEIGHT CONSTRUCTION**
- High impact urethane material
- Non-conductive, no threat to puncture the tire
- Durable, lightweight and easy to use
- Extensively field tested



Ascot No.	Mfg. No.	Tire Size	Dimensions (LxWxH)	Weight
396-15336	15336	35" to 55" (90 cm to 140 cm)	13.3" x 8.6" x 7.8" (34 cm x 22 cm x 20 cm)	7.7 lb. (3.5 kg)
396-15337	15337	47" to 86" (120 cm to 220 cm)	18" x 12" x 9" (47.5 cm x 30.5 cm x 22.5 cm)	13 lb. (6 kg)
396-15338	15338	70" to 118" (180 cm to 300 cm)	22.5" x 13" x 14" (57 cm x 34 cm x 35.5 cm)	19.8 lb. (9 kg)
396-15339	15339	110" to 165" (280 cm to 420 cm)	26.7" x 13" x 14" (68 cm x 33.7 cm x 35.5 cm)	30.86 lb. (14 kg)
396-15342	15342	86" to 137.8" (220 cm to 350 cm)	24" x 13.5" x 12" (62.1 cm x 34.3 cm x 32.3 cm)	24.3 lb. (11 kg)
396-15353	15353	47" to 70" (120 cm to 180 cm)	13.38" x 9.84" x 7.8" (34 cm x 25 cm x 22.5 cm)	13.66 lb. (6.2 kg)

HIGH IMPACT URETHANE



www.ascotsupply.com

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).



## INDUCTION HEATERS



### INDUCTION HEATERS & ACCESSORIES

The professional's choice hand held flameless torch. The flameless solution for releasing corroded or frozen hardware and other metallic components from corrosion and threadlock compounds – all without the collateral damage normally associated with torches. Heats nuts red hot in seconds! Available in a variety of models for all applications.



Ascot No.	Mfg. No.	Description	Kit Contains
319-00555	U-555	Attachment Kit for Mini Ductor	• 3 Basic Coils: (MD99-601) 7/8" Pre-Formed Coil, (MD99-602) U-Form Coil, (MD99-603) 41" Bearing Buddy Coil
319-00777	MDV-777	Mini Ductor® Venom® - 110V	• 3 Basic Coils: (1) 7/8" Pre-Formed Coil, (1) 23" U-Form Coil, (1) 41" Bearing Buddy Coil • Rugged Plastic Carrying Case • Operator Manual • 2-year Manufacturer's Warranty
319-00787	MDV-787	Mini Ductor® Venom® HP - 120V	• 3 Basic Coils: (1) 7/8" Pre-Formed Coil, (1) 23" U-Form Coil, (1) 41" Bearing Buddy Coil • Rugged Plastic Carrying Case • Operator Manual • 2-year Manufacturer's Warranty
319-02011	IM-IND2011	Inductor Max HS	• U-Series Concentrator® (U-411): Instantly heats nuts, bolts and all types of hardware red-hot in seconds and removes body caulking, seam sealers and hail dents • U-Series Glass Blaster® (U-311): removes bonded glass, SMC panels, metal bond adhesives and spray-on bedliners • U-Series Fast-Off® Pad (U-211): removes stripes, vinyl graphics, body side moldings, sound pads, vapor barriers, stress relieving sheet metal repairs and more • Inductor Max Power Supply (MXPI) • (2) L-wedges (L-0810A) • Instruction manual • 1-year warranty
319-20311	GB-20311	Inductor Glass Blaster Kit	• Carrying case • (2) L-wedges (L-0810A) • Instruction manual • 1-year warranty
319-99660	MM99-660	Essential Coil Kit for Mini Ductor®	• Two 7/8" pre-formed coils (MD99-601: 5" L x 1.25" W) • Two 3/4" pre-formed coils (MD99-611: 4.5" L x 1.25" W) • One 7/8" long pre-formed coil (MD99-605: 9.5" L x 1.25" W) • One 1" pre-formed coil (MD99-610: 8.25" x 1.75" W) • One 7/8" long pre-formed coil (LCK) (MD99-621: 13.25" L x 1.25" W) • One 1" long pre-formed coil (MD99-622: 13.25" L x 1.75" W)
319-99675	MM99-675	Long Coil Kit for Mini Ductor®	• One 3/4" pre-formed coil (Part #MD99-620: 13.25" L x 1.25" W) • Two 7/8" long pre-formed coils (LCK) (MD99-621: 13.25" L x 1.25" W) • Two 1" long pre-formed coils (MD99-622: 13.25" L x 1.75" W) • One 1 1/4" pre-formed coil (Part #MD99-623: 13.25" L x 2" W) • One 1 1/2" pre-formed coil (Part #MD99-624: 13.25" L x 2" W) • One 1 3/4" pre-formed coil (Part #MD99-625: 13.25" L x 2.25" W)

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com

NEW

INDUCTION HEATERS



BEARING BUDDY PACK FOR MINI DUCTOR

- Kit Contents:
- (1) 41" Bearing Buddy™ Coil (MD99-603)
  - (1) 96" Bearing Buddy™ Coil (MD99-XBB96)
  - (1) 6" x 12" Heat Resistant Insulator (MD99-612)
  - (1) Compact Storage Tube

Ascot No.	Mfg. No.	Description
319-99643	MD99-643	Bearing Buddy Pack for Mini Ductor®



THIN WALL COIL PACK FOR MINI DUCTOR

- Kit Contents:
- (1) 1/2" Thin Wall Coil (MD99-629)
  - (1) 13/16" Thin Wall Coil (MD99-631)
  - (1) 7/8" Thin Wall Coil (MD99-632)
  - (1) 1" Thin Wall Coil (MD99-635)
  - (1) Compact Storage Tube

Ascot No.	Mfg. No.	Description
319-99644	MD99-644	Thin Wall Coil Pack for Mini Ductor®



THIN WALL COIL PACK FOR MINI DUCTOR


- Kit Contents:
- One 1 3/4" pre-formed coil (MD99-607: 8.75"L x 2.25"W)
  - One 1 1/2" pre-formed coil (MD99-608: 8.5"L x 2"W)
  - One 1 1/4" pre-formed coil (MD99-609: 8.25"L x 2"W)
  - One 1" pre-formed coil (MD99-610: 8.25"L x 1.75"W)
  - Two 7/8" pre-formed coils (MD99-601: 5"L x 1.25"W)
  - One 3/4" pre-formed coil (MD99-611: 4.5"L x 1.25"W)
  - One 7/8" long pre-formed coil (MD99-605: 9.5"L x 1.25"W)

Ascot No.	Mfg. No.	Description
319-99650	MD99-650	Standard Coil Kit for Mini Ductor®



MINI-DUCTOR® REPLACEMENT PARTS

Ascot No.	Mfg. No.	Description
319-99601	MD99-601	Mini-Ductor® 7/8" Pre-Formed Coil
319-99611	MD99-611	Mini-Ductor® 3/4" Pre-Formed Coil
319-99602	MD99-602	Mini-Ductor® 23" U-Form Coil

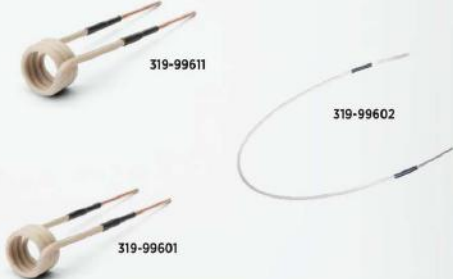

MECHANIC'S GLOVES



NITRILE GLOVES

- Powder-free disposable nitrile gloves • 4.5 mil
- Suitable for automotive and industrial applications
- QUANTITY: 100 per box, 10 boxes per case



Ascot No.	Mfg. No.	Description
396-00802	BLK-M	Black Nitrile Gloves (M)
396-00803	BLK-L	Black Nitrile Gloves (L)
396-00804	BLK-XL	Black Nitrile Gloves (XL)
396-00805	BLK-XXL	Black Nitrile Gloves (XXL)

RPG<sup>™</sup> NITRILE MICRO-DIAMOND GLOVES

- Textured finish • For industrial and automotive applications
- Powder-free • THICKNESS: 6 mil Not made from natural rubber latex • QUANTITY: 100 per box, 10 boxes per case



Ascot No.	Mfg. No.	Description
396-00301	32806BK240R2	Micro Diamond Black Nitrile Glove (Small)
396-00302	32806BK240R3	Micro Diamond Black Nitrile Glove (Medium)
396-00303	32806BK240R4	Micro Diamond Black Nitrile Glove (Large)
396-00304	32806BK240R5	Micro Diamond Black Nitrile Glove (XL)
396-00305	32806BK240R6	Micro Diamond Black Nitrile Glove (XXL)
396-00401	32806OR240R2	Micro Diamond Orange Nitrile Glove (Small)
396-00402	32806OR240R3	Micro Diamond Orange Nitrile Glove (Medium)
396-00403	32806OR240R4	Micro Diamond Orange Nitrile Glove (Large)
396-00404	32806OR240R5	Micro Diamond Orange Nitrile Glove (XL)
396-00405	32806OR240R6	Micro Diamond Orange Nitrile Glove (XXL)



RPG MECHANIC'S GLOVES

- Black synthetic leather palm with small patches
- Features blue spandex back with back of the hand protection • Impact protection • Hook and loop • One size fits most



Ascot No.	Description
396-10011	RPG Mechanic's Gloves

HIGH VISIBILITY MECHANICS GLOVES

- Grey synthetic leather with silicon printing on palm
- High visibility Spandex back with back of the hand protection • Impact protection • Hook and loop • One size fits most



Ascot No.	Mfg. No.	Description
396-14201	FGM-420	Green/Black Mechanics Gloves - Pair
396-14202	FOM-420	Orange/Black Mechanics Gloves - Pair



MECHANIC'S GLOVES



WORK GLOVES

Gaither's Work Gloves are designed to provide the best possible protection while still delivering the grip and flexibility required for performing intricate and complex tasks.

- Perfect for tire maintenance and general shop use • Machine washable • Impact protection • Double Stitched • Industrial grade hook and loop • Slip-free silicone grip



Ascot No.	Mfg. No.	Description
396-49101	G49110S	Small Work Gloves
396-49102	G49110M	Medium Work Gloves
396-49103	G49110L	Large Work Gloves
396-49104	G49110XL	Xtra Large Work Gloves

MISCELLANEOUS HAND PROTECTIVE GLOVES



396-40317



396-55220

Ascot No.	Description
396-06780	Wet Grip Neoprene Glove. Protects Against Acids, Caustics, Oils, Greases And Many Solvents. 9-Piece Flannel Liner
396-40317	Power Grip with Latex Premium Grip
396-55220	Leather Palm Glove with Safety Cuff, Elastic

COLORLED LEATHER DOUBLE PALM WORK GLOVES

- Split leather double palm • Colored fabric on the back of the hand • Half fleece lining • 12 pairs per package



396-55221

396-55222

Ascot No.	Mfg. No.	Description
396-55221	AB-R	Red Leather Double Palm Work Gloves
396-55222	AB-G	Green Leather Double Palm Work Gloves

HIGH VISIBILITY DUAL COLOR LEATHER DOUBLE PALM GLOVES

- Split leather double palm • High visibility green and orange colors • Half fleece lining • 12 pairs per package



396-55223

Ascot No.	Mfg. No.	Description
396-55223	AB-HVDC	High Visibility Dual Color Leather Double Palm Gloves

HEAVY DUTY DIAGNOSTIC TOOLS



ATS100 CV TURN ASSIST RADAR SYSTEM

- Radar-based turn-assist system for Commercial vehicles
- Active warning with OE-level radar technology
- Active warning in low speed situation, turn assist
- Active warning for vehicle in high speed situation, lane change assist
- Plug and Play installation, requires power supply
- Includes radar sensor and needed installation hardware
- Includes display unit with audible warnings
- 120 feet (37 Meter) Warning distance
- 180 Degree Field of View (FOV) coverage

Ascot No.	Mfg. No.	Description
356-00100	ATS100	ATS100 CV Turn Assist Radar System



356-00100

MAXISYS ULTRA ADVANCED DIAGNOSTIC TABLET

- Large 12.9" Touchscreen (2732 x 2048) / Android 7.0
- 2.3GHz + 1.7GHz Octa-core Processor / 256GB Memory
- Advanced VCMI 5-In-1 Device: VCI, Oscilloscope, Multimeter, Waveform Generator, CAN BUS Check
- Oscilloscope Preset Guided & Component Tests / Waveform Library
- New VCI Protocols: D-PDU, DoIP/CAN FD, Mega CAN
- Split Screen Multi-Application Function / Dual Wi-Fi Connection
- Topology Module Mapping: Color Coded All System Status Screen (on supported vehicles)
- Relevant Cases: DTC Troubleshooting / Repair Tips Video Library
- Repair Assist: Guided Procedures with DTC Analysis & Fault Code Solutions
- Code-Related Technical Service Bulletins (on select vehicles) / License Plate Reader
- ScanVIN: Barcode or Text Recognition with Camera
- Secure Gateway Access: Authorized FCA SGM Access with AutoAuth Account
- Includes Docking Station, Cables, Scope Connectors, Carrying Case, 1YR Warranty & Software Subscription
- Enhanced Diagnostic Reports: PreSCAN and PostSCAN
- 18000mAh - 8hrs Continuous Use / 16MP Rear Camera & 5MP Front Camera

Ascot No.	Mfg. No.	Description
351-01326	MSULTRA	MAXISYS Ultra Advanced Diagnostic Tablet



351-01326

HEAVY DUTY DIAGNOSTIC TOOLS



MAXISYS MS919 DIAGNOSTIC TABLET

- 9.7" Touchscreen (1536 x 2048) / Android 7.0
- 2.3GHz+1.7GHz Octa-core Processor / 128GB Memory
- Advanced VCI 5-in-1 Device: VCI, Oscilloscope, Multimeter, Waveform Generator, CAN BUS Check
- Oscilloscope Preset Guided & Component Tests / Waveform Library
- New VCI Protocols: D-PDU, DoIP/CAN FD, Mega CAN
- Topology Module Mapping: Color Coded All System Status Screen (on supported vehicles)
- Relevant Cases: DTC Troubleshooting / Repair Tips
- Repair Assist: Guided Procedures with DTC Analysis & Fault Code Solutions
- Code-Related Technical Service Bulletins (on select vehicles) / License Plate Reader
- ScanVIN: Barcode or Text Recognition with Camera
- Secure Gateway Access: Authorized FCA SGM Access with AutoAuth Account
- Includes Cables, Scope Connectors, Carrying Case, 1YR Warranty & Software Subscription
- Enhanced Diagnostic Reports: PreSCAN & PostSCAN
- Dual Wi-Fi Connection
- 15000mAh - 8hrs Continuous Use / 16MP Rear Camera & 5MP Front Camera



351-00919

Ascot No.	Mfg. No.	Description
351-00919	MS919	MAXISYS MS919 Diagnostic Tablet



351-00909

MAXISYS MS909 DIAGNOSTIC TABLET

- 9.7" Touchscreen (1536 x 2048) / Android 7.0
- 2.3GHz+1.7GHz Octa-core Processor / 128GB Memory
- New VCI Protocols: D-PDU, DoIP/CAN FD, Mega CAN
- Topology Module Mapping: Color Coded All System Status Screen (on supported vehicles)
- Relevant Cases: DTC Troubleshooting / Repair Tips
- Repair Assist: Guided Procedures with DTC Analysis & Fault Code Solutions
- Code-Related Technical Service Bulletins (on select vehicles) / License Plate Reader
- ScanVIN: Barcode or Text Recognition with Camera
- Secure Gateway Access: Authorized FCA SGM Access with AutoAuth Account
- Includes Cables, MaxiFlash VCI, Carrying Case, 1YR Warranty & Software Subscription
- Enhanced Diagnostic Reports: PreSCAN & PostSCAN
- 15000mAh - 8hrs Continuous Use / 16MP Rear Camera & 5MP Front Camera

Ascot No.	Mfg. No.	Description
351-00909	MS909	MAXISYS MS909 Diagnostic Tablet

TRUCK SHOP EQUIPMENT



HEAVY DUTY CODE READER KIT

- The perfect tool for technicians that need a fast "Toolbox Tool" to read and clear heavy-duty DTC's, heavy-duty shops that need a second tool in the shop and for their mobile repair trucks, or aftermarket general repair shops that are looking for a cost effective solution for Heavy-Duty Standard coverage

KIT INCLUDES:

- 3 Year Warranty
- HD Reader tool
- 9 Pin Deutsch Cable
- 6 Pin Deutsch Cable
- Operations Manual
- Soft Nylon Carrying Case

Ascot No.	Mfg. No.	Description
351-03418	3418	Heavy Duty Code Reader Kit



351-03418

NEXIQ IQ HD SCAN TOOL

- Pro-Link IQ is designed to help diagnose engine, brake, and transmission failures
- This easy-to-use, advanced tool is engineered to support today's commercial vehicles as well as the more complex vehicles of tomorrow
- Using clear menus and message screens, the Pro-Link IQ guides technicians through the most complicated vehicle tests

Ascot No.	Mfg. No.	Description
351-03110	3110	NEXIQ IQ HD Scan Tool



351-03110

OTC DEF REFRACTOMETER

EPA regulations require all diesel engines manufactured on or after January 1, 2010 to meet lowered NOx emissions standards. Most heavy duty engine (Class 7-8 trucks) manufacturers, have chosen to utilize SCR. This includes Detroit Diesel (DD13, DD15, and DD16 models), Cummins (ISX line), PACCAR, and Volvo/Mack. SCR-equipped engines require the periodic addition of Diesel Exhaust Fluid (DEF, a urea solution) to enable the process. DEF is available in a bottle from most truck stops, and some have installed bulk DEF dispensers near the Diesel Fuel pumps. However, to ensure the proper operation of the SCR system, operators must ensure the DEF in their vehicle consists of a 32.5% Urea / Water solution.

- The OTC 5025 makes this a simple and quick process for an operator or technician.
- **SCALE:** 0.5% line graduations, 32.5% Indicated, Scale 15-40% Waterline & 20 Deg. C

KIT INCLUDES:

- Refractometer
- Dropper
- Lens wipe cloth
- Instructions and quick guide
- Screwdriver and case

Ascot No.	Mfg. No.	Description
335-05025	5025	OTC DEF Refractometer



335-05025





TRUCK SHOP EQUIPMENT



PORTABLE

DIESEL PARTICULATE FILTER (DPF) CLEANER

The Diesel Particulate Filter (DPF) Cleaner was designed with shop service in mind.

- The cleaning process allows the DPF to be cleaned as part of a general maintenance schedule at the service location with minimal time away from the vehicle
- Its portability allows the unit to be placed as close to the vehicle as possible and to be stored wherever needed in the service facility

Ascot No.	Mfg. No.	Description
335-05280	5280	Diesel Particulate Filter (DPF) Cleaner

OTC PORTABLE DIESEL PARTICULATE FILTER CLEANER

The Diesel Particulate Filter (DPF) Cleaner was designed with shop service in mind. Its portability allows the unit to be placed as close to the vehicle as possible and to be stored wherever needed in the service facility. The advent of the 2010 Tier 4 cleaning requirements created the need for a lighter, more portable cleaning system which can be taken into the field to clean filters at the point of service.

- **LIGHTWEIGHT AND HIGHLY PORTABLE:** ideal cleaning system for use in the shop or on a service truck
- **FLEXIBILITY:** Clean DPFs from 6" to 15.5" in diameter using shop or compressed air of at least 100 PSI and 20 CFM sustained airflow
- **FULLY AUTOMATED OPERATION:** Once started, the cleaning process can be completed with minimal operator oversight, freeing up the technician to simultaneously do other work in the shop
- **FOCUSED AIR JET TECHNOLOGY™:** Concentrates a precise high pressure stream of air directly into every cell
- **EASY MAINTENANCE:** Contains no internal filters that require user maintenance
- **RUGGED DESIGN:** Provides maximum durability

Ascot No.	Mfg. No.	Description
335-05286	5286	OTC Portable Diesel Particulate Filter Cleaner

335-05286



HIGHLY PORTABLE

FOCUSED AIR JET



SUPER MUTT TRAILER TESTER

The Super MUTT™ Trailer Tester is a Mobile Diagnostic Trailer Tester that places a load on the trailer's electrical circuits to identify wiring problems while providing remote control operation over both air brakes and lights.

Built to facilitate a one-man testing operation, the Super MUTT™ reduces guesswork and inspection time to prevent failures that lead to expensive road calls and citations.

The remote control allows for repetitive air brake actuation at each axle to reveal developing problems often missed by normal testing procedures.

AIR BRAKE TESTING

- Performs leak down test on service and emergency lines
- Observe slacker adjustment in real time
- Activates air brakes by remote control

REMOTE CONTROL

- One-man testing
- Real-time servo on/off engagement
- Programs multiple remotes; 100 ft. range

ELECTRICAL TESTING

- Pulsar® mode, cross, open, overloaded and shorted circuit indication
- Amperage readout; audible and visible alerts
- 7 way cable testing
- Access ABS blink codes
- Activates lights by remote control

REMOTE CONTROL

MOBILE

Ascot No.	Mfg. No.	Description
356-09008	9008-SE	Super MUTT Trailer Tester



356-09008

WHEEL BEARING LOCKNUT SOCKETS / BOARD



- Wheel bearing locknuts are easy to remove or install with these specially designed sockets
- **HEAVY DUTY:** They're made of high-strength steel and resist rounding out
- **INCLUDED:** 12 wheel bearing locknut sockets with tool board.
- **NOTE:** Sockets are designed for use with 3/4" square-drive manual tools only. Impact tool use voids sockets' warranty

PARTS INCLUDED:

Mfg. No.	Description
1909	Locknut socket (3-1/4" 8 pt.)
1910	Locknut socket (3-1/2" hex)
1913	Locknut socket (3-7/8" 8 pt.)
1914	Locknut socket (4" hex)
1915	Locknut socket (4-1/8" hex)
1921	Locknut socket (2-1/2" hex)
1922	Locknut socket (2-5/8" hex)
1923	Locknut socket (2-3/4" hex)
1928	Locknut socket (2-9/16" hex rounded)
1932	Locknut socket (2-7/8" hex)

Ascot No.	Mfg. No.	Description
314-09852	9852	Wheel Bearing Locknut Sockets / Board



314-09852

UNIVERSAL BEARING CUP INSTALLER

- This handy, adjustable tool is designed to install wheel-bearing cups in a wide range of heavy-duty axles. Simply adjust and lock the jaws to the cup I.D., slip on the new cup, set it in the bore, and drive it in with a hammer
- The tool helps eliminate the damage caused by makeshift methods
- Works on axles from 11,000 to 50,000 lb. capacity.
- Adjusts to fit 3-5/8" to 6-1/2" O.D. bearing cups, which adds up to as many as 30 individual drivers



314-07180

Ascot No.	Mfg. No.	Description
314-07180	7180	Universal Bearing Cup Installer

RECOVERY, RECYCLING & REFRIGERANT SYSTEMS



COOL-TECH 34788NI  
RECOVERY/RECYCLING  
SYSTEM

- Fully automatic operation
- 98.5% recovery • R134a
- IMPROVED CHARGE PERFORMANCE: Exceeds SAE requirements • Graphical display • EXPANDABLE: Capable of additional feature and function add-ons (printer, wireless, refrigerant ID)
- Automatic internal tank fill



361-34788

Ascot No.	Mfg. No.	Description	Shipping Wt.
361-34788	34788NI	Recovery/Recycling System	235 lb.
361-34789	34788NI-H	Hybrid Recovery/Recycling System	222 lb.



ARCTICPRO ACX2280 R1234YF  
REFRIGERANT HANDLING SYSTEM

- Fully automatic • 2-year warranty parts and labor • 7" capacitive color touch screen • 1.8 CFM dual-stage vacuum pump • 30 lb. DOT refrigerant tank • Hybrid capable • Integrated Refrigerant Identifier • WIFI & Bluetooth • Remote diagnostics • Customer report • Wireless Printing
- PHONE APP FOR MIRRORING: iOS & Android-capable database



361-02280

Ascot No.	Mfg. No.	Description
361-02280	ACX2280	ArcticPro ACX2280 R1234YF Refrigerant Handling System

FX3030 DUAL  
REFRIGERANT  
MANAGEMENT SYSTEM

- Certified to meet SAE J3030 for use in R134a and R1234yf systems
- Includes a Refrigerant Identifier

DUAL UNIT HANDLING  
BOTH REFRIGERANT



361-03030

Ascot No.	Mfg. No.	Description
361-03030	FX3030	FX3030 Refrigerant Management System



FLUID EXCHANGERS & FLUSHERS



FLUIDPRO™ ATX  
AUTOMATIC  
TRANSMISSION  
FLUID  
EXCHANGERS

- ADAPTABLE: 'Dipstick' or 'Cooler' mode selector, start engine indicator (ATX-3 only) • ELECTRONIC DIODE ILLUMINATED KEYPAD: Fluid flow direction indicator verifies correct hook-up • TRANSMISSION DIAGNOSTIC PRESSURE GAUGE: For a more effective exchange process • NEW AND USED FLUID SIGHT GLASSES: Improve service accuracy
- AUTOMATIC FLUID LEVEL ADJUSTMENT: +/- 1/2 quarts • DIGITAL WEIGHT SCALE: Technology for accurate fluid exchange • PATENTED BYPASS CIRCUIT: Increased safety for vehicle protection • FAST: Full exchange service times of 2 to 5 minutes and 8 to 14 minutes in 'Dipstick' mode

372-00103



Ascot No.	Mfg. No.	Description
372-00103	ATX-3+ Boost	Fully Automatic Transmission Fluid Exchanger w/ Dipstick Tube Exchange



368-00202

Ascot No.	Mfg. No.	Description
368-00202	PSX-3	Power Steering Fluid Exchanger

FLUIDPRO BFX-3 BRAKE FLUSH SYSTEM

- VERSATILE: Compatible with both ABS & non-ABS brake systems for increased utility • PISTOL WAND: Provides convenience and accurate fill • AUTOMATED PUSH/PULL PROCESS: Allows technicians to multi-task • EASY: Hook-up with three-step process for simple servicing • FAST: Complete service in less than 10 minutes for improved customer satisfaction • PRESSURE GAUGE: Assist in brake system diagnosis • LCD DISPLAY: Indicates when new fluid cylinder is empty and used fluid tank is full
- ADAPTABLE: Universal adapters designed to fit many makes and models of vehicles, enhancing service offerings



368-00201

Ascot No.	Mfg. No.	Description
368-00201	BFX-3	Brake Flush System

FLUIDPRO PSX-3 POWER STEERING FLUID EXCHANGER

- VERSATILE: Multiple power steering fluid capability for increased compatibility
- AUTOMATIC OPERATION: Boosts technician efficiency
- DUAL-PROCESS HOSES: Provides visual insight to new versus used fluid
- DUAL DIAPHRAGM-TYPE PUMPS: Yields service times of 5-15 minutes
- EFFECTIVE: Equipped with 1 GAL. new and 1 GAL. used fluid tanks for complete servicing • COMPACT CART: Designed to occupy less floor space
- CONVENIENT: Also available with ATX+Boost mount for providing automatic transmission fluid and power steering fluid exchange services at the same time



ACCESSORIES



**Balcrank**  
Fluid Dispensing Systems

DEF DRUM PACKAGES

- **Heavy-duty cart** easily rolls and rolls up to 55 gallon drum
- 110 VAC Stainless Steel Electric Diaphragm pump • **LARGE SEMI-PNEUMATIC TIRES:** Allows for easy maneuvering of cart • Large non-marking rear caster with built in brake for safe and secure dispensing • **INCLUDES:** 3' suction hose and 12' dispense hose • Battery powered electronic meter with display • **Dispense nozzle:** Stainless steel automatic shut-off nozzle • **Coupler system to drum is sold separately**

HEAVY  
DUTY  
CART

LARGE  
SEMI-  
PNEUMATIC  
TIRES



Ascot No.	Mfg. No.	Description
329-21250	1210-049P	Portable drum package w/ side mount, 110V electric diaphragm pump, metered auto stainless steel nozzle
329-21251	1210-049	Tote Package w/ side mount, 110V electric diaphragm pump, metered auto stainless steel nozzle

R134A MANIFOLD HOSE KIT

- **R12/R134G gauges, PSI and °F Temp** • ½" ACME bottom ports • Rear R134A and ½" ACME fittings for holding hoses • 90° manual couplers • 72" R134A Hose Set (1/2" ACME x 14mm) • Brass manifold with easy-to-grip handles



Ascot No.	Mfg. No.	Description
366-45111	45111	R134A Manifold Gauge Set with 72" Hose and Couplers

REFRIGERANT CHARGING SCALE

- **Touch Key controls** • **THREE DISPLAY MODES:** lb./oz., decimal lb., kilograms • **VERY HIGH RESOLUTION:** 0.1 oz./0.005 lb./2 grams • Extreme accuracy • 110 lb./50 kg capacity • Auto zero • Compact design, completely portable • *Can be used with all refrigerants* • Removable control box with prop stand/ hanging hook • *Compatible with TIF 9020 for automatic capability*



Ascot No.	Mfg. No.	Description
361-09010	TIF 9010A	Refrigerant Charging Scale

INFRARED THERMOMETER PRO

- **SoC (System-on-a-Chip) Technology:** Complete IR design incorporated on a single chip, creating compact and lightweight design • Innovative optical lens: High accuracy measurements over wide temperature ranges, 10:1 distance to spot (D:S) ratios available • Laser pointer: Simply point at desired target and press the trigger for temperature reading • High and low pass filters with audible alarms for out of range measurements • Temperature modes: Maximum (MAX) • Visual low battery indicators; requires two AAA batteries



Ascot No.	Mfg. No.	Description
369-07610	TIF7610	Infrared Thermometer PRO

CHARGED AIR COOLER TESTER

- The easy way to find air leaks in the charged air cooler systems used on class 7 & 8 truck engines • The tester features a large 2-1/2", 0-60 PSI pressure gauge, regulator and relief valve, and two safety cables • It also has quick disconnect air fittings that attach to a 3", 3-1/2", or 4" cooler hose



Ascot No.	Mfg. No.	Description
366-05039	5039	Charged Air Cooler Tester

www.ascotsupply.com **WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

CEMENTS, SEALANTS & PATCHES



**PREMA-HC**

INDUSTRY STANDARD TRUCK KIT

- Conveniently packaged industry standard repair kits



Ascot No.	Mfg. No.	Description
518-29150	2009150	Industry Standard Truck Kit

PARTS INCLUDED

- PC-2 Combi Repair Units (15)
- PC-3 Combi Repair Units (10)
- PUS-3 Universal Square Patch 3 (20)
- PUS-4 Universal Square Patch 4 (20)
- PCS-2 Stem w/Guide Wire (20)
- PCS-3 Stem w/Guide Wire (20)
- PFC-8 Ultra Fast Dry (8oz)
- PPC-16 Prebuff Cleaner Spray (16oz)
- PLOS-16 Innerliner Overbuff (16oz)
- PCC-2 Carbide Cutter
- PCC-3 Carbide Cutter
- 6068 Adapter for PCC-2
- 6069 Adapter for PCC-3
- PSCS Spiral Cement Tool
- PTS Tire Scraper
- PS-18 Stitcher 1/8"
- PBBR Brass Brush
- PKF Flex Knife
- PWC White Crayon
- PREMA Nailhole Repair Procedures
- PREMA Combi Wall-Poster

**PREMA-HC**

UNIVERSAL BIAS/ RADIAL REPAIRS

- Designed for repairing nail hole injuries in tubeless Bias & Radial injuries in the crown area only • Available in either round or square versions • Installs with Prema Ultra Fast dry Vulcanizing Cement



Ascot No.	Mfg. No.	Description	L (in.)	W (in.)	L (mm)	W (mm)	Dia. (in.)	Dia. (mm)	Qty./ Unit
550-00501	PUR-1	Universal Rd. 1	—	—	—	—	1-1/4	32	100
550-00502	PUR-2	Universal Rd. 2	—	—	—	—	2	51	50
550-00503	PUR-3	Universal Rd. 3	—	—	—	—	3	76	50
550-00522	PUS-2	Universal Sq. 2	1-3/4	1-3/4	44	44	—	—	100
550-00533	PUS-3	Universal Sq. 3	2-1/4	2-1/4	57	57	—	—	100
550-01533	PUS-3 BULK	Universal Sq. 3	2-1/4	2-1/4	57	57	—	—	1000
550-00534	PUS-4	Universal Sq. 3	3	3	76	76	—	—	50

COMBI UNITS AND STEMS

- **Combi repairs can be used for crown injuries only** • *Stems should be used when the angle of the injury is GREATER THAN 25°. Repair with the appropriate two-piece stem and repair unit. Combi units may only be used when the angle of the injury is LESS THAN 25°. If the injury angle is GREATER THAN 25°, repair with the appropriate two-piece stem and repair unit*



Ascot No.	Mfg. No.	Description	Cutter	Injury Size		Qty./ Unit
				(in.)	(mm)	
582-00501	PC-1	Combi 1	PCC-1	1/8"	3	40
582-00502	PC-2	Combi 2	PCC-2	1/4"	6	15
582-00503	PC-3	Combi 3	PCC-3	5/16"	8	10
582-00504	PC-4	Combi 4	PCC-4	3/8"	10	10
582-00522	PCS-2	Stem 2 w/Guide Wire	PCC-2	1/4"	6	20
582-00533	PCS-3	Stem 3 w/Guide Wire	PCC-3	5/16"	8	20
582-00544	PCS-4	Stem 4 w/Guide Wire	PCC-4	3/8"	10	20

**WARNING** For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).

www.ascotsupply.com

PREMA<sup>HC</sup>

CEMENTS, SEALANTS & PATCHES



ULTRA FAST DRY VULCANIZING CEMENT

- Formulated to provide outstanding performance when used in conjunction with PREMATAK materials
- Contains no ozone depleting chemicals



Ascot No.	Mfg. No.	Description	Fl. Oz.	ML	Qty./Box
501-00508	PFC-8	Vulcanizing Cement	8	237	10
501-00532	PFC-32	Vulcanizing Cement	32	946	10
501-00519	PIV-9FT	Insert Cement, Flip Top (Flammable)	9	266	12

BEAD SEALER



Ascot No.	Mfg. No.	Description	Fl. Oz.	ML	Qty./Box
504-00132	PBS-32	Bead Sealer Spread-On (Flammable)	32	946	10
504-01132	PBSO-32	Bead Sealer Paint-On (Flammable)	32	946	10

PRE-BUFF CLEANER

- Formulated to remove contaminants (such as silicone and mold lubricants) from the innerliner of the tire prior to buffing
- Available in either liquid or aerosol
- Contains no ozone depleting chemicals



Ascot No.	Mfg. No.	Description	Fl. Oz.	ML	Qty./Box
505-00516	PPC-16	Pre-Buff Cleaner "Aerosol" (Flammable)	16	473	12
505-00532	PPC-32	Pre-Buff Cleaner (Flammable)	32	946	10

INNERLINER OVERBUFF SEALANT

- Designed to restore air retention qualities to the buffed innerliner around the repair after installations
- Can be used in both COLD and HOT vulcanizing systems
- Contains no ozone depleting chemicals



Ascot No.	Mfg. No.	Description	Fl. Oz.	ML	Qty./Box
505-05320	PLOS-16	Innerliner Overbuff Sealant	16	473	10











CEMENTS, SEALANTS & PATCHES



CHEMICALS & CEMENTS

- Cement is fast drying • Wide brush for easy application



504-90005



501-90132



504-90011



504-90016

505-90132

Ascot No.	Mfg. No.	Description	Qty./Box
501-90018	ASV8	Clear Chemical Vulcanizing Cement, 8 oz.	24
501-90132	ASV32BL	Blue Chemical Vulcanizing Cement, Quart	6
504-90005	ABS5 G	Black Bead Sealer, 5-Gallon	—
504-90011	ABS5 G	Black Bead Sealer, Gallon	4
504-90016	ARS16BK	Black Inner Liner Sealer, 16 oz.	12
505-90008	ARS8	Gray Inner Liner Sealer, 8 oz.	24
505-90032	ABU32	Inner Liner Cleaner, Quart	12
505-90132	ARS32	Gray inner liner sealer, Quart	6

LEAD WIRE PULL THROUGH PATCH/PLUG

- Easiest and most popular method to fill a nailhole and apply a patch in one simple step
- Lead-wire guides the rubber stem through injury • Stem coated with self vulcanizing material and patch features Versacure bonding gum • For tread area of bias and radial passenger and truck tires



Ascot No.	Description	Qty./Box
587-01303	1/8" Stem Lead Wire Pull Through Patch/Plug	48
587-01306	1/4" Stem Lead Wire Pull Through Patch/Plug	24
587-01309	3/8" Stem Lead Wire Pull Through Patch/Plug	24
587-01406	1/4" Plug-N-Patch: Grey Cushion Gum, Blue Wrap	24
587-01409	3/8" Plug-N-Patch: Grey Cushion Gum, Blue Wrap	24

BIAS HEAVY DUTY UNITS

- ASB series is a cord reinforced soft gum repair
- ACB series is a cord reinforced repair with hard blue gum
- Repair with chemical vulcanizing cement

Ascot No.	Mfg. No.	Description
564-90012	ASB2	Bias Heavy Duty: 2-7/8" (20 per box)
564-90013	ASB3	Bias Heavy Duty: 4-5/8" (10 per box)
564-90014	ASB4	Bias Heavy Duty: 5-3/8" (10 per box)
564-90015	ASB5	Bias Heavy Duty: 7-1/8" (10 per box)
564-90016	ASB6	Bias Heavy Duty: 10" (10 per box)
564-90022	ACB2HD	Bias Heavy Duty: 2-7/8" (20 per box)
564-90011	ACB1HD	Bias Heavy Duty: 2-1/2" (20 per box)



564-90012

564-90013

564-90014



BROWN, 12 STRAND TIRE REPAIR INSERT W/ BLUE PAPER BACKING

- 8" brown • Made in the USA • Extended shelf life
- No leaks • 3rd party testing
- EPA approved • Durable cord body • 100% butyl saturation • 6 repairs per packet • 5 packets per box



Ascot No.	Mfg. No.	Description
571-91964	ATS1964	4" Brown, 12 Strand Tire Repair Insert w/ Blue Paper Backing
571-91968	ATS1968	8" Brown, 12 Strand Tire Repair Insert w/ Blue Paper Backing

HEAVY DUTY 8" REPAIR INSERT KIT

- For use on the wheel • Everything needed to make temporary, emergency repairs to most flat tires caused by nails or other objects up to 1/4" • KIT INCLUDES: (30) 8" temporary inserts, metal t-handle insertion tool, metal t-handle probe, lubricant, cutting blade, Allen wrench and instructions
- Blow molded case for easy storage



518-90030

Ascot No.	Mfg. No.	Description
518-90030	ATS30K-HD	Heavy Duty 8" Repair Insert Kit - 30 Repairs

METAL T-HANDLE TRUCK INSERTION TOOL

- All metal construction • Ergonomically designed • Inserts temporary tire repairs with ease • Includes 5-1/2" replacement needle that can easily be changed



537-90144

Ascot No.	Mfg. No.	Description
537-90144	TTT	Metal T-Handle Truck Insertion Tool
537-90155	AWRN55	5-1/2" Replacement Insertion Needle



Ascot Supply Corp. does not recommend "temporary" tire repairs. All repairs should perform the function of filling or replacing the injured section as recommended by the RMA and other industry associations.

SAFETY SEAL® TRUCK TIRE REPAIR KIT

- Includes everything to make temporary repairs to most flats caused by nails or other objects up to 1/4" • KIT INCLUDES: 30-8" (20cm) temporary repairs, Metal T-handle insertion tool, Metal T-handle spiral probe, Special lube, Extra insertion needle, Cutting blades, Allen wrench, and Instructions
- Packed in a sturdy carrying case to fit easily under the seat of a truck



571-22926

Ascot No.	Mfg. No.	Description
571-22926	SSKTP	Truck Tire Repair Kit

SAFETY SEAL® TRUCK TIRE REPAIR REFILLS

- 24 plies of a custom made high tensile (350 lb break strength) chemical resistant nylon yarn • Each yarn is immersed in proprietary rubber sealant system (250% rubber to yarn) • Patented manufacturing process assures the final Safety Seal® repair has an equal amount of rubber sealant (250% rubber to yarn) throughout the Safety Seal® Repair • INCLUDES: 30 8" (20cm) refill repairs per kit



585-30820

Ascot No.	Mfg. No.	Description
585-30820	SSRT	Truck Tire Repair Refills - 30 8" (20 cm) Repairs

VULCANIZED TUBELESS TIRE REPAIR SEALS

- For emergency repair use only • String repairs are not designed to be used in lieu of a permanent repair • Repair a punctured tire in a matter of minutes • Made from high-strength yarn and butyl rubber



585-60541

Ascot No.	Mfg. No.	Description	Qty./Box
538-60541	1012060TS4TS	4" Orange String Repair	60
585-30581	1012030TS8TS	8" Orange String Repair	30
585-10071	1058100PD7AS	8" Thin Black String Repair	100



CABINETS



HEAVY DUTY TIRE REPAIR CABINET

- Features sliding storage drawers with rollers.
- SIZE: 19.6" x 10" x 26"
  - 2 shelves inside (3 storage levels)
  - 2 tool hook sets on two inside doors
  - 2 sliding storage drawers with rollers
  - Switch-to-open handle
  - Optional shelf available
  - WEIGHT: 36 lbs.

Ascot No.	Mfg. No.	Description
719-12001	TBG-WC12001	Heavy Duty Tire Repair Cabinet
719-12011	TBG-WC12001-01	Optional Shelf for Tire Repair Cabinet



719-12001

18-DRAWER METAL STORAGE CABINET

- CABINET SIZE: 33-3/4" (W) x 11-3/4" (D) x 10-3/4" (H)
- DRAWER SIZE: 4-7/8" (W) x 11-1/4" (D) x 2-3/4" (H)
- Modular drawer design for efficiency and organization
- Heavy-duty, welded steel construction provides strength and stability
- Drawers feature stoppers to prevent accidental pulling or spilling
- Full-width handles and easy glide runners
- Shipped fully assembled and ready to use
- WEIGHT: 45 lbs.

Ascot No.	Mfg. No.	Description
719-00018	18D	18-Drawer Metal Storage Cabinet



719-00018

32-BIN METAL STORAGE CABINET

- CABINET SIZE: 33-3/4" (W) x 8-1/2" (D) x 19-1/4" (H)
- DRAWER SIZE: 4" (W) x 8-3/8" (D) x 4-1/2" (H)
- Keeps your tools and accessories organized and accessible
- Heavy-duty, welded steel construction provides strength and stability
- Hemmed bin fronts for retaining parts
- Mounting holes located in the top and bottom
- Shipped fully assembled and ready to use
- WEIGHT: 37 lbs.

Ascot No.	Mfg. No.	Description
719-00032	32B	32-Bin Metal Storage Cabinet



719-00032

\*Actual product appearance may vary.

AIR BUFFERS & DRILLS



HIGH-SPEED TIRE BUFFER WITH QUICK CHANGE CHUCK

- Equipped with a quick change chuck to allow for rapid changes to a variety of tire repair tasks
- APPLICATIONS: Ideal for scuffing, grinding, cleaning and many other uses requiring high speed and is equipped with safety throttle lever
- Includes one quick-change adapter • FREE SPEED: 20,000 RPM • MADE IN USA



157-06010

Ascot No.	Mfg. No.	Description
157-06010	SLP-6010	High-Speed Tire Buffer with Quick Change Chuck
157-16010	SLP-6010REK	Above with Rear Exhaust Hose Kit

HIGH SPEED TIRE BUFFER KIT

- Jacobs chuck for holding buffing accessories • Lock-off throttle • APPLICATIONS: Tire patchwork, roughing areas for recapping and cleaning tire moldings • FREE SPEED: 20,000 RPM • MADE IN USA



157-04038

Ascot No.	Mfg. No.	Description
157-04038	SLP-4038	High-Speed Tire Buffer with Jacob's Chuck
157-14038	SLP-4038REK	Above with Rear Exhaust Hose Kit

HEAVY DUTY SKIVING TOOL

- APPLICATIONS: Excellent for skiving work due to the more substantial gear package which contributes to durability
- FREE SPEED: 2,800 RPM • Rear exhaust performance • Equipped with safety throttle lever
- Includes one quick-change adapter • MADE IN USA



157-06550

Ascot No.	Mfg. No.	Description
157-06550	SLP-6550	Heavy Duty Skiving Tool
157-16550	SLP-6550REK	Above with Rear Exhaust Hose Kit

LOW-SPEED TIRE BUFFER WITH QUICK CHANGE CHUCK

- FREE SPEED: 2,800 RPM
- 90 PSI Required air pressure
- 1/4"NPT. Air Inlet • 3/8" required hose size • WEIGHT: 2.25 lb. • 8.5" in length • Quick change chuck for fast change of buffing accessories



157-06510

Ascot No.	Mfg. No.	Description
157-06510	SLP-6510	Low-speed Tire Buffer with Quick Change Chuck
157-16510	SLP-6510REK	Above with Rear Exhaust Hose Kit

LOW SPEED TIRE BUFFER WITH QUICK CHANGE SLIP CHUCK

- Brass bushings provide performance and durability in tough working conditions
- Includes whip hose and exhaust hose • Quick change slip chuck for fast and easy change of buffing wheel • Built-in regulator • Lock off throttle to prevent accidental start ups • Rear exhaust directs air away from the work area
- APPLICATIONS: Ideal for patchwork, roughing areas for recapping and cleaning tire moldings
- Overhose Kit also Available Separately (175-00873)



158-10873

Ascot No.	Mfg. No.	Description
158-10873	A873K	Low Speed Tire Buffer with Quick Change Slip Chuck

HIGH SPEED BUFFER KIT WITH QUICK CHANGE CHUCK

- Quick change chuck for holding buffing accessories
- Lock-off throttle • FREE SPEED: 22,000 RPM
- APPLICATIONS: Tire patchwork, roughing areas for recapping and cleaning tire moldings • Includes overhose kit



158-11871

Ascot No.	Mfg. No.	Description
158-11871	A871K-QC	High Speed Buffer Kit with Quick Change Chuck





AIR BUFFERS & DRILLS



HIGH SPEED TIRE BUFFER WITH OVERHOSE KIT

• Jacobs chuck for holding buffing accessories • Lock-off throttle • **FREE SPEED:** 22,000 RPM • **APPLICATIONS:** Tire patchwork, roughing areas for recapping and cleaning tire moldings • Includes overhose kit



158-10871

Ascot No.	Mfg. No.	Description
158-10871	A871K	High Speed Tire Buffer with Overhose Kit

LIGHTED LOW-SPEED BUFFER WITH QUICK-CHANGE CHUCK

• Provides light inside the tire without the use of batteries or other external power sources • Volt-Aire patented technology turns the motor into a working generator to bring electricity and light to the work surface for enhanced visibility, safety and productivity • Geared design provides high torque but low speed to prevent burning of work surface • Quick-change chuck allows operator to make rapid changes to a variety of tool accessories • **MADE IN USA**



157-06520

Ascot No.	Mfg. No.	Description
157-06520	SLP-6520L	Lighted Low-Speed Tire Buffer with Quick Change Chuck
157-16520	SLP-6520REK	Above with Rear Exhaust Hose Kit



HEAVY DUTY AIR LOW SPEED TIRE BUFFER

• **APPLICATIONS:** For quick work of patchwork and roughing up low areas for recapping, tire scuffing and cleaning tire moldings • Free speed up to 3,000 RPM • 1/2 HP motor



157-01327

Ascot No.	Mfg. No.	Description
157-01327	IR-527LS	Heavy Duty Air Low Speed Tire Buffer - Includes Over Hose



HIGH-SPEED TIRE BUFFER WITH JACOBS CHUCK

• Provides plenty of power with it's .5 horsepower motor and 22,000 RPM, rear exhaust performance • **APPLICATIONS:** Ideal for patchwork, roughing areas for recapping and cleaning tire moldings • Equipped with safety throttle lever



158-00871

Ascot No.	Mfg. No.	Description
158-00871	CP-871K	High-Speed Tire Buffer with Jacobs Chuck - Includes Over Hose

LOW SPEED TIRE BUFFER KIT

• Quick change slip chuck for fast and easy change of buffing wheel • Adjustable speed regulator for precise control • Lock-off throttle to prevent accidental start ups • Rear exhaust directs air away from work area • **FREE SPEED:** 2,800 RPM



158-00873

Ascot No.	Mfg. No.	Description
158-00873	CP-873K	Low Speed Tire Buffer Kit - Includes Over Hose



TIRE REPAIR TOOLS & ACCESSORIES



RPG AIR POWERED TIRE REPAIR VACUUM

• Quick change from blow to vacuum function • **KIT INCLUDES:** Plastic body gun, dust bag, 2 extension tubes, shop brush, flat tube, tiny tube



537-00003

BLOW/  
VACUUM  
FUNCTIONS

Ascot No.	Mfg. No.	Description
537-00003	VBG2	RPG Air Powered Tire Repair Vacuum

TIRE REPAIR AIR TOOL ACCESSORIES

Ascot No.	Mfg. No.	Description
173-00018	QC18	Quick Chuck Adapter W/ Collar
173-00019	QC19	Quick Chuck Adapter W/ Spacer 1" x 3/8" Thread
173-00020	QC20	Quick Chuck Adapter For 1/8" Shank
173-00022	QC22	Quick Chuck Adapter For 1/4" Shank
173-00023	QC23	Quick Chuck Adapter For 5/16" Shank
173-09150	SLP-9150	Jacobs 3/8" Precision Chuck and Key
173-09165	SLP-9165	Quick Change Chuck - 3/8"-24 Mounting Thread
173-09166	SLP-9166	Quick Change Chuck - 1/2"-13 Mounting Thread
173-09167	SLP-9167	Quick Change Chuck - 1/2"-20 Mounting Thread
173-09201	SLP-9201	1-11/16" x 3/8"-24 Chuck Adapter w/Washer & Nut
173-09202	SLP-9202	2-3/4" x 3/8"-24 Chuck Adapter w/Nut & Wheel Spacer
173-09211	SLP-9211	1-7/8" x 3/8"-24 Threaded Adapter w/Washer & Nut
173-09212	SLP-9212	2-1/4" x 3/8"-24 Threaded w/ Nut & Wheel Spacer
173-09213	SLP-9213	1-15/16" Adapter w/Set Screw for 1/8" Shank
173-09214	SLP-9214	1-15/16" Adapter w/Set Screw for 3/16" Shank
173-09215	SLP-9215	1-15/16" Adapter w/Set Screw for 1/4" Shank
173-09216	SLP-9216	1-15/16" Adapter w/Set Screw for 5/16" Shank
173-09400	SLP-9400	Overhose Kit



TIRE REPAIR TOOLS & ACCESSORIES



MISCELLANEOUS TIRE REPAIR TOOLS



Ascot No.	Mfg. No.	Description	Ascot No.	Mfg. No.	Description	Ascot No.	Mfg. No.	Description
537-90002	SEPG	Plastic Pistol Grip Handle - Short end load	537-90009	SPPG	Plastic Pistol Grip Handle Spiral Probe	537-90119	PRBR	Replacement Spiral Probe
537-90003	OETT	Plastic T-Handle w/ 3-1/2" needle - end load	537-90019	TSPRB	Chrome Plated T-Handle Spiral Probe	537-90150	P150	Heavy Duty Screwdriver-Type Handle Barbed Rasp
537-90005	OE11	Heavy Duty Screwdriver-Type Handle-11"	537-90035	WRN35	Replacement Needle: 3-1/2" - end load	537-90200	TSBRP	Chrome Plated T-Handle with Barbed Rasp
537-90006	TST	Chrome Plated T-Handle with 3" Replaceable Needle - end load	537-90045	WRN45	Replacement Needle: 4-1/2" - end load	537-90201	PPG	Plastic Pistol Grip Handle Barbed Rasp



TIRE REPAIR KNIVES

• Rubber must be cleaned and hole injuries must be cleaned and roughened before inserting repair units



Ascot No.	Mfg. No.	Description	Blade Length	Qty./Box
531-60570	X751N	High carbon steel, hawk bill notch, glaze finish, round burnt finish handle (riveted)	2" / 51mm	12
531-75190	X2T	High carbon steel, taper point, glaze finish, round burnt finish handle (riveted)	4" / 102mm	12
537-75310	X3N	High carbon steel, round point, thin skiver, glaze finish, round burnt finish handle	4-7/8" / 124mm	12
531-75200	X1S	High carbon steel, square point, glaze finish, round burnt finish handle (riveted)	2-1/2" / 64mm	12
531-75170	X2S	High carbon steel, square point, glaze finish, round burnt finish handle (riveted)	3" / 76mm	12
531-75330	X3S	High carbon steel, square point, glaze finish, round burnt finish handle (riveted)	3-5/8" / 93mm	12
531-75370	X4S	High carbon steel, square point, glaze finish, round burnt finish handle (riveted)	3-7/8" / 99mm	12
531-75440	X5S	High carbon steel, square point, glaze finish, round burnt finish handle (riveted)	4-1/4" / 108mm	12

RUBBER KNIFE


• High carbon steel, square point, glaze finish, round burnt finish handle (riveted)



Ascot No.	Mfg. No.	Description	Blade Length	Qty./Box
531-60070	X4x1S	High carbon steel, square point, glaze finish, round burnt finish handle (riveted)	4" x 1" / 102 x 26mm	12
531-60090	X5x1S	High carbon steel, square point, glaze finish, round burnt finish handle (riveted)	5" x 1" / 127 x 26mm	12
531-60130	X6x1S	High carbon steel, square point, glaze finish, round burnt finish handle (riveted)	6" x 1" / 152 x 26mm	12
531-60150	X8x11/8S	High carbon steel, square point, glaze finish, round burnt finish handle (riveted)	8" x 1-1/8" / 203 x 29mm	12
531-60170	X10x11/4S	High carbon steel, square point, glaze finish, round burnt finish handle (riveted)	10" x 1-1/4" / 254 x 32mm	12

FLEXIBLE TIRE REPAIR KNIFE

• High carbon steel, round point skiver, glaze finish, round burnt finish handle (riveted)

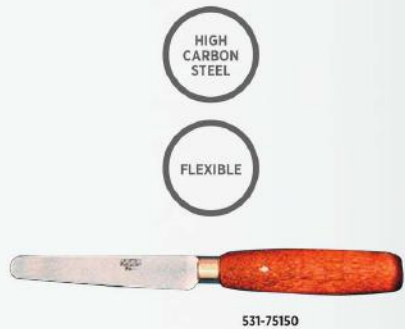

Ascot No.	Mfg. No.	Description	Blade Length	Qty./Box
531-75150	X2RF	High carbon steel, round point skiver, glaze finish, round burnt finish handle (riveted)	4" / 102mm	12

SKIVING KNIFE



Ascot No.	Mfg. No.	Description
531-70030	70030	4-1/2" Handle for X2 Blades
531-71050	71050	10 Replacement blades

OTHER KNIVES

Ascot No.	Mfg. No.	Description
531-60300	60300	4" x 1" Curved Notch Repair Knife
531-60310	60310	6" x 1-1/2" S-Notch Trim Knife
531-75220	75220	3/8" Curved Point Shoe Knife
531-75310	X3N	4-7/8" Round Point Skiving Knife





SLOTTED FINISHING RASPS



LARGE VARIETY OF SHAPES & SIZES

DURABLE & EFFICIENT

Ascot No.	Mfg. No.	Grit	Description
539-02203	2203	36-Grit	2" x 3/16" Slotted Finishing Rasp
539-02204	2204	36-Grit	2" x 3/16" Slotted Finishing Rasp
539-02205	2205	16-Grit	2" x 3/8" Slotted Finishing Rasp
539-02206	2206	16-Grit	2" x 3/8" Slotted Finishing Rasp
539-02207	2207	36-Grit	2" x 1/2" Slotted Finishing Rasp
539-02208	2208	16-Grit	2" x 1/2" Slotted Finishing Rasp
539-02209	2209	36-Grit	2" x 3/4" Slotted Finishing Rasp
539-02210	2210	16-Grit	2" x 3/4" Slotted Finishing Rasp
539-02241	2241	36-Grit	2" x 1" Slotted Finishing Rasp

B&J NON-REGRITTABLE COPPER CONTOUR WHEELS

• The B&J Contour Wheels have a convex contour, which has proven to be particularly suitable for repairs inside the tire • Smaller models are almost completely covered with grit on their surface, so they can be used at any angle • Also ideal for sidewall machining • The variety of grain sizes available provides an optimum surface for every application



Ascot No.	Mfg. No.	Grit	Description
539-10116	332001-16	16 Grit	2" x 1" Copper Contour Wheel (50 x 25mm) AH 3/8"
539-10123	332001-23	23 Grit	2" x 1" Copper Contour Wheel (50 x 25mm) AH 3/8"
539-10136	332001-36	36 Grit	2" x 1" Copper Contour Wheel (50 x 25mm) AH 3/8"
539-10160	332001-60	60 Grit	2" x 1" Copper Contour Wheel (50 x 25mm) AH 3/8"
539-11016	332010-16	16 Grit	3" x 1" Copper Contour Wheel (76 x 25mm) AH 3/8"
539-11023	332010-23	23 Grit	3" x 1" Copper Contour Wheel (76 x 25mm) AH 3/8"
539-11036	332010-36	36 Grit	3" x 1" Copper Contour Wheel (76 x 25mm) AH 3/8"
539-11060	332010-60	60 Grit	3" x 1" Copper Contour Wheel (76 x 25mm) AH 3/8"
539-10916	332009-16	16 Grit	3" x 1.5" Copper Contour Wheel (76 x 38mm) AH 3/8"
539-10923	332009-23	23 Grit	3" x 1.5" Copper Contour Wheel (76 x 38mm) AH 3/8"
539-10936	332009-36	36 Grit	3" x 1.5" Copper Contour Wheel (76 x 38mm) AH 3/8"
539-10960	332009-60	60 Grit	3" x 1.5" Copper Contour Wheel (76 x 38mm) AH 3/8"
539-10416	332004-16	16 Grit	4" x 1.5" Copper Contour Wheel (102 x 38mm) AH 3/8"
539-10423	332004-23	23 Grit	4" x 1.5" Copper Contour Wheel (102 x 38mm) AH 3/8"
539-10436	332004-36	36 Grit	4" x 1.5" Copper Contour Wheel (102 x 38mm) AH 3/8"
539-10460	332004-60	60 Grit	4" x 1.5" Copper Contour Wheel (102 x 38mm) AH 3/8"

TIRE REPAIR TOOLS & ACCESSORIES



CONTOUR CUP RASPS



LARGE VARIETY OF SHAPES & SIZES

DURABLE & EFFICIENT

Ascot No.	Mfg. No.	Grit	Description
539-06261	TCW210	36-Grit	2"x 1-3/8" - 3/8" Arbor Hole
539-06260	TCW210	16-Grit	2"x 1-3/8" - 3/8" Arbor Hole
539-06360	TCW310	36-Grit	3" x 1" - 3/8" Arbor Hole
539-06361	TCW310	16-Grit	3" x 1" - 3/8" Arbor Hole
539-06310	TCW315	36-Grit	3" x 1-1/2" - 3/8" Arbor Hole
539-06311	TCW315	16-Grit	3" x 1-1/2" - 3/8" Arbor Hole
539-06312	TCW315	36-Grit	3" x 1-1/2" - 1/2" Arbor Hole
539-06313	TCW315	16-Grit	3" x 1-1/2" - 1/2" Arbor Hole
539-06314	TCW315	36-Grit	3" x 1-1/2" Vented - 3/8" Arbor Hole
539-06315	TCW315	16-Grit	3" x 1-1/2" Vented - 3/8" Arbor Hole
539-06316	TCW315	36-Grit	3" x 1-1/2" Vented - 1/2" Arbor Hole
539-06317	TCW315	16-Grit	3" x 1-1/2" Vented - 1/2" Arbor Hole
539-06410	TCW415	36-Grit	4" x 1-1/2" - 1/2" Arbor Hole
539-06411	TCW415	16-Grit	4" x 1-1/2" - 1/2" Arbor Hole
539-06412	TCW415	36-Grit	4" x 1-1/2" - 5/8" Arbor Hole
539-06413	TCW415	16-Grit	4" x 1-1/2" - 5/8" Arbor Hole
539-06414	TCW415	36-Grit	4" x 1-1/2" Vented - 1/2" Arbor Hole
539-06415	TCW415	16-Grit	4" x 1-1/2" Vented - 1/2" Arbor Hole
539-06416	TCW415	36-Grit	4" x 1-1/2" Vented - 5/8" Arbor Hole
539-06417	TCW415	16-Grit	4" x 1-1/2" Vented - 5/8" Arbor Hole

B&J NON-REGRITTABLE COPPER BUFFOUT WHEELS

• Buffout Tools are ideal for all types of tire repairs • With a variety of sizes and shapes repairs can be carried out quickly and effectively • Due to the narrow tool width of 3 mm and more, the area to be repaired remains as small as necessary and saves unnecessary filling material afterwards • The special design makes the tools durable and efficient



Ascot No.	Mfg. No.	Grit	Description
539-15616	332056-16	16-Grit	Flat Faced Buffout Wheel 2" x 3/16" (50 x 5mm)
539-15636	332056-36	36-Grit	Flat Faced Buffout Wheel 2" x 3/16" (50 x 5mm)
539-15816	332058-16	16-Grit	Flat Faced Buffout Wheel 2" x 1/4" (50 x 7mm)
539-15836	332058-36	36-Grit	Flat Faced Buffout Wheel 2" x 1/4" (50 x 7mm)
539-16316	332063-16	16-Grit	Flat Faced Buffout Wheel 2" x 3/8" (50 x 10mm)
539-16336	332063-36	36-Grit	Flat Faced Buffout Wheel 2" x 3/8" (50 x 10mm)
539-16416	332064-16	16-Grit	Round Faced Buffout Wheel 2" x 1/2" (50 x 13mm)
539-16436	332064-36	36-Grit	Round Faced Buffout Wheel 2" x 1/2" (50 x 13mm)
539-16516	332065-16	16-Grit	Round Faced Buffout Wheel 2" x 3/4" (50 x 19mm)
539-16536	332065-36	36-Grit	Round Faced Buffout Wheel 2" x 3/4" (50 x 19mm)

B & J AIRBOT BUFFOUT WHEELS

• The new AIRBOT® series not only look aggressive, they also work aggressively • With their open design and the angled setup they are much more efficient in getting the job done than any predecessors • Improved cooling • Rounder buffing profile • Longer lifetime • Faster grinding cycles



Ascot No.	Mfg. No.	Description
539-18516	132185-16	RFBOT AIRBOT Ø2"x 3/16", AH 3/8", Grit 16 Buffout Wheel
539-18536	132185-36	RFBOT AIRBOT Ø2"x 3/16", AH 3/8", Grit 36 Buffout Wheel
539-18616	132186-16	RFBOT AIRBOT Ø2"x 1/4", AH 3/8", Grit 16 Buffout Wheel
539-18636	132186-36	RFBOT AIRBOT Ø2"x 1/4", AH 3/8", Grit 36 Buffout Wheel
539-18716	132187-16	RFBOT AIRBOT Ø2"x 3/8", AH 3/8", Grit 16 Buffout Wheel
539-18736	132187-36	RFBOT AIRBOT Ø2"x 3/8", AH 3/8", Grit 36 Buffout Wheel
539-18816	132188-16	RFBOT AIRBOT Ø2"x 1/2", AH 3/8", Grit 16 Buffout Wheel
539-18836	132188-36	RFBOT AIRBOT Ø2"x 1/2", AH 3/8", Grit 36 Buffout Wheel
539-18416	132184-16	RFBOT AIRBOT Ø4"x 1/2", AH 1/2", Grit 16 Buffout Wheel
539-18436	132184-36	RFBOT AIRBOT Ø4"x 1/2", AH 1/2", Grit 36 Buffout Wheel
539-15516	132155-16	RFBOT AIRBOT Ø6"x 1/2", AH 1/2", Grit 16 Buffout Wheel
539-15536	132155-36	RFBOT AIRBOT Ø6"x 1/2", AH 1/2", Grit 36 Buffout Wheel

B & J HD BUFFOUT WHEELS

• Improved durability • Aggressive and efficient • Longer lifetime than conventional "16-grit" carbides



Ascot No.	Mfg. No.	Description
539-32056	332056-HD	2" x 3/16" RFBOT HD Buffout Wheel
539-32058	332058-HD	2" x 1/4" RFBOT HD Buffout Wheel
539-32063	332063-HD	2" x 3/8" RFBOT HD Buffout Wheel
539-32064	332064-HD	2" x 1/2" RFBOT HD Buffout Wheel
539-32065	332065-HD	2" x 3/4" RFBOT HD Buffout Wheel
539-33010	332010-HD	3" x 1" Contour Wheel HD Grit 3/8" AH
539-33009	332009-HD	3" x 1.5" Contour Wheel HD Grit 3/8" AH
539-33004	332004-HD	4" x 1.5" Contour Wheel HD Grit 3/8" AH
539-33017	332017-HD	4" x 1.5" Contour Wheel HD Grit 1/2" AH





TIRE REPAIR TOOLS & ACCESSORIES



FLARED CONTOUR WHEELS

The unique profile of the Flared Contour Wheels properly matches the shape of the tire.

- Provides wide, level contact with surface
- Efficient use of the entire tool • Easier to use - less operator fatigue • Reduced buffing time



Ascot No.	Mfg. No.	Description
538-10000	RH100	1-3/4" Contour Wheel, 3/8" Bore, SSG 170
538-10200	RH102	1-3/4" Contour Wheel, 3/8" Bore, SSG 230
538-13017	RH130-170	2" Contour Wheel, 3/8" Bore, SSG 170
538-13023	RH130-230	2" Contour Wheel, 3/8" Bore, SSG 230
538-10700	RH107	2-1/2" Contour Wheel, 3/8" Bore, SSG 170
538-10900	RH109	2-1/2" Contour Wheel, 3/8" Bore, SSG 230
538-11100	RH111	2-1/2" Contour Wheel, 3/8" Bore, SSG 390
538-11200	RH112	3" Contour Wheel, 3/8" Bore, SSG 170
538-11400	RH114	3" Contour Wheel, 3/8" Bore, SSG 230
538-11600	RH116	3" Contour Wheel, 3/8" Bore, SSG 390
538-11800	RH118	3-1/2" Contour Wheel, 3/8" Bore, SSG 170
538-12000	RH120	3-1/2" Contour Wheel, 3/8" Bore, SSG 230
538-12200	RH122	3-1/2" Contour Wheel, 3/8" Bore, SSG 390

\* Designed to fit the Bandag pre-8400 series buffers

B & J SUPER PATRIOT CONTOUR WHEEL

- Super Patriot's patented design is significantly efficient since cooling is achieved throughout the entire working surface of the tool due to the concave/convex base design
- Customers' feedback after using the Patriot carbides is based on the products significantly longer life vs. conventional carbides



Ascot No.	Mfg. No.	Description
539-28646	133286-460	3" X 1-1/4" CWSP 460 grit 3/8" AH

POLYPLUGS FOR FLARED CONTOUR WHEELS

- Easily fits inside the contour wheel • Compensates for mounting inaccuracies • Reduces vibration for smoother, quieter, more comfortable operation • Reusable!



Ascot No.	Mfg. No.	Description
538-15000	RH150	1-3/4" PolyPlug
538-15100	RH151	2" PolyPlug
538-15200	RH152	2-1/2" PolyPlug
538-15400	RH154	3" PolyPlug
538-15600	RH156	3-1/2" PolyPlug


ECONOMY FLARED CONTOUR WHEEL

- Proven Rubberhog shape • Uses the Standard Grit coating for an economical solution • Reduced aggressiveness for the less experienced user • Much safer than black stones!



Ascot No.	Mfg. No.	Description
538-13000	RH130	2" Contour Wheel, 3/8" Bore, 60 Grit

CARBIDE CUTTING TOOLS

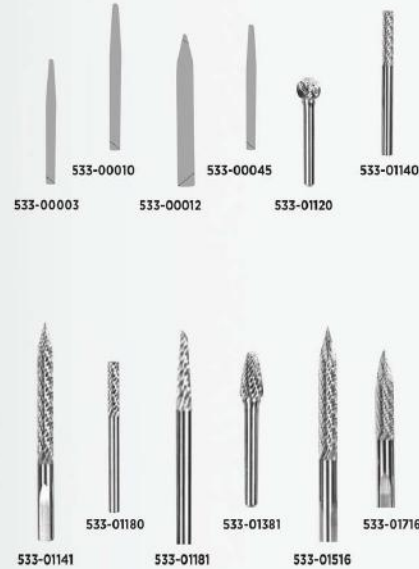

Ascot No.	Mfg. No.	Description
533-00003	CB3	1/8" (3mm) Pointed End
533-00010	CB10	3/8" (10mm) Pointed End
533-00012	CB12	1/2" (12mm) Pointed End
533-00045	CB4.5	1/8" (4.5mm) Pointed End
533-01120	BU12B	1/2" Ball Burr
533-01140	BU14R	1/4" Router Burr
533-01141	BU14TR	1/4" Long Taper Burr
533-01180	BU18R	1/8" Router Burr
533-01181	BU18T	1/8" Taper Burr
533-01182	BU18TL	1/8" Taper Burr, 3" Overall Length
533-01381	BU18T	3/8" Tree Burr
533-01516	BU516NR	5/16" Long Taper Burr
533-01716	BU716N	7/16" Long Taper Burr
533-01732	BU732N	7/32" Long Taper Burr

BUFFING STONES FOR STEELBELTED TIRES



Ascot No.	Mfg. No.	Description
534-80001	A-1	Large Cone - 3/4" Stone Diameter
534-80005	A-5	Small Cone - 3/4" Stone Diameter
534-80011	A-1B	Large Cone 3/4" Stone Diameter (Brown)
534-80015	A-15	Pencil Point - 1/4" Stone Diameter
534-80024	A-24	Round Head Pencil - 1/4" Stone Diameter
534-80036	A-36	Stone Disc - 1-3/4" Diameter
534-80037	A-37	Stone Disc - 1-1/4" Stone Diameter
534-80115	A-15B	Pencil Point - 1/4" Stone Diameter-Brown
534-80136	A-36B	Stone Disc - 1-3/4" Diameter -Brown
534-80137	A-37B	Stone Disc - 1-1/4" Diameter-Brown
534-81115	A-15SS	Pencil Point 1/4" Stone Diameter, Stainless Steel Shank

BUFFING WHEEL

- For use on tires or tubes
- Coarse grit, round nose
- Tungsten carbide




Ascot No.	Mfg. No.	Description
539-10001	BC-1	Buffing Wheel, 2-1/2" diameter





TIRE REPAIR TOOLS & ACCESSORIES



**TIRE SPREADERS & REPAIR STATIONS**



































